

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: AL395

APPLICATION	<ul style="list-style-type: none">• WALL MOUNT• INDOOR OR OUTDOOR RATED• ADA COMPLIANT
DIMENSION	<ul style="list-style-type: none">• 27"H, 36"H, OR 48"H (69CM, 91CM, 122CM)• DEPTH: 3.75" (9.5CM)
ILLUMINATION	<ul style="list-style-type: none">• DIFFUSE AND INDIRECT/DIRECT (OPTIONAL)• LED 90CRI• 2,018 - 2,618 LUMENS• UPLIGHT/DOWNLIGHT (OPTIONAL)
ELECTRICAL	<ul style="list-style-type: none">• 120V, 277V AND 347V• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS PLATED, AND POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING



ALPINE™ SCONCE



PROJECT: _____

TYPE: _____

QUANTITY: _____

AL395

1 2 3 4 5 6 7 8 9 10

1.	I					O				
APPLICATION	INDOOR					OUTDOOR				
2.	27			36			48			
SIZE	7.25"W X 27"H X 3.75"D (19CM X 69CM X 10CM)			7.25"W X 36"H X 3.75"D (19CM X 92CM X 10CM)			7.25"W X 48"H X 3.75"D (19CM X 122CM X 10CM)			
3.	28LED			35LED			42LED			
ILLUMINATION	28W			35W			42W			
LUMENS	2018			2159			2618			
4.	---		U		D		UD			
UP/ ¹ DOWNLIGHT	NONE		UPLIGHT - 6W LED		DOWNLIGHT - 6W LED		6W LED UPLIGHT + 6W LED DOWNLIGHT			
5.	30K			35K			40K			
LED CCT	3000			3500			4000			
6.	120			277			347			
VOLTAGE	120V			277V			347V			
7.	SN²	CH²	BC²	AC²	AB²	SB²	PB²	F04	F05	F09
FINISH	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUÉ COPPER	ANTIQUÉ BRASS	SATIN BRASS	POLISHED BRASS	MATTE WHITE	GLOSS WHITE	PEWTER
	F15	F16	F18	F21	F24	F25	F26	F31	F33	RAL
	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)
8.	SN	CH	BC	AC	AB	SB	PB	F04	F05	F09
ACCENT FINISH	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUÉ COPPER	ANTIQUÉ BRASS	SATIN BRASS	POLISHED BRASS	MATTE WHITE	GLOSS WHITE	PEWTER
	F15	F16	F18	F21	F24	F25	F26	F31	F33	RAL
	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)
9.	OP			SD			FPD			
DIFFUSER	OPAL - WHITE ACRYLIC			SAND - BLASTED WHITE ACRYLIC			FAUX PERFORATED			
10.	---					DIML				
DIMMING ³	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)				

1. UPLIGHT/DOWNLIGHT WOULD BE THE SAME CCT AS THE PRIMARY SOURCE

2. PLATED FINISHES ARE INDOOR APPLICATIONS ONLY




3. USE CURRENT - SINKING DIMMING SYSTEM (BY OTHERS) FOR LED DIMMING. COMPATIBILITY OF THIS PRODUCT IS NOT GUARANTEED WITH ALL CONTROL SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.


AL395 - 27"

AL395 - 36"

SA395 - 48"

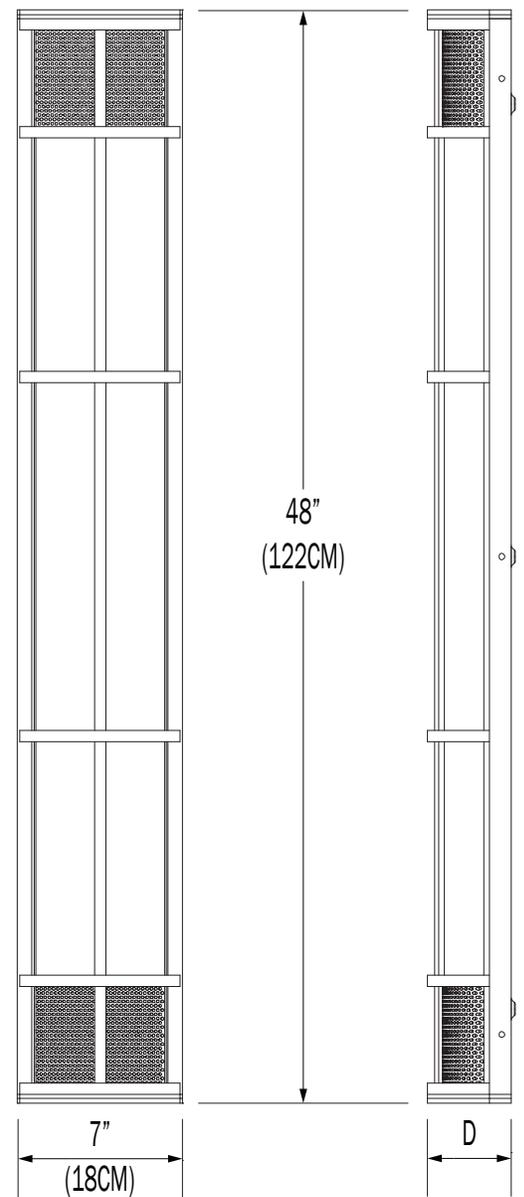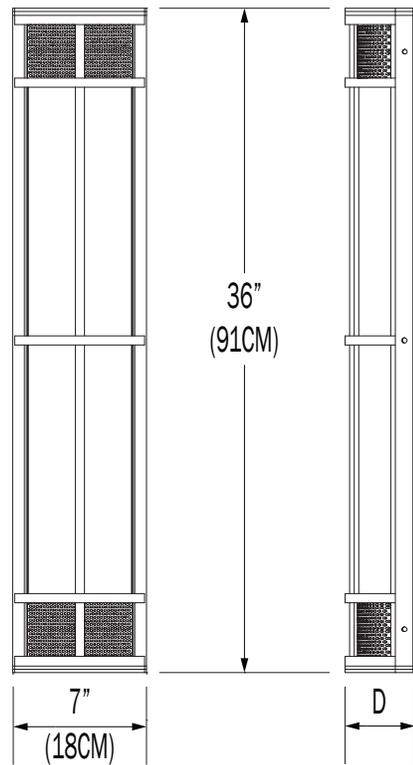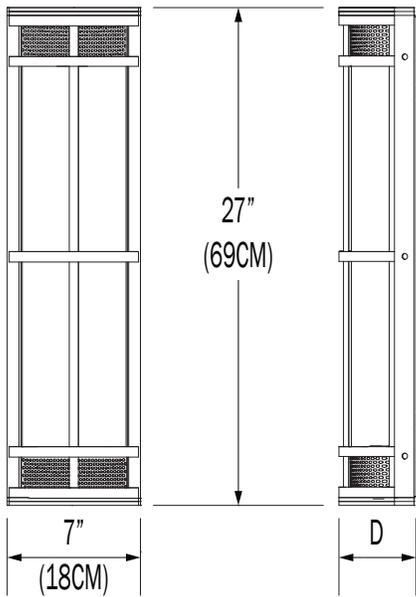

TOP/BOTTOM VIEW
(ALL SIZES)

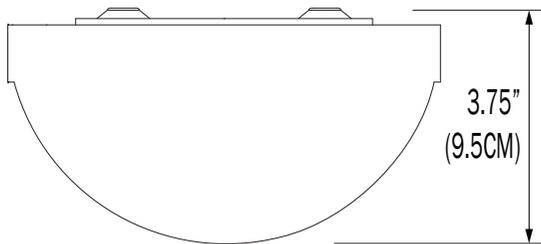

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


DIFFUSE

PN	SIZES	ILLUMINATION	LUMENS	WATTAGE
AL395	27D	28LED	2018	28
	36D	35LED	2159	35
	48D	42LED	2618	42

IES INDOOR REPORT

PHOTOMETRIC FILENAME : AL395 27 28LED.IES

POLAR GRAPH

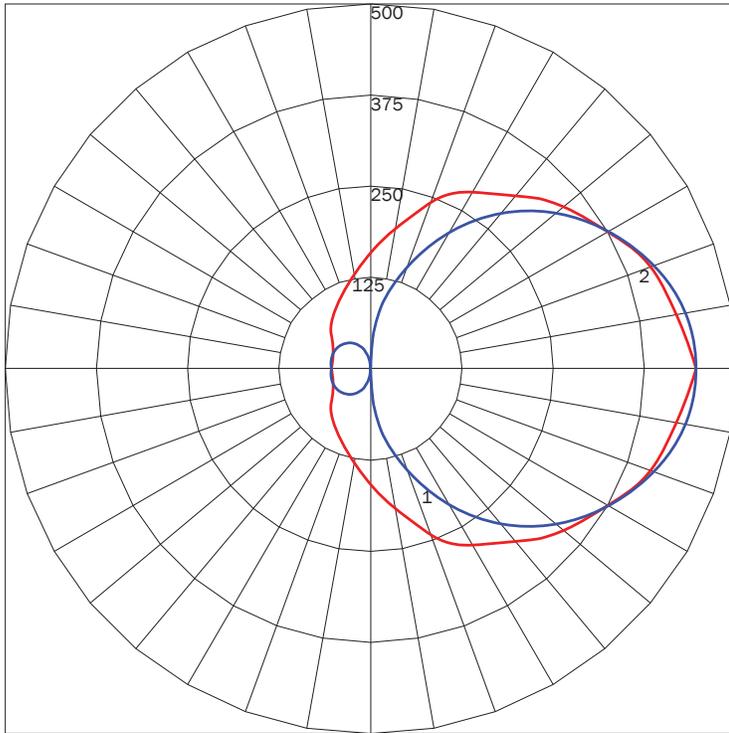

MAXIMUM CANDELA = 445.76 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)


LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

2018
 80%
 NA
 28

IES INDOOR REPORT

PHOTOMETRIC FILENAME : AL395 48 42LED.IES

POLAR GRAPH

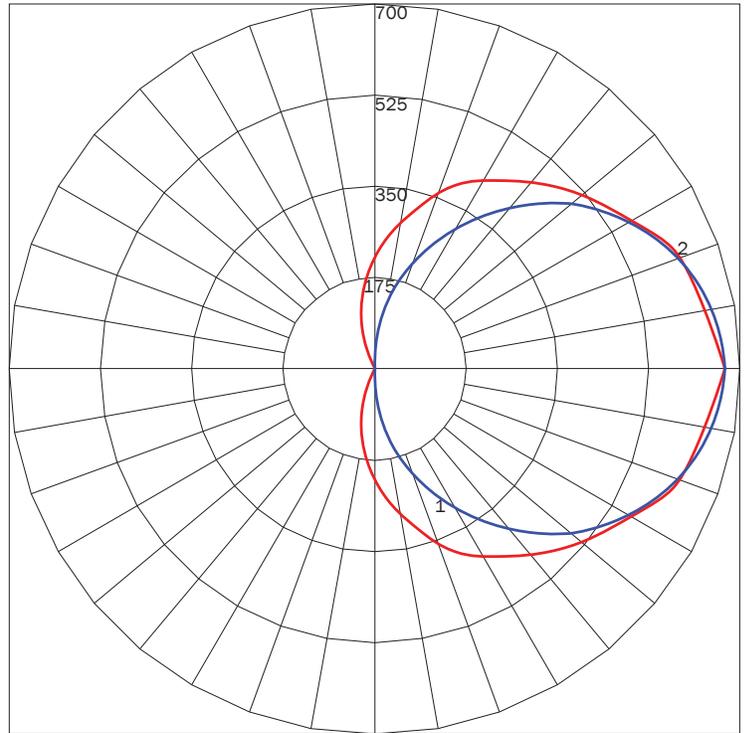

MAXIMUM CANDELA = 671.56 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

2618
 69%
 NA
 42

AVAILABLE FINISHES



SN
SATIN
NICKEL



CH
CHROME



BC
BLACK
CHROME



AC
ANTIQUÉ
COPPER



AB
ANTIQUÉ
BRASS



SB
SATIN
BRASS



PB
POLISHED
BRASS



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.