PROJECT:	
TYPE:	
01144ITITY	



PN: APW

<u> </u>	
APPLICATION	WALL MOUNT
	 INDOOR OR OUTDOOR RATED
DIMENSION	• 18"DIA (46CM)
ILLUMINATION	DIFFUSE
	LED 90CRI
	INCANDESCENT MEDIUM BASE SOCKET
	• 680 - 1,957 LUMENS
ELECTRICAL	• 120V, 277V AND 347V
	 10kA SURGE SUPRESSION STANDARD
DIFFUSERS	INNER: CLEAR, FROSTED, GLASS
	OUTER: HIGH EFFICIENCY ACRYLIC
MOUNTING	 WALL, MOUNTED TO A 4" ROUND J-BOX
CONSTRUCTION	BODY: ALUMINUM
	 REFLECTOR: ALUMINUM, BRUSHED COPPER
	OR STAINLESS STEEL
FINISHES	AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES
	 CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	8 LBS MAXIMUM





PROJECT:	
TYPE:	
QUANTITY:	

APW								
	1	2	3	4	5	6	7	8

1.	L				()
APPLICATION	IND			OUT	DOOR	
2.	15			19	LED	
ILLUMINATION	150W INCANDESCENT			19W LED		
LED (W)	150W			19W		
LUMENS	703 W/CO		680 W/SS	792 W/C0		1957 W/SS
3.			30K	35K		40K
LED CCT	NONE	3000К		3500K		4000K
4	120		2.	77		247

4.	120	277	347
VOLTAGE	120V	277V	347V

5.	F04	F05	F07	F08	F09	F10	F13	F15	F16	F18
	MATTE WHITE	GLOSS WHITE	ZEUS BROWN	MIDNIGHT BLUE	PEWTER	FIRE RED	FOREST GREEN	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM
FINISH	F21	F31	F32	F33	F45	RAL				
	ARCH BRONZE	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE	COPPER METALLIC	CUSTOM (SPECIFY)				


ь.	00	AN	CO _T	SS
REFLECTOR	SAME FINISH	ANODIZED	SOLID	STAINLESS
FINISH	SAME FINISH	ANODIZED	COPPER	STEEL
_				

7.		DIML
DIMMING	NONE	LED DIMMING (0 - 10V, CURRENT - SINKING)

8.		EMR	EMCR
EMERGENCY ²	NONE	REMOTE	REMOTE COLD PACK

^{1.} A CLEAR COAT IS APPLIED TO THE BRUSH COPPER. PATINA WILL FORM OVER TIME 2. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

APW

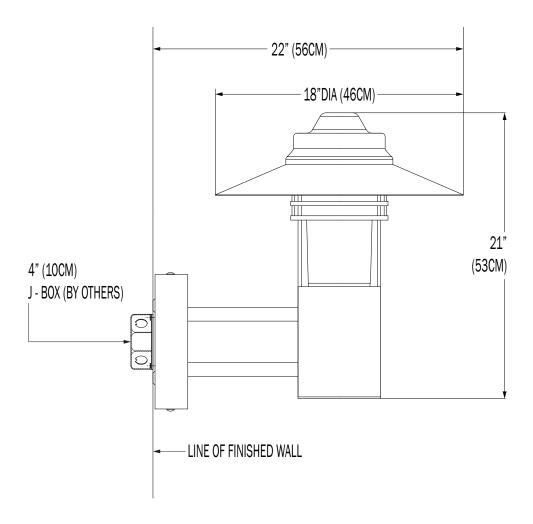

CUSTOM

DIFFUSE

PN	ILLUMINATION	REFLECTOR FINISH	LUMENS	WATTAGE
	19LED	SS	680	19
APW		CO	703	19
APW	150IN	CO	792	150
	TOUN	SS	1957	150


IES INDOOR REPORT

PHOTOMETRIC FILENAME: APW 19LED F16 SS.IES

IES INDOOR REPORT


PHOTOMETRIC FILENAME: APW 150IN SS.IES

POLAR GRAPH

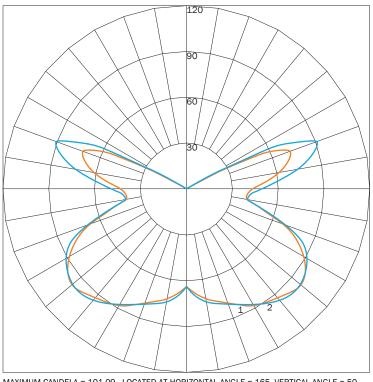

MAXIMUM CANDELA = 101.09 LOCATED AT HORIZONTAL ANGLE = 165, VERTICAL ANGLE = 50 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

POLAR GRAPH

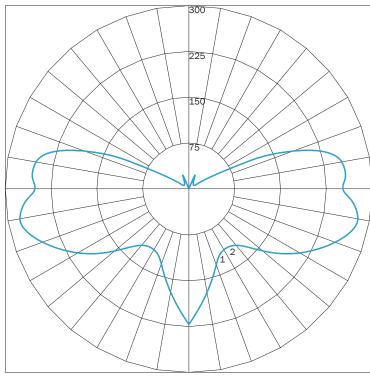

MAXIMUM CANDELA = 280.75 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 80 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

680	LUMINAIRE LUMENS	1957
NA	TOTAL LUMINAIRE EFFICIENCY	72%
31	LUMINAIRE EFFICACY RATING	13
22	TOTAL LUMINAIRE WATTS	150

APOLLO[™]

AVAILABLE FINISHES



F04 **MATTE** WHITE



F05 **GLOSS** WHITE



F07 **ZEUS BROWN**



F08 **MIDNIGHT BLUE**



F09 **PEWTER**



F10 FIRE RED



F13 FOREST GREEN



F15 MATTE BLACK



GLOSS BLACK



F18 SATIN **ALUMINUM**



F21 **ARCH BRONZE**



F31 **SILVER METALLIC**



F32 **METALLIC** BRONZE



F33 **PYRITE BRONZE**



F45 **COPPER** METALLIC



RAL CUSTOM COLOR (RAL #)

1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE. 2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE. MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABLILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP. DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR. ALL FINISHES MAY NOT BE AVAILABLE FOR ALL PRODUCTS. CONSULT THE PRODUCT SPECIFICATIONS FOR MORE INFORMATION.

