

CAMBRIDGE 03™ SCONCE

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: CA10003

APPLICATION	<ul style="list-style-type: none">• WALL MOUNT• INDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 13"H, 18"H, 24"H (33CM, 46CM, 61CM)• DEPTH: 3.87" (9.9CM)
ILLUMINATION	<ul style="list-style-type: none">• DIFFUSE• LED 90CRI• 654 - 928 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120V, 277V AND 347V• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	<ul style="list-style-type: none">• STEEL
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS PLATED, AND POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING



DIFFUSE

CAMBRIDGE 03™ SCONCE



PROJECT: _____

TYPE: _____

QUANTITY: _____

CA10003


1 2 3 4 5 6 7

1.	13			18			24			
SIZE	8.5"W X 13"H X 4"D (22CM X 33CM X 10CM)			9"W X 18"H X 4"D (23CM X 46CM X 10CM)			10"W X 24"H X 4"D (25CM X 61CM X 10CM)			
2.										
ILLUMINATION	14LED			14LED		RGB (18LED)		28LED		
LED (W)	14W			14W		18W		28W		
LUMENS	683			654		---		928		
3.	---			30K			35K		40K	
LED CCT	NONE			3000			3500		4000	
4.	120			277			347			
VOLTAGE	120V			277V			347V			
5.	SN	CH	BC	AC	AB	SB	PB	F04	F05	F09
FINISH	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUE COPPER	ANTIQUE BRASS	SATIN BRASS	POLISHED BRASS	MATTE WHITE	GLOSS WHITE	PEWTER
	F15	F16	F18	F24	F25	F26	F31	F33	RAL	
	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)	
6.	OP			SD			FPD			
DIFFUSER	OPAL - WHITE ACRYLIC			SAND - BLASTED WHITE ACRYLIC			FAUX PERFORATED			
7.	---			DIML						
DIMMING	NONE			LED DIMMING (0 - 10V, CURRENT - SINKING)						


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

PROFILE


CA10003 - 13"

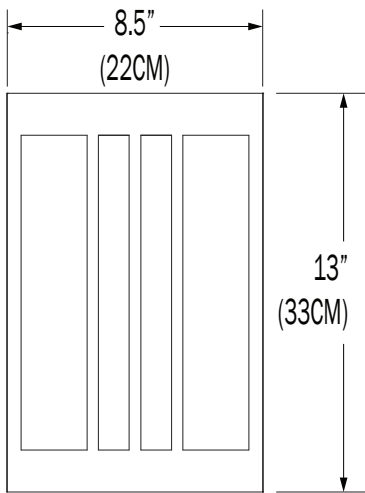


CA10003 - 18"

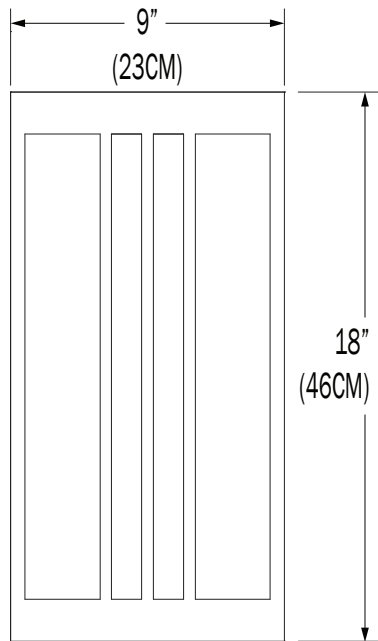

CA10003 - 24"

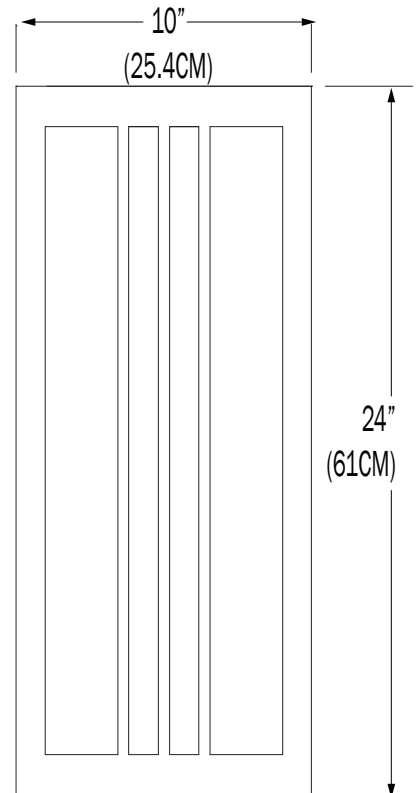

TOP/BOTTOM

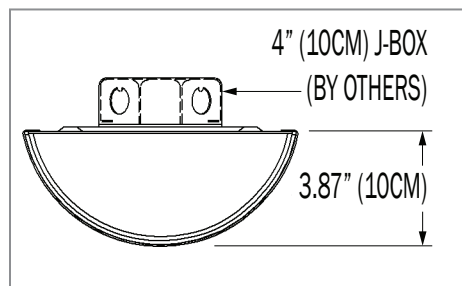

DIFFUSE

PN	SIZES	ILLUMINATION	DIFFUSER	LUMENS	WATTAGE
CA10003	13	14LED	OP	683	14
	18	14LED	OP	654	14
	24	28LED	OP	928	28


IES INDOOR REPORT

PHOTOMETRIC FILENAME : CA10003 18 14LED F05 OP.IES

IES INDOOR REPORT

PHOTOMETRIC FILENAME : CA10003 24 28LED F05.IES

POLAR GRAPH

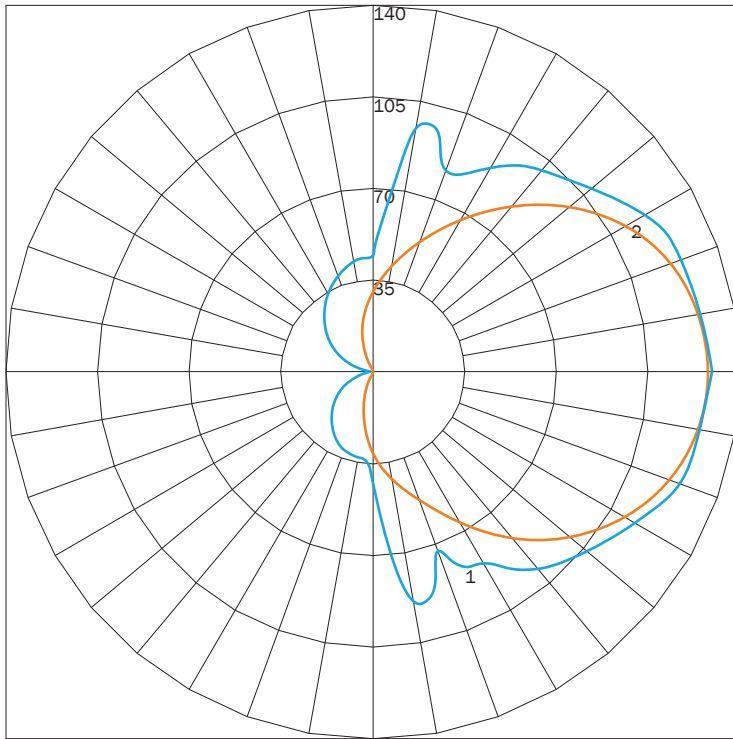


MAXIMUM CANDELA = 129.61 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

654
 NA
 41
 16

POLAR GRAPH

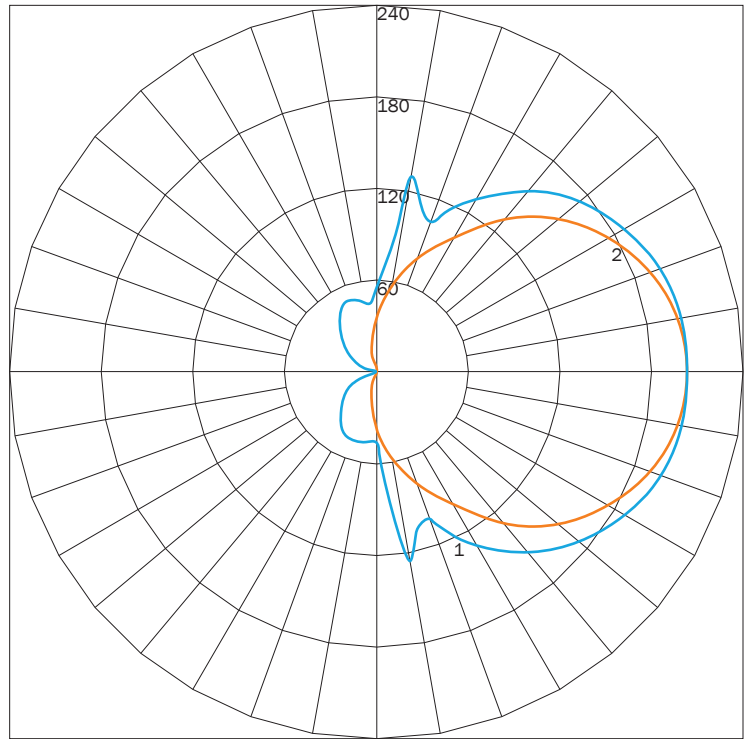

MAXIMUM CANDELA = 204.94 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

928
 NA
 33
 28

AVAILABLE FINISHES



SN
SATIN
NICKEL



CH
CHROME



BC
BLACK
CHROME



AC
ANTIQUÉ
COPPER



AB
ANTIQUÉ
BRASS



SB
SATIN
BRASS



PB
POLISHED
BRASS



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.