TYPE: QTY: PROJECT:





PRODUCT #	6001
APPLICATION	PENDANT MOUNT INDOOR RATED
DIMENSIONS	• 17", 24", 32", 40", AND 48" (43CM, 61CM, 81CM, 102CM, AND 122CM)
ILLUMINATION	• INDIRECT/DIRECT • LED 90 CRI • 650 - 1,880 LUMEN RANGE
DRIVER	• 120 - 277V UNI • 10kA STANDARD SURGE SUPRESSION
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	• 120" (305CM) POWER OVER SUSPENSION
CONSTRUCTION	• STEEL
FINISHES	AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0-10V STANDARD DIMMING
WEIGHT	• 5LBS - 15LBS









PROJECT: TYPE: _____ QTY: ____

1 2 3 4 5 6001


1.	17	24	32	40	48
DIAMETER	17"DIA. (43CM)	24"DIA. (61CM)	32"DIA. (81CM)	40"DIA. (102CM)	48"DIA. (122CM)
LED (W)	13W	19W	25W	31W	37W
LUMENS	650	938	1251	1563	1880

2.	30К	35К	40К
LED CCT	3000	3500	4000

3.	UNI
VOLTAGE	120V - 277V

4.	ADDITIONAL AND PREMIUM FINISHES	F04	F05	F15	F16	F09	F31	F18
FINISH	AVAILABLE. SEE FINISHES CHART	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM

5.		DIML	
DIMMING	NONE	0 - 10V DIMMING (1%)	

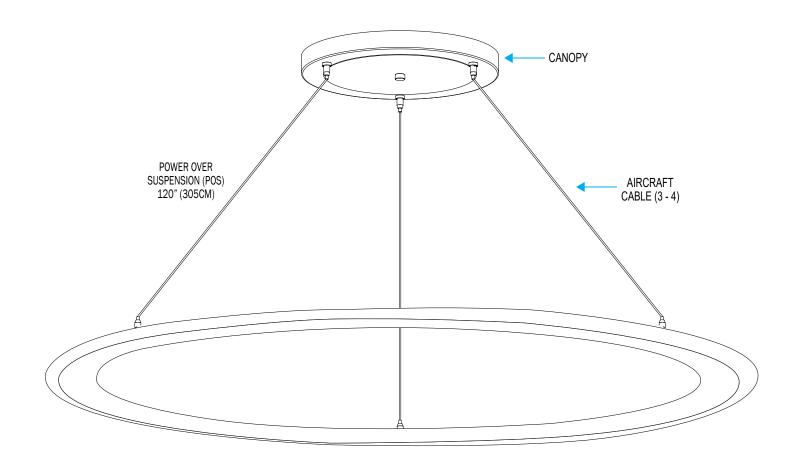

NOTE: J-BOX BY OTHERS


CIRCA - 17" DIA. (43CM)



OUTER DIAMETER: 16.5" (42CM) INNER DIAMETER: 11.42" (29CM)

5 LB


CIRCA - 24" DIA. (61CM)



OUTER DIAMETER: 23.6" (60CM) INNER DIAMETER: 18.5" (47CM)

7 LB


CIRCA - 32" DIA. (81CM)



OUTER DIAMETER: 31.5" (80CM) INNER DIAMETER: 24.8" (63CM)

10 LB


CIRCA - 40" DIA. (102CM)



OUTER DIAMETER: 39.4" (100CM) INNER DIAMETER: 32.7" (83CM)

12 LB

CIRCA - 48" DIA. (122CM)



OUTER DIAMETER: 47.25" (120CM) INNER DIAMETER: 40.6" (103CM)

15 LB

DIRECT LIGHTING

PN	LUMENS	WATTAGE
17	650	13
24	938	19
25	1251	25
40	1563	31
48	1880	37


IES INDOOR REPORT

PHOTOMETRIC FILENAME: 6001 17 13LED.IES

IES INDOOR REPORT

PHOTOMETRIC FILENAME: 6001 48 13LED.IES

POLAR GRAPH

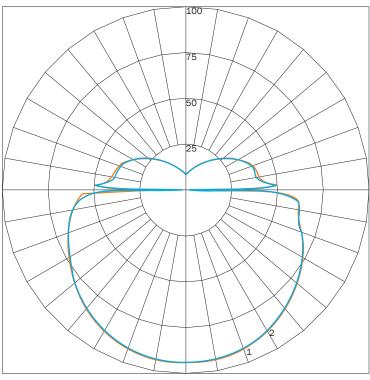


MAXIMUM CANDELA = 94.185 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 2 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)

MINAIDE LUMENS

2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

POLAR GRAPH

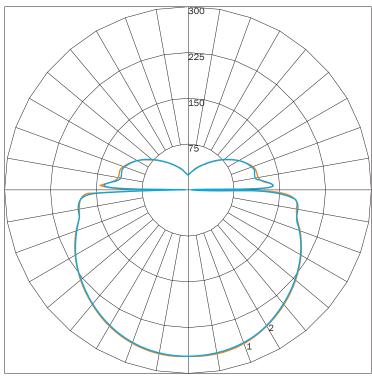

MAXIMUM CANDELA = 272.499 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 2

1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)

2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

665	LUMINAIRE LUMENS	1889
98%	TOTAL LUMINAIRE EFFICIENCY	98%
50	LUMINAIRE EFFICACY RATING	50
13	TOTAL LUMINAIRE WATTS	37

STANDARD



F04 MATTE WHITE



F05 GLOSS WHITE



F15 MATTE BLACK



F16 GLOSS BLACK



F09 PEWTER



F31 SILVER METALLIC



F18 SATIN ALUMINUM



F21 ARCH BRONZE

PREMIUM



RAL CUSTOM (RAL #)



F40 BUBBLE PINK



F10 FIRE RED



F41 ELECTRIC PURPLE



F08 MIDNIGHT BLUE



F39 AQUA BLUE



F13 FOREST GREEN



F38 MEADOW GREEN



F45 COPPER METALLIC



F06 CLAY BROWN



F11 CITRUS ORANGE



F28 DARK CHAMPAGNE



F22 HARVEST GOLD



F14 SUNSHINE YELLOW



F33 PYRITE BRONZE



F07 ZEUS BROWN



F32 BRONZE METALLIC



F26 MELTED COPPER



F25 MELTED GOLD



F24 MELTED PLATINUM



F44 FAUX COPPER



F43 FAUX GOLD



F42 FAUX CHROME

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.