CIRCA 6001TM PENDANT

PROJECT: _

TYPE:

QUANTITY: _



PN: 6001

APPLICATION	PENDANT MOUNTINDOOR		
DIMENSION	 17", 24", 32", 40", AND 48" (43CM, 61CM, 81CM, 102CM, 122CM) 		
ILLUMINATION	 INDIRECT/DIRECT LED 90CRI 650 - 1,880 LUMENS 		
DRIVER	120 - 277V10kA SURGE SUPRESSION STANDARD		
DIFFUSERS	HIGH EFFICIENCY ACRYLIC		
MOUNTING	 96" (244CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES 		
CONSTRUCTION	• STEEL		
FINISHES	POWDER COATED MATTE WHITE FINISH		
DIMMING	0 - 10V STANDARD DIMMING		
WEIGHT	• 5 LBS MINIMUM, 15 LBS MAXIMUM		







CIRCA 6001[™] PENDANT

PROJECT: _____

TYPE:

QUANTITY: _____

6001 -.... $\frac{1}{2}$ $\frac{3}{3}$ $\frac{4}{4}$ $\frac{5}{5}$

1.	17	24	24 32		40		48
DIAMETER	17"DIA. (43CM)	24"DIA. (61C	M) 32"DIA	. (81CM)	40"	DIA. (102CM)	48"DIA. (122CM)
LED (W)	13W	19W	2	5W		31W	37W
LUMENS	650	938	12	251		1563	1880
2.	30K	K 35F		5K	40К		40K
LED CCT	3000	3500		500	4000		4000
3.	120			277			
VOLTAGE	120V				277V		
4.	MW						
FINISH	MATTE WHITE						
5.	_			DIML			
DIMMING	NONE			0 - 10V DIMMING (1%)			

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.







TMSLIGHTING




DIAMETER (INCH)	WEIGHT (LBS)
17" (43CM)	5 LB
24" (61CM)	7 LB
32" (81CM)	10 LB
40" (102CM)	12 LB
48" (122CM)	15 LB




















CIRCA 6001[™] PENDANT

TMSLIGHTING



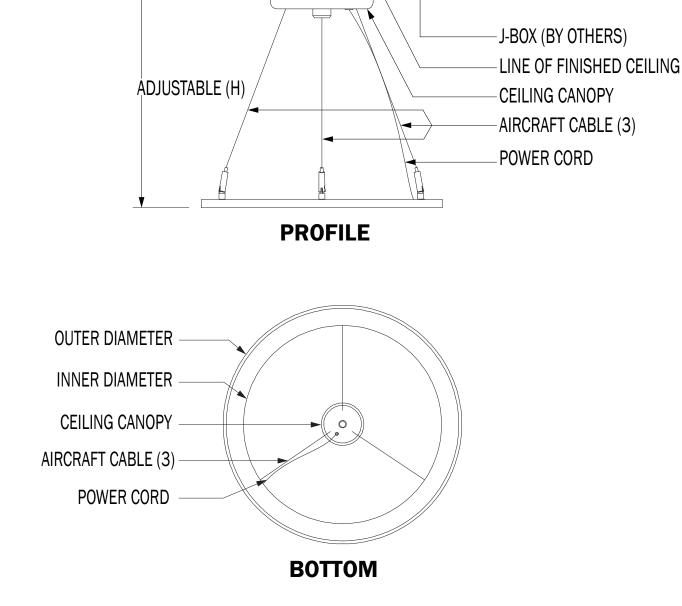

6001

0

0

CIRCA 6001TM PENDANT

CIRCA 6001[™] PENDANT

DIRECT


PN	LUMENS	WATTAGE
17	650	13
24	938	19
25	1251	25
40	1563	31
48	1880	37

50

13

IES INDOOR REPORT PHOTOMETRIC FILENAME: 6001 17 13LED.IES

POLAR GRAPH

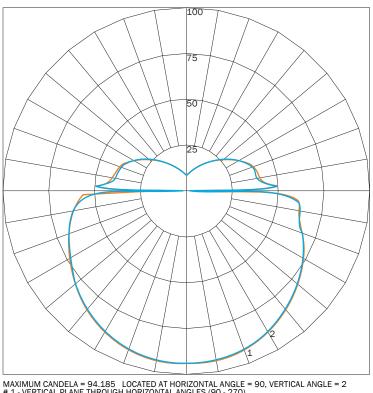


MAXIMUM CANDELA = 94.185 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 2 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS 665 **TOTAL LUMINAIRE EFFICIENCY** 98% LUMINAIRE EFFICACY RATING **TOTAL LUMINAIRE WATTS**

IES INDOOR REPORT PHOTOMETRIC FILENAME: 6001 48 13LED.IES

POLAR GRAPH

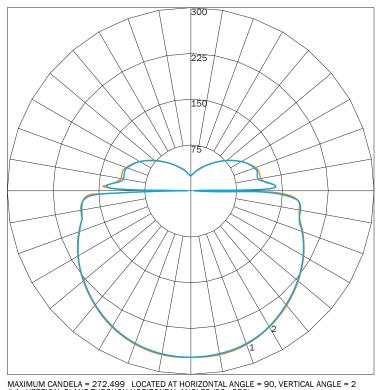

MAXIMUM CANDELA = 272.499 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 2 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)


LUMINAIRE LUMENS	1889
TOTAL LUMINAIRE EFFICIENCY	98%
LUMINAIRE EFFICACY RATING	50
TOTAL LUMINAIRE WATTS	37





CIRCA 6001[™] PENDANT

AVAILABLE FINISHES



NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.



