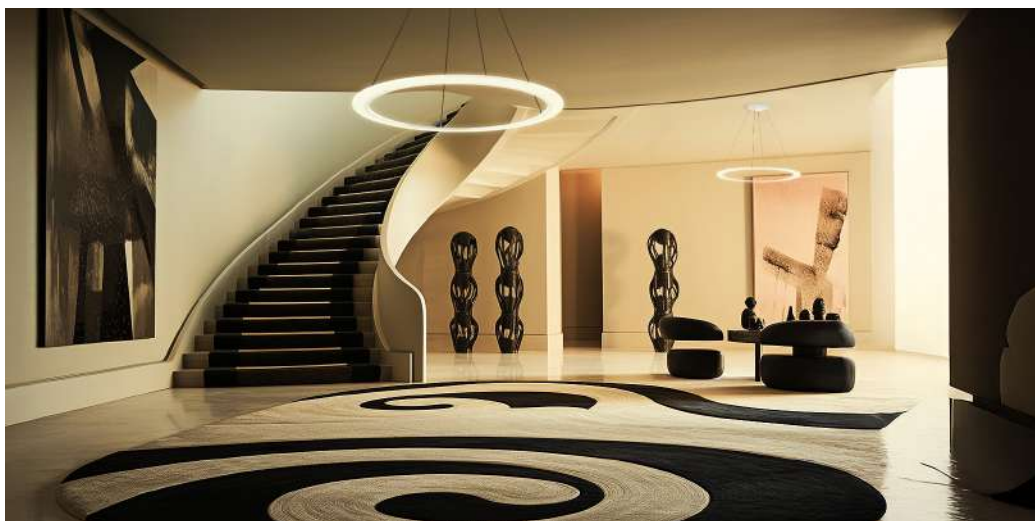


PROJECT: TYPE: QTY: 

PRODUCT

6002

APPLICATION

- PENDANT MOUNT
- INDOOR RATED

DIMENSIONS

- 17", 24", 32", 40", AND 48"
(43CM, 61CM, 81CM, 102CM, AND 122CM)

ILLUMINATION

- INDIRECT/DIRECT
- LED 90 CRI
- 1,905 - 8,129 LUMEN RANGE

DRIVER

- 120 - 277V UNI
- 10KA STANDARD SURGE SUPPRESSION

DIFFUSERS

- HIGH EFFICIENCY ACRYLIC

MOUNTING

- 120" (305CM) POWER OVER SUSPENSION

CONSTRUCTION

- STEEL

FINISHES

- AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES
- CUSTOM RAL FINISHES AVAILABLE

DIMMING

- 0-10V STANDARD DIMMING (1%)

WEIGHT

- 5LBS - 15LBS

INDIRECT/
DIRECT

INDOOR



Intertek



PROJECT: TYPE: QTY:

6002 - - - - -

1 2 3 4 5


1.	17	24	32	40	48
DIAMETER	17"DIA. (43CM)	24"DIA. (61CM)	32"DIA. (81CM)	40"DIA. (102CM)	48"DIA. (122CM)
LED (W)	13W	19W	25W	31W	37W
LUMENS	650	938	1251	1563	1880

2.	30K	35K	40K
LED CCT	3000	3500	4000

3.	UNI
VOLTAGE	120V - 277V


4.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F16	F09	F31	F18
FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM

5.	---	DIML
DIMMING	NONE	0 - 10V DIMMING (1%)

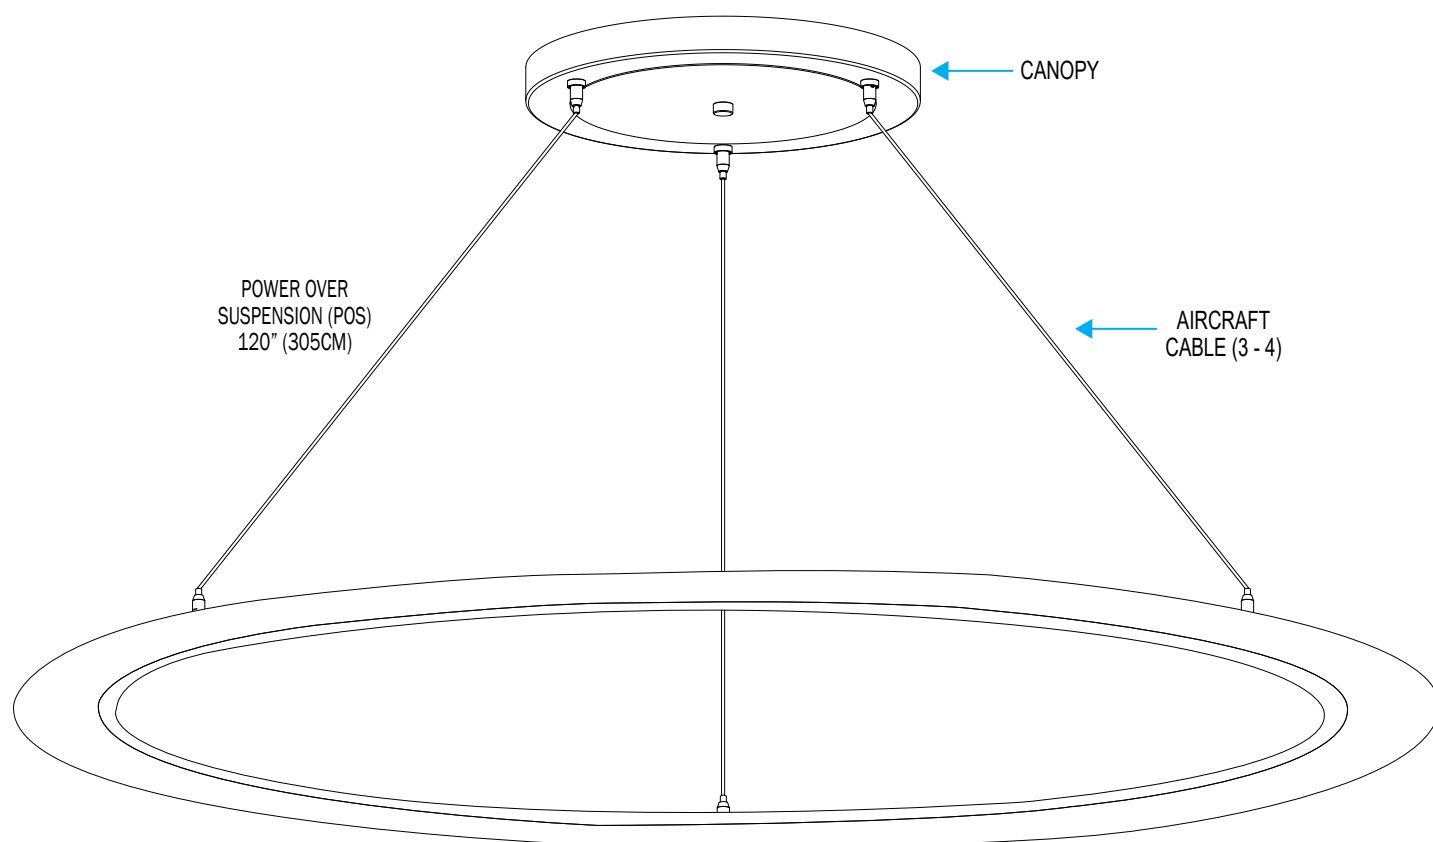

NOTE: J-BOX BY OTHERS


CIRCA - 17" DIA. (43CM)



OUTER DIAMETER: 16.5" (42CM)
INNER DIAMETER: 11.42" (29CM)

5 LB


CIRCA - 24" DIA. (61CM)



OUTER DIAMETER: 23.6" (60CM)
INNER DIAMETER: 18.5" (47CM)

7 LB


CIRCA - 32" DIA. (81CM)



OUTER DIAMETER: 31.5" (80CM)
INNER DIAMETER: 24.8" (63CM)

10 LB


CIRCA - 40" DIA. (102CM)

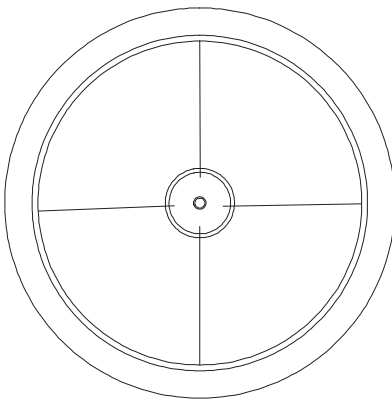

OUTER DIAMETER: 39.4" (100CM)
INNER DIAMETER: 32.7" (83CM)

12 LB

CIRCA - 48" DIA. (122CM)

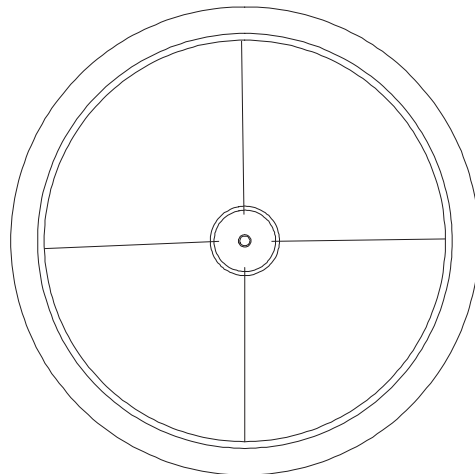

OUTER DIAMETER: 47.25" (120CM)
INNER DIAMETER: 40.6" (103CM)

15 LB


DIRECT LIGHTING

PN	SIZE (DIA)	ILLUMINATION	LUMENS	WATTAGE
6002	17	11LED	1905	15
	24	32LED	3991	30
	32	36LED	5080	40
	40	45LED	6350	50
	48	61LED	8129	60

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 6002 17 11LED.IES

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 6002 48 61LED.IES


POLAR GRAPH

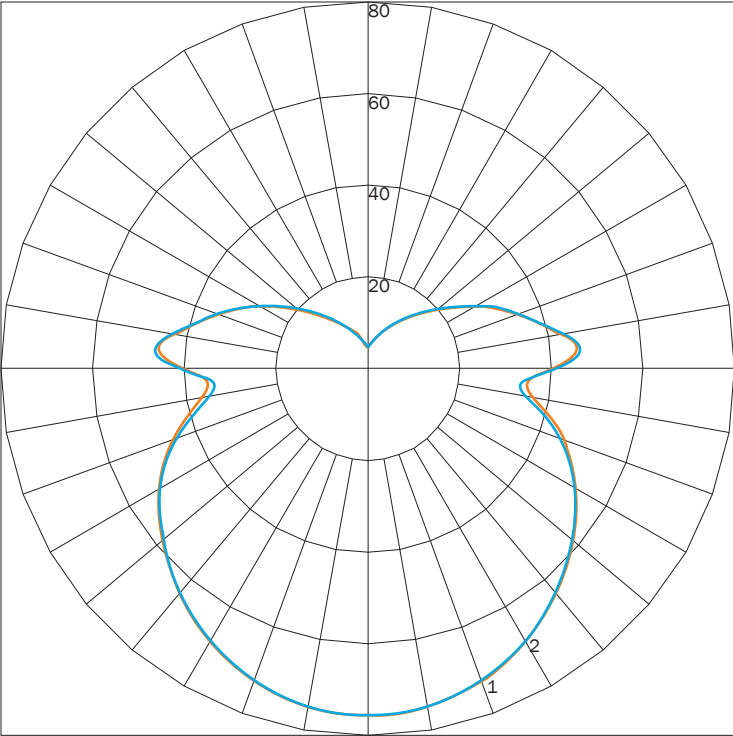

MAXIMUM CANDELA = 75.882 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 1
1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	1905
TOTAL LUMINAIRE EFFICIENCY	98%
LUMINAIRE EFFICACY RATING	127
TOTAL LUMINAIRE WATTS	15

POLAR GRAPH

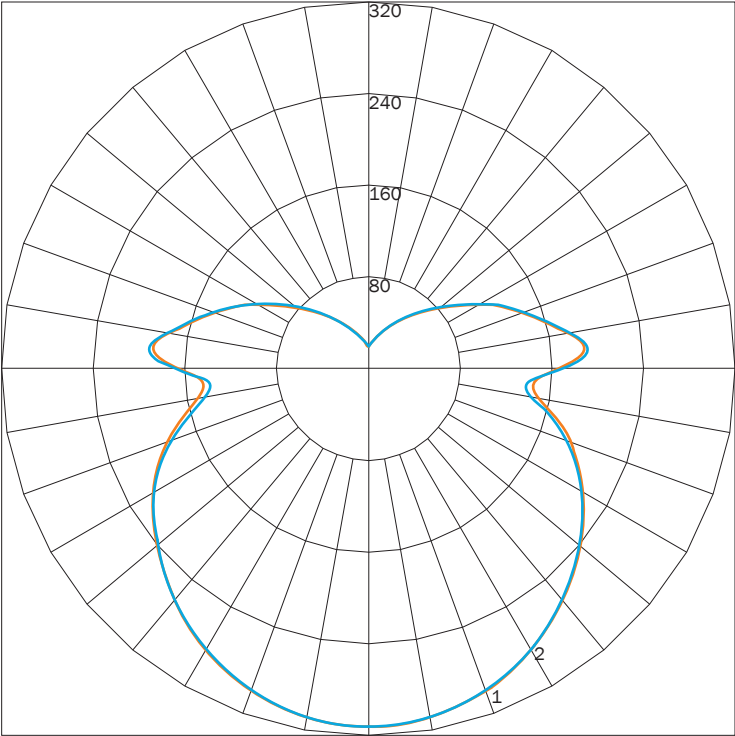


MAXIMUM CANDELA = 313.012 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 1
1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	8129
TOTAL LUMINAIRE EFFICIENCY	98%
LUMINAIRE EFFICACY RATING	133
TOTAL LUMINAIRE WATTS	60

STANDARD

**F04**
MATTE
WHITE**F05**
GLOSS
WHITE**F15**
MATTE
BLACK**F16**
GLOSS
BLACK**F09**
PEWTER**F31**
SILVER
METALLIC**F18**
SATIN
ALUMINUM**F21**
ARCH
BRONZE

PREMIUM

**RAL**
CUSTOM
(RAL #)**F40**
BUBBLE
PINK**F10**
FIRE
RED**F41**
ELECTRIC
PURPLE**F08**
MIDNIGHT
BLUE**F39**
AQUA
BLUE**F13**
FOREST
GREEN**F38**
MEADOW
GREEN**F45**
COPPER
METALLIC**F06**
CLAY
BROWN**F11**
CITRUS
ORANGE**F28**
DARK
CHAMPAGNE**F22**
HARVEST
GOLD**F14**
SUNSHINE
YELLOW**F33**
PYRITE
BRONZE**F07**
ZEUS
BROWN**F32**
BRONZE
METALLIC**F26**
MELTED
COPPER**F25**
MELTED
GOLD**F24**
MELTED
PLATINUM**F44**
FAUX
COPPER**F43**
FAUX
GOLD**F42**
FAUX
CHROME

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.