


PROJECT: _____

TYPE: _____

QUANTITY: _____

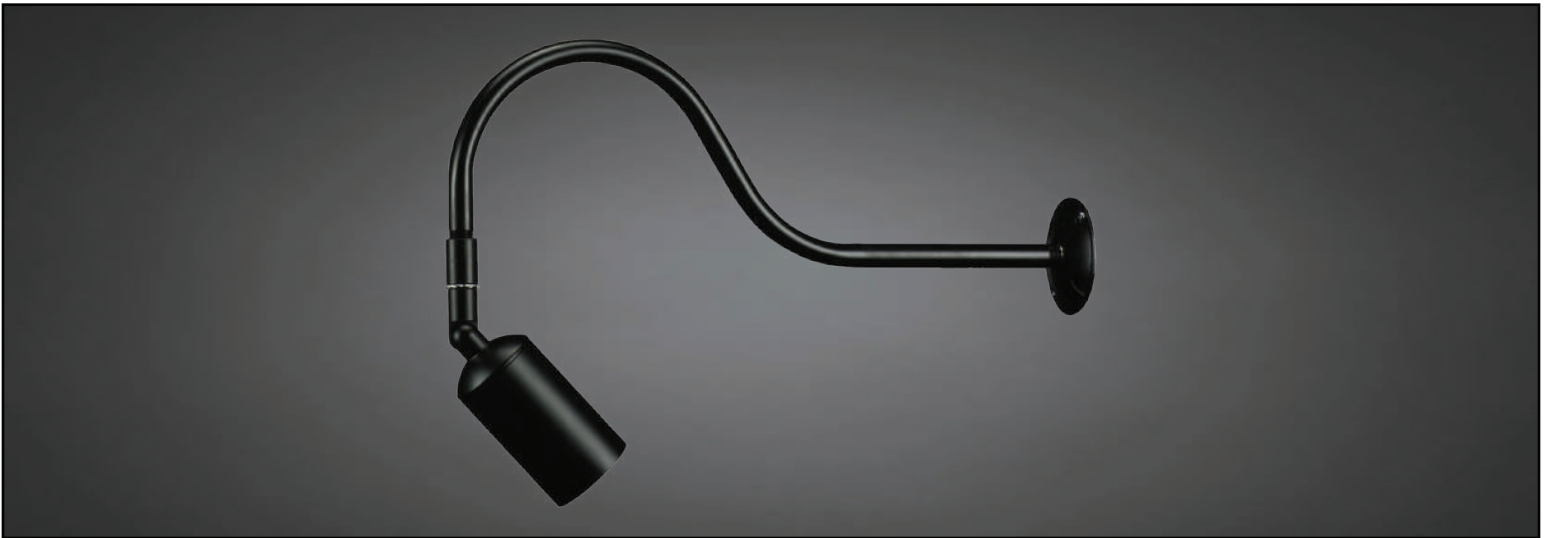

PN: D18

APPLICATION	<ul style="list-style-type: none">• WALL MOUNT• INDOOR OR OUTDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 2.375" DIA (6CM)
ILLUMINATION	<ul style="list-style-type: none">• DIRECT• 17W LED (3000K ONLY)• 209 - 436 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120V• 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• UV STABILIZED TEMPERED GLASS
MOUNTING	<ul style="list-style-type: none">• WALL, MOUNTED OVER A 4"(10CM) J-BOX
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN WHITE, OR MATTE BLACK POWDER COATED FINISHES





D18™ WALL

PROJECT: _____

TYPE: _____

QUANTITY: _____


D18 - - - - -
 1 2 3

1.	ILLUMINATION		
	17LED		
LED (W)	17W LED (3000K ONLY)		
LUMENS	209		
2.	120		
VOLTAGE	120V		
3.	F04	F05	F15
FINISH	MATTE WHITE	GLOSS WHITE	MATTE BLACK

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

D18

PROFILE VIEW

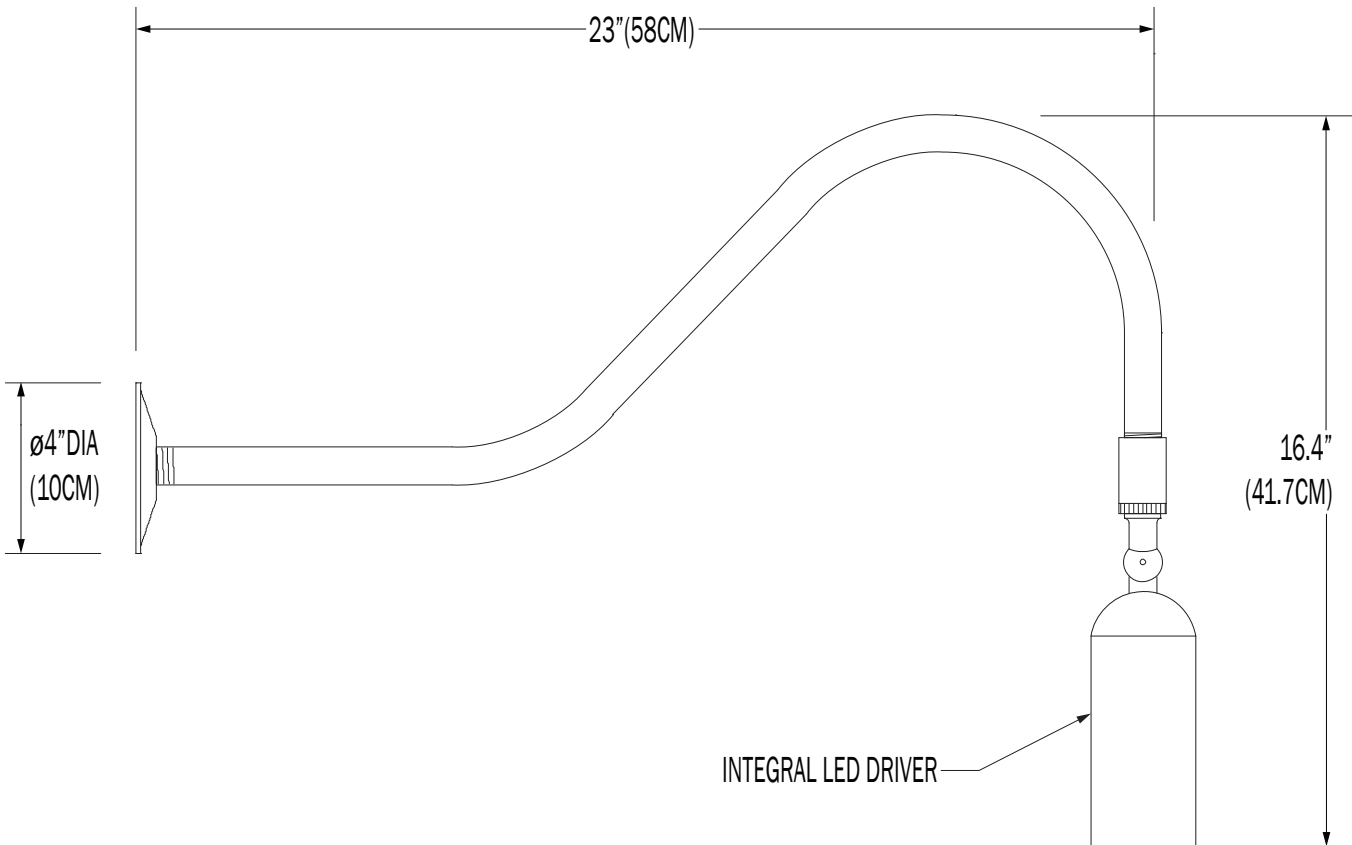

CUSTOM


NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

DIRECT

PN	ILLUMINATION	LUMENS	WATTAGE
D18	17LED	209	9

IES INDOOR REPORT
PHOTOMETRIC FILENAME : D18 AL1 8LED.IES

POLAR GRAPH

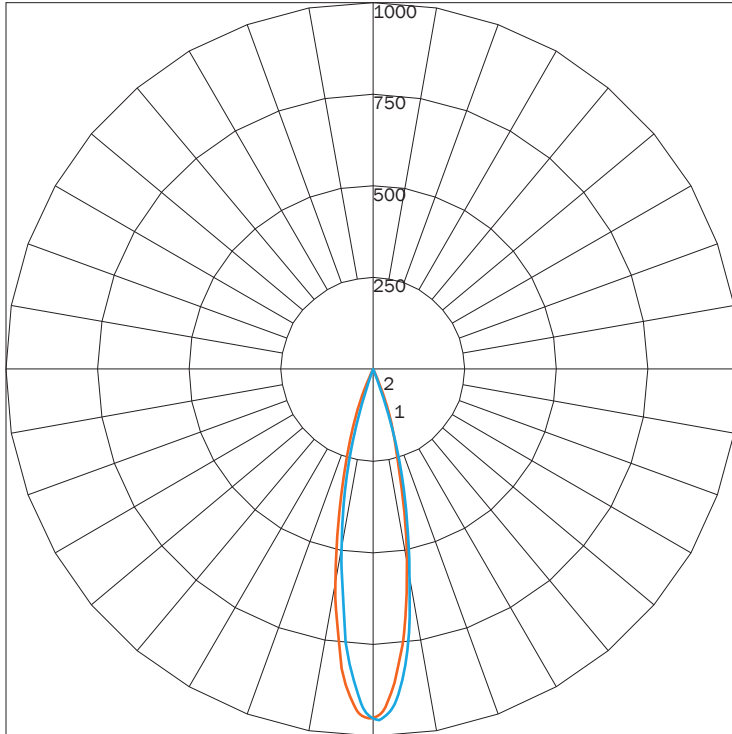


MAXIMUM CANDELA = 957.665 LOCATED AT HORIZONTAL ANGLE = 330, VERTICAL ANGLE = 1
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	209
TOTAL LUMINAIRE EFFICIENCY	72%
LUMINAIRE EFFICACY RATING	24
TOTAL LUMINAIRE WATTS	9

IES INDOOR REPORT
PHOTOMETRIC FILENAME : D18 AL1 50HAL FL.IES

POLAR GRAPH

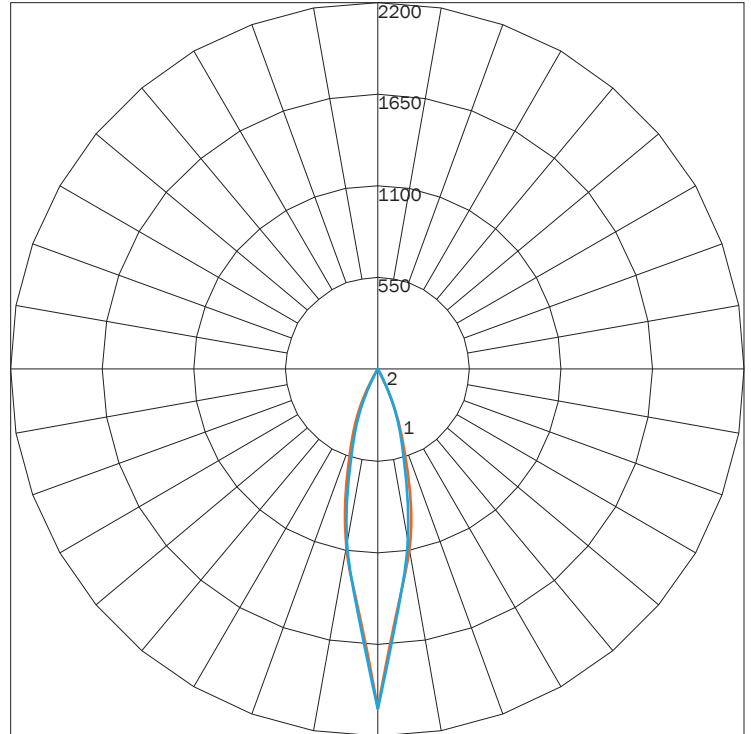

MAXIMUM CANDELA = 2034.446 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	436
TOTAL LUMINAIRE EFFICIENCY	82%
LUMINAIRE EFFICACY RATING	9
TOTAL LUMINAIRE WATTS	50

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F15
MATTE
BLACK

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.