

# DISCO™ PENDANT

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

QUANTITY: \_\_\_\_\_



## PN: 350DI

<b>APPLICATION</b>	<ul style="list-style-type: none"><li>• PENDANT MOUNT</li><li>• INDOOR RATED</li></ul>
<b>DIMENSION</b>	<ul style="list-style-type: none"><li>• 18", 24" (46CM, 61CM)</li></ul>
<b>ILLUMINATION</b>	<ul style="list-style-type: none"><li>• DIRECT</li><li>• LED 90CRI</li><li>• 2,622 - 2,657 LUMENS</li></ul>
<b>ELECTRICAL</b>	<ul style="list-style-type: none"><li>• 120 - 277V OR UNI (120 - 277V)</li><li>• 10kA SURGE SUPPRESSION STANDARD</li></ul>
<b>DIFFUSERS</b>	<ul style="list-style-type: none"><li>• HIGH EFFICIENCY ACRYLIC</li></ul>
<b>MOUNTING</b>	<ul style="list-style-type: none"><li>• 84" (213CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE</li></ul>
<b>CONSTRUCTION</b>	<ul style="list-style-type: none"><li>• ALUMINUM AND STEEL</li></ul>
<b>FINISHES</b>	<ul style="list-style-type: none"><li>• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES</li><li>• CUSTOM RAL FINISHES AVAILABLE</li></ul>
<b>DIMMING</b>	<ul style="list-style-type: none"><li>• 0 - 10V STANDARD DIMMING (1%)</li><li>• LUTRON (1%) DIMMING OPTIONAL</li></ul>
<b>WEIGHT</b>	<ul style="list-style-type: none"><li>• 8.5 LBS MAXIMUM</li></ul>



# DISCO™ PENDANT



PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

## 350DI



1 2 3 4 5 6 7 8 9

<b>1.</b>	<b>18</b>					<b>24</b>				
DIAMETER	18" DIA. (46CM)					24" DIA. (61CM)				
<b>2.</b>										
ILLUMINATION	<b>20LED</b>		<b>30LED</b>			<b>20LED</b>		<b>30LED</b>		
LED (W)	20W		30W			20W		30W		
LUMENS	---		2622			---		2657		
<b>3.</b>	<b>30K</b>			<b>35K</b>			<b>40K</b>			
LED CCT	3000K			3500K			4000K			
<b>4.</b>	<b>120</b>			<b>277</b>			<b>UNI</b>			
VOLTAGE	120V			277V			120 - 277V			
<b>5.</b>	<b>BC</b>					<b>WC</b>				
CORD	BLACK DROP CORD					WHITE DROP CORD				
<b>6.</b>	<b>F04</b>	<b>F05</b>	<b>F15</b>	<b>F16</b>	<b>F09</b>	<b>F31</b>	<b>F18</b>	<b>F06</b>	<b>F07</b>	<b>F08</b>
FINISH	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM	CLAY BROWN	ZEUS BROWN	MIDNIGHT BLUE
	<b>F10</b>	<b>F11</b>	<b>F13</b>	<b>F14</b>	<b>F21</b>	<b>F22</b>	<b>F24</b>	<b>F25</b>	<b>F26</b>	<b>F28</b>
	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	DARK CAMPAGNE
	<b>F32</b>	<b>F33</b>	<b>F38</b>	<b>F39</b>	<b>F40</b>	<b>F41</b>	<b>F42</b>	<b>F43</b>	<b>F44</b>	<b>F45</b>
BRONZE METALLIC	PYRITE BRONZE	MEADOW GREEN	AQUA BLUE	BUBBLE PINK	ELECTRIC PURPLE	FAUX CHROME	FAUX GOLD	FAUX COPPER	COPPER METALLIC	
<b>7.</b>	<b>00</b>	<b>F04</b>	<b>F05</b>	<b>F15</b>	<b>F16</b>	<b>F18</b>	<b>F10</b>	<b>F11</b>	<b>F14</b>	<b>F38</b>
ACCENT <sup>1</sup> FINISH	SAME AS OUTSIDE	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	FIRE RED	CITRUS ORANGE	SUNSHINE YELLOW	MEADOW GREEN
	<b>F39</b>	<b>F40</b>	<b>F41</b>	<b>F42</b>	<b>F43</b>	<b>F44</b>	<b>RAL</b>			
	AQUA BLUE	BUBBLE PINK	ELECTRIC PURPLE	FAUX CHROME	FAUX GOLD	FAUX COPPER	CUSTOM (SPECIFY RAL)			
<b>8.</b>	---			<b>DIML</b>			<b>DIME</b>			
DIMMING	NONE			LED DIMMING (0 - 10V, CURRENT - SINKING)			LUTRON HI - LUMEN 1%			
<b>9.</b>	---					<b>EMR</b>				
EMERGENCY <sup>2</sup>	NONE					REMOTE				

1. REFLECTOR COLOR INSIDE  
2. 10W AT 90 MINUTES

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

## 350DI

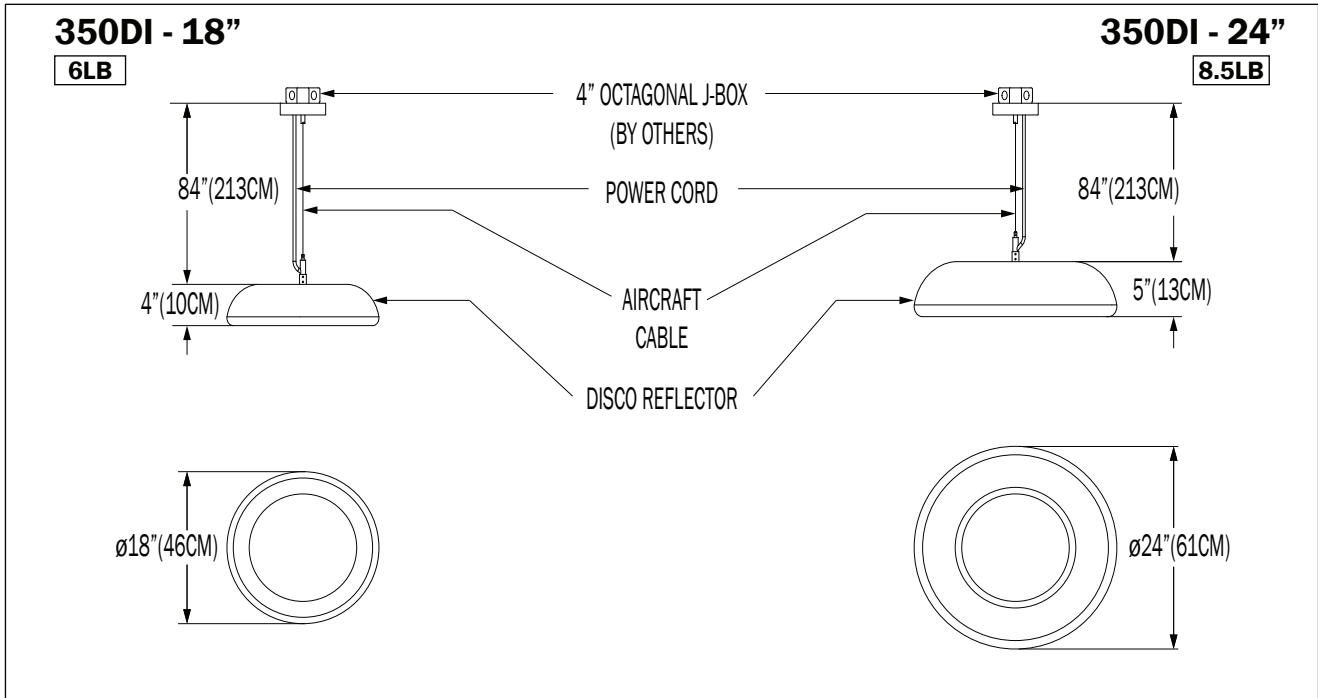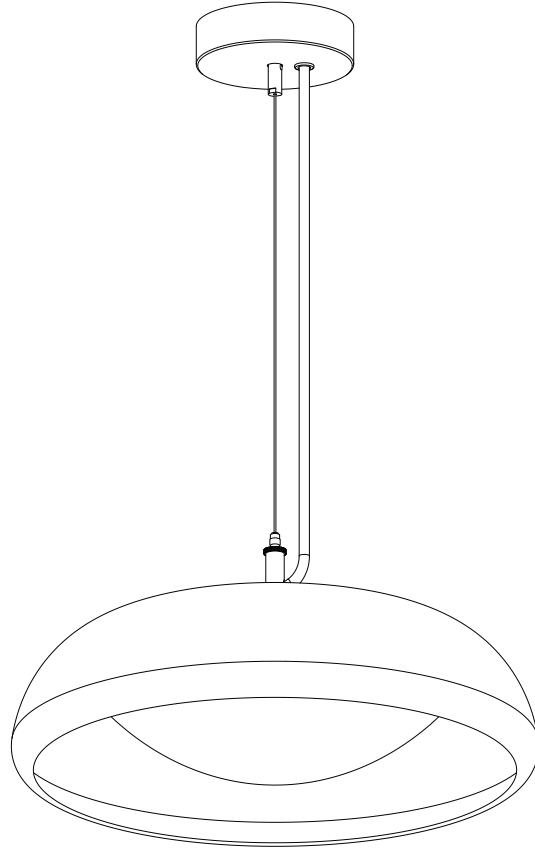

### CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


## DIRECT

PN	SIZE (DIA)	ILLUMINATION	LUMENS	WATTAGE
350DI	18	30LED	2622	30
	20	20LED	2556	20
	24	30LED	2657	30

### IES INDOOR REPORT

PHOTOMETRIC FILENAME : 350DI 18 30LED 35K F05

### POLAR GRAPH

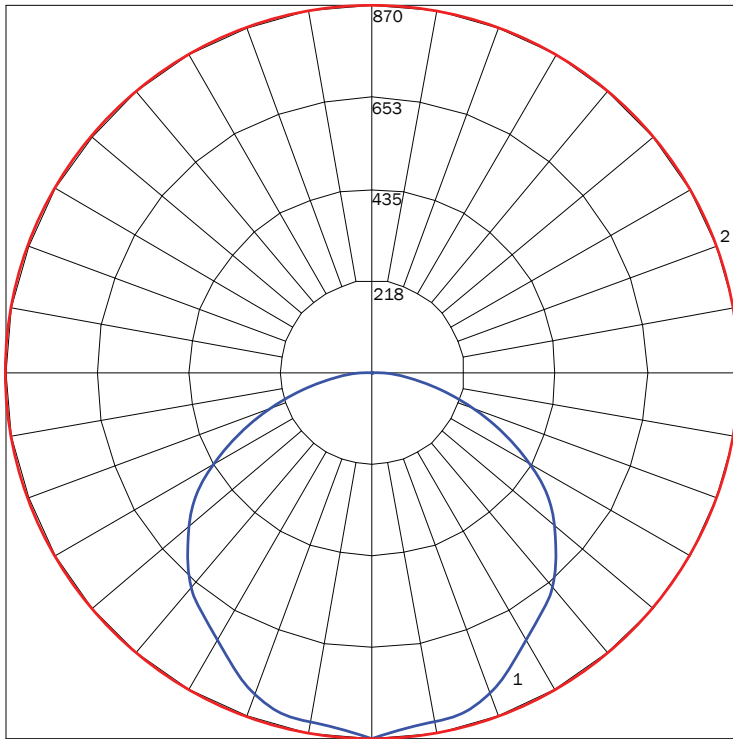


MAXIMUM CANDELA = 870.39 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0  
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)  
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

**LUMINAIRE LUMENS** 2622  
**TOTAL LUMINAIRE EFFICIENCY** 79%  
**LUMINAIRE EFFICACY RATING** 86  
**TOTAL LUMINAIRE WATTS** 31

### IES INDOOR REPORT

PHOTOMETRIC FILENAME : 350DI 24 30LED 35K F05

### POLAR GRAPH

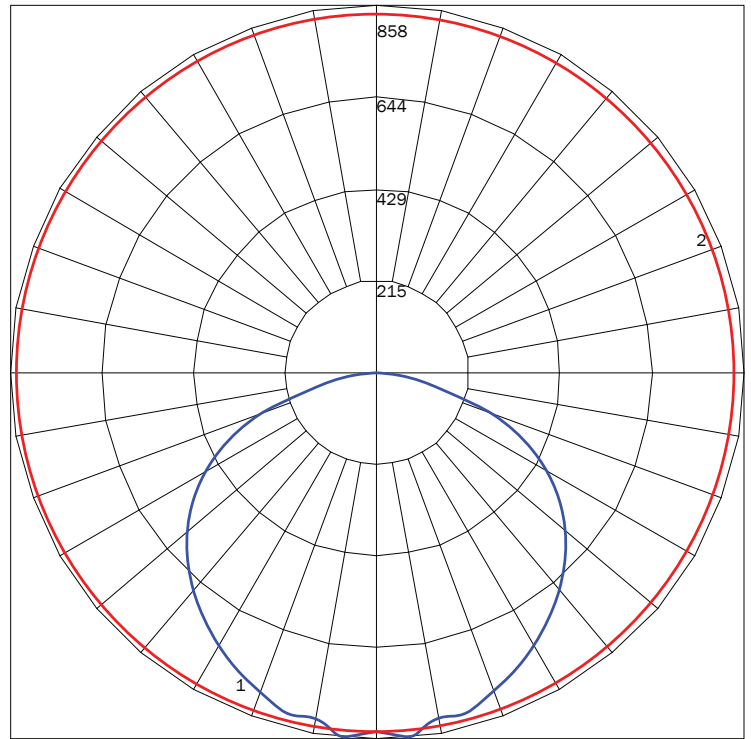

MAXIMUM CANDELA = 858.49 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 5  
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD.)  
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

**LUMINAIRE LUMENS** 2657  
**TOTAL LUMINAIRE EFFICIENCY** 80%  
**LUMINAIRE EFFICACY RATING** 87  
**TOTAL LUMINAIRE WATTS** 31

## FINISHES



## PREMIUM FINISHES



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.