

PROJECT: _____ TYPE: _____ QTY: _____



PRODUCT #	350DICL
APPLICATION	<ul style="list-style-type: none"> • CEILING MOUNT • INDOOR RATED
DIMENSIONS	<ul style="list-style-type: none"> • 24" (61CM)
ILLUMINATION	<ul style="list-style-type: none"> • DIRECT • LED 90 CRI • 2,025 - 2,653 LUMENS
DIFFUSERS	<ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC
ELECTRICAL	<ul style="list-style-type: none"> • 120 - 277V (347V CONSULT FACTORY)
MOUNTING	<ul style="list-style-type: none"> • CEILING, MOUNTED TO A 4" OCTAGONAL J-BOX
CONSTRUCTION	<ul style="list-style-type: none"> • ALUMINUM
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0-10V (1%) DIMMING (120 - 277V) • LINE VOLTAGE/TRIAC/ELV (120V ONLY) • LUTRON HI-LUME (1%) DIMMING (120 - 277V)
WEIGHT	<ul style="list-style-type: none"> • 11.5 LBS. MAXIMUM



DISCO™ CEILING

CONFIGURATOR



PROJECT: _____ TYPE: _____ QTY: _____

350D1CL - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9


1.	24							
DIAMETER	24" DIA. (61CM)							
2.	20LED				30LED			
ILLUMINATION	20W LED				30W LED			
3.	H	M	L	C: _____				
OUTPUT	100% LUMENS	75% LUMENS	50% LUMENS	[CUSTOM]% LUMENS				
4.	30K	35K	40K					
CCT	3000	3500	4000					
5.	120	277	UNI¹					
VOLTAGE ¹	120V	277V	120 - 277V					
6.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F16	F09	F31	F18
FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM
7.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F10	F14	RAL	F00
INTERIOR FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	FIRE RED	SUNSHINE YELLOW	CUSTOM (RAL#)	SAME AS OUTSIDE
8.	---	DIML	DIME	DIMV				
DIMMING	NONE	LED DIMMING (0 - 10V, CURRENT - SINKING)	LUTRON HI-LUME (1%) (120-277V)	LINE VOLTAGE/TRIAC/ELV (120V ONLY) (NOT COMPATIBLE WITH 277V AND UNI)				
9.	---	EMR						
EMERGENCY	NONE	REMOTE						

1: FOR THE 347V, PLEASE CONSULT FACTORY
NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

DIRECT LIGHTING

PN	ILLUMINATION	LUMENS	WATTAGE
350DICL	20LED	2025	20
	30LED	2657	30


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 350DICL 24 20LED F05.IES

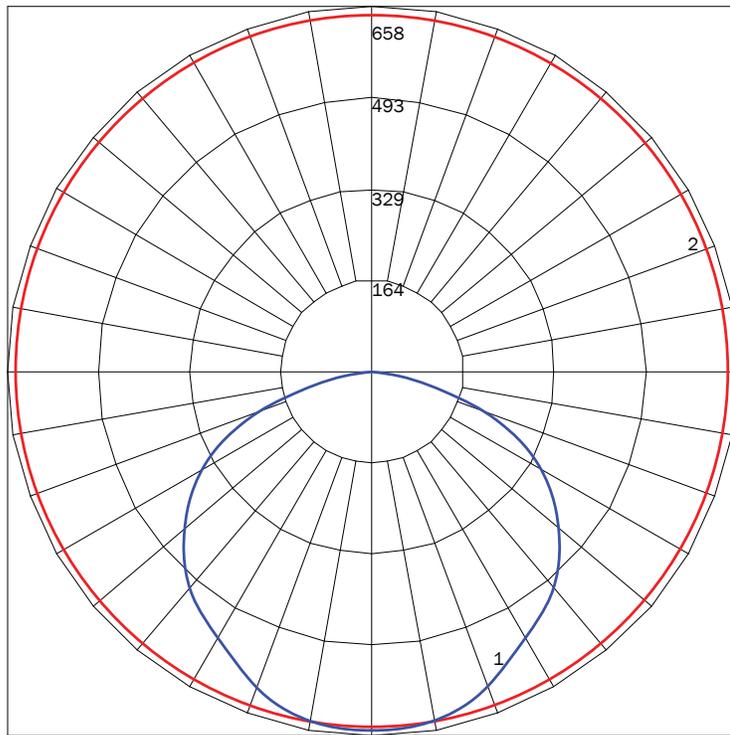

MAXIMUM CANDELA = 657.59 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	2025
TOTAL LUMINAIRE EFFICIENCY	79%
LUMINAIRE EFFICACY RATING	97
TOTAL LUMINAIRE WATTS	21

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 350DICL 24 30LED F05.IES

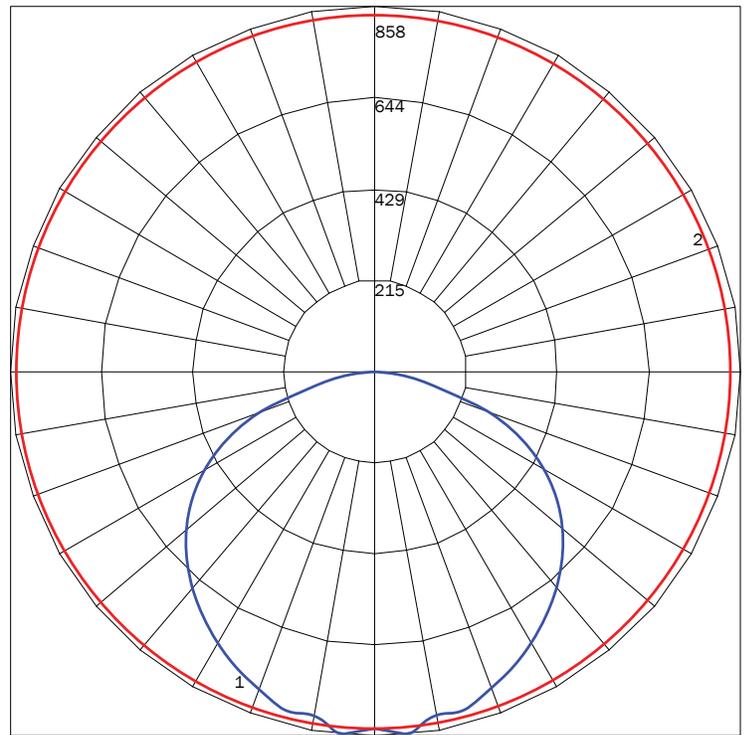

MAXIMUM CANDELA = 858.49 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	2657
TOTAL LUMINAIRE EFFICIENCY	80%
LUMINAIRE EFFICACY RATING	87
TOTAL LUMINAIRE WATTS	31

STANDARD PAINT FINISHES



PREMIUM PAINT FINISHES



INTERIOR PAINT FINISHES



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

