

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: EBB

APPLICATION	• PENDANT MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	• 15.5" (39CM)
ILLUMINATION	• DIRECT • LED 90CRI • 1,086 - 1,888 LUMENS
ELECTRICAL	• 120V, 277V AND 347V • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• CLEAR OR FROSTED, ELONGATED GLASS GLOBE • CLEAR, FLAT LENS
MOUNTING	• 120" MAX (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE • 1" TO 60" (2.5CM TO 152CM) STEM MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS SPECIALTY, AND POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 3 LBS MAXIMUM





EBB™ PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____

EBB 1 2 3 4 5 6 7 8 9 10 11 12

1.	I					O							
APPLICATION	INDOOR					OUTDOOR							
2.	15												
DIAMETER	15" DIA (38CM)												
3.													
ILLUMINATION ¹	100IN		15LED		16LED		19LED						
LED (W)	100W		15W		16W LED PAR38 E26 MED. BASE, 40° 1400 LUMENS (27/30/35/40/50K) REFER TO PAGE 6		19W						
LUMENS	----		1127				1888						
4.	CRD	C01	C06	C12	C18	C24	C36	C48	C60				
MOUNTING	120" DROP CORD	1" STEM MOUNT	6" STEM MOUNT	12" STEM MOUNT	18" STEM MOUNT	24" STEM MOUNT	36" STEM MOUNT	48" STEM MOUNT	60" STEM MOUNT				
5.	BC					WC							
CORD	BLACK DROP CORD					WHITE DROP CORD							
6.	----		30K		35K		40K						
LED CCT	NONE		3000		3500		4000						
7.	120			277			347						
VOLTAGE	120V			277V			347V						
8.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART			F04	F05	F15	F16	F09	F31	F18			
FINISH ²				MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM			
				F06	F07	F08	F10	F11	F13	F14	F21	F22	F23
				CLAY BROWN	ZEUS BROWN	MIDNIGHT BLUE	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUM
9.	---		G1		G2		G11		LNC				
GLOBE ³ / LENS	NONE		CLEAR, ELONGATED GLOBE		FROSTED GLOBE		CLEAR, ELONGATED GLOBE WITH CAST GUARD		CLEAN LENS				
10.	---					DIML							
DIMMING ⁴	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)							
11.	----		EM		EMC		EMR		EMCR				
EMERGENCY ⁵	NONE		INTEGRAL		INTEGRAL COLD PACK		REMOTE		REMOTE COLD PACK				
12.	----			ACC			BL						
MOUNTING ⁶ ACCESSORIES	NONE			AIRCRAFT CABLE FOR DROP CORDS			CEILING SLOPE ADAPTER FOR STEM MOUNTING (30°)						


1. INCANDESCENT AND 16W LED PAR LAMP USES A MEDIUM BASE SOCKET (E26)
2. A CLEAR COAT IS APPLIED TO COPPER. PATINA WILL FORM OVER TIME
3. GLOBES ARE NOT AVAILABLE WITH THE 17W LED PAR 38 LAMPS
4. DIMMING IS NOT AVAILABLE FOR OUTDOOR CF APPLICATIONS
5. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS
6. MAY REQUIRE TO COMPLY WITH LOCAL SEISMIC/EARTHQUAKE CODE

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. **ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.** CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING




DROP CORD MOUNT

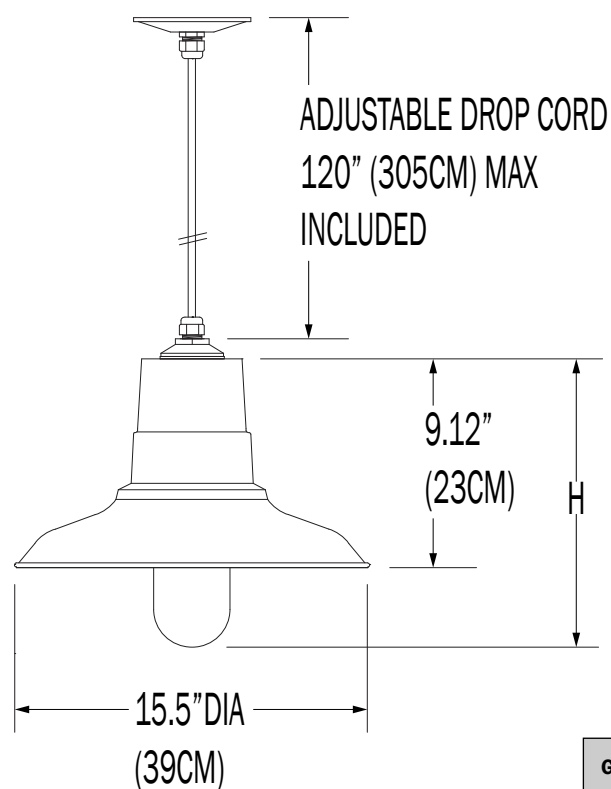

GLOBE	HEIGHT (H)
G1	9.6" (24CM)
G2	9.6" (24CM)
G11	12.85" (33CM)

STEM MOUNT

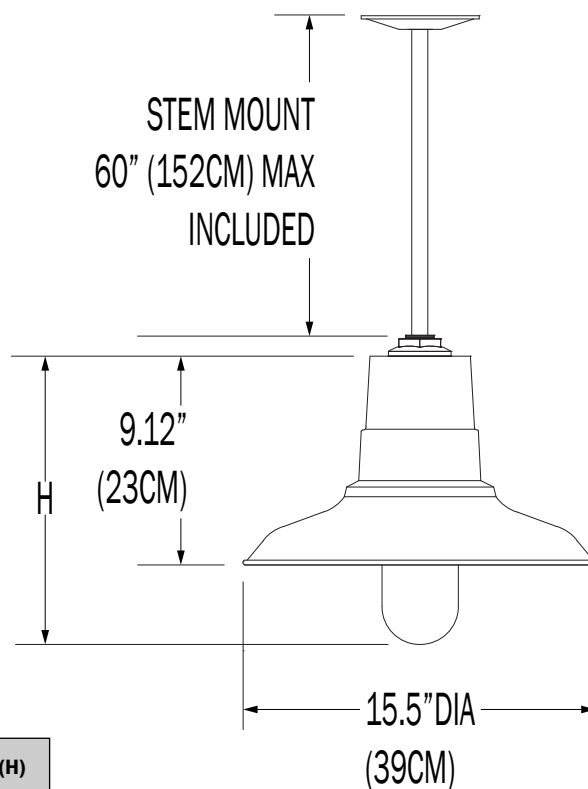

CUSTOM


NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

DIRECT

PN	ILLUMINATION	GLOBE/LENS	LUMENS	WATTAGE
EBB	15LED	LNC	1086	15
		---	1127	15
	19LED	LNC	1735	19
		---	1888	19

IES INDOOR REPORT
PHOTOMETRIC FILENAME : EBB 15 15LED LNS

POLAR GRAPH

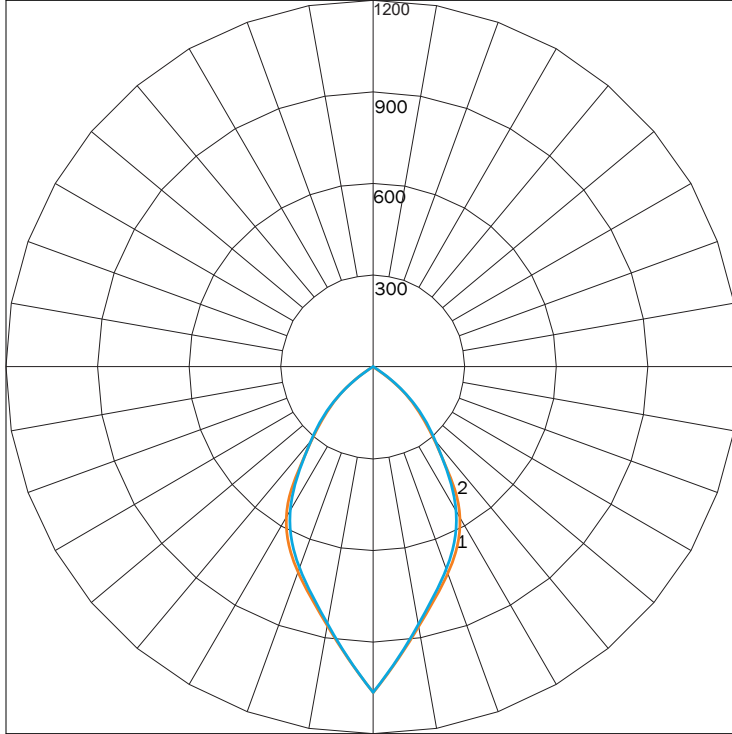


MAXIMUM CANDELA = 1019.78 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

1086
 NA
 63
 17

IES INDOOR REPORT
PHOTOMETRIC FILENAME : EBB 15 19LED

POLAR GRAPH

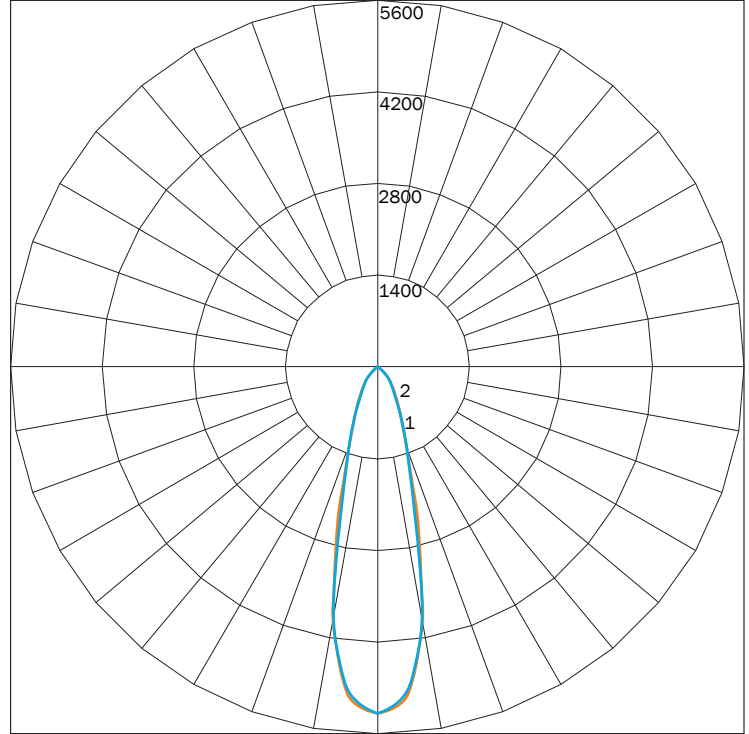


MAXIMUM CANDELA = 5198.16 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

1888
 NA
 88
 22

FINISHES

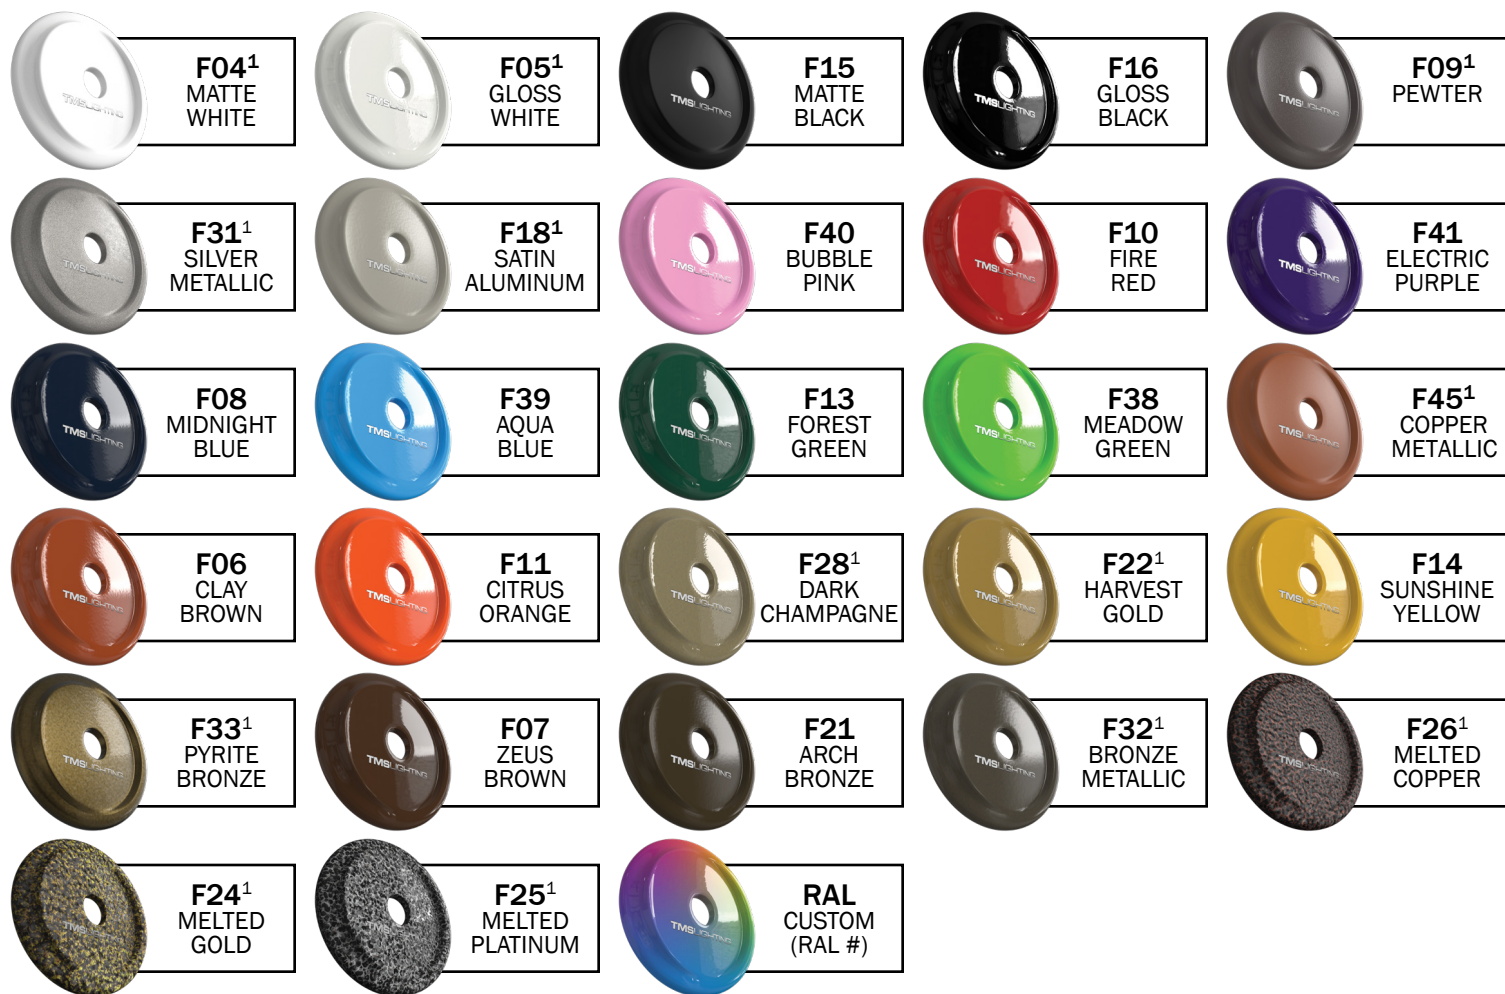

PREMIUM FINISHES



PREMIUM MATERIALS



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.

16W LED PAR 38 40° MED BASE

HD-PAR/I90/5CCT



FEATURES & BENEFITS

5 FIELD SELECTABLE CCT'S (27/30/35/40/50K)

HIGH CRI (90+)


GLASS LENS

25,000 HRS AVERAGE LIFE

WET LOCATION RATED

DIMMABLE

DIMENSIONAL DRAWING

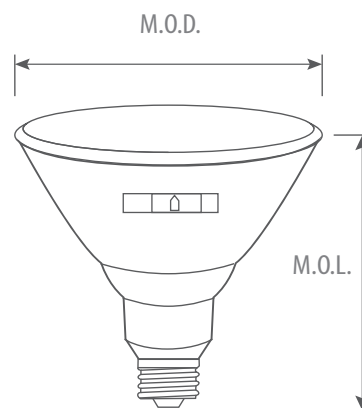

MODEL NUMBER	WATTAGE (W)	BASE	VOLTAGE (V)	HOUR RATING	BEAM ANGLE	INITIAL LUMENS(LM)	CCT(K)	CRI	ENCLOSED FIXTURE APPLICATION	WET LOCATION	M.O.D. (INCH)	M.O.L. (INCH)
16W LED	16	E26	120	25,000	40°	1400	27/30/35/40/50	90	NO	YES	4.8	5.31

