

EMBRACE™ PENDANT

PROJECT: _____



TYPE: _____

QUANTITY: _____



PN: 6050

ILLUMINATION	<ul style="list-style-type: none"> • 5,932 - 23,095 LUMENS • DIFFUSE • LED 90CRI
APPLICATION	<ul style="list-style-type: none"> • PENDANT MOUNT • RATED: INDOOR
DIMENSION	<ul style="list-style-type: none"> • 24", 36", 48", 60", 72" DIA. (61cm, 91cm, 122cm, 152cm, and 183cm) • PROFILE: 4.31"W X 6.375"H (11cm X 16.2cm)
ELECTRICAL	<ul style="list-style-type: none"> • 120 - 277V • 10KV SURGE SUPPRESSION
DIFFUSERS	<ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none"> • 120" (305cm) BLACK OR WHITE DROP CORD WITH AC CABLES • 120" POWER OVER SUSPENSION
LED DRIVER	<ul style="list-style-type: none"> • CANOPY OR REMOTE MOUNT
CONSTRUCTION	<ul style="list-style-type: none"> • ALUMINUM
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0 - 10V (1%) DIMMING (120-277V) • LINE VOLTAGE/TRIAC/ELV (120V ONLY) • LUTRON HI-LUME (1%) DIMMING (120-277V)
WEIGHT	<ul style="list-style-type: none"> • 25 LBS MINIMUM, 60 LBS MAXIMUM

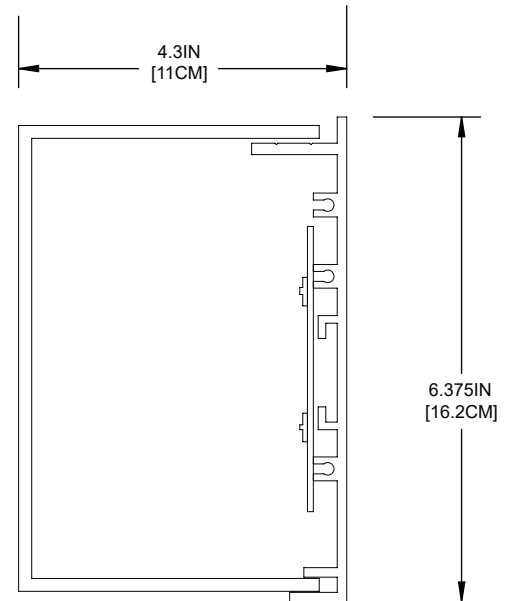

DIFFUSE



EMBRACE™ PENDANT



PROJECT: _____

TYPE: _____

QUANTITY: _____

6050

1 2 3 4 5 6 7

1.	24	36	48	60	72
DIAMETER	24" DIA. (61CM)	36" DIA. (91CM)	48" DIA. (122CM)	60" DIA. (152CM)	72" DIA. (183CM)
LED (W)	60W	105W	152W	186W	238W
LUMENS	5932	10248	14854	18440	23095

2.	H	M	L	C: _____
OUTPUT	100% LUMENS	75% LUMENS	50% LUMENS	[CUSTOM]% LUMENS

3.	30K	35K	40K
LED CCT	3000	3500	4000

4.	MMCD	MMRM
MOUNTING	MULTIPLE CABLES WITH CANOPY DRIVER	MULTIPLE CABLES WITH REMOTE DRIVER


5.	BC	WC	POS
CORD	BLACK DROP CORD WITH AIRCRAFT CABLES	WHITE DROP CORD WITH AIRCRAFT CABLES	POWER OVER SUSPENSION (SILVER ONLY) <small>(UP TO 36" ONLY) (NOT APPLICABLE FOR MMCD COMBINATION)</small>

6.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F16	F09	F31	F18
FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM

7.	DIML	DIME	DIMV
DIMMING	0-10V (1%) (120-277V)	LUTRON HI-LUME (1%) (120-277V) <small>(UP TO 60" ONLY)</small>	LINE VOLTAGE/TRIAC/ELV (120V ONLY)

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.



EMBRACE™ PENDANT

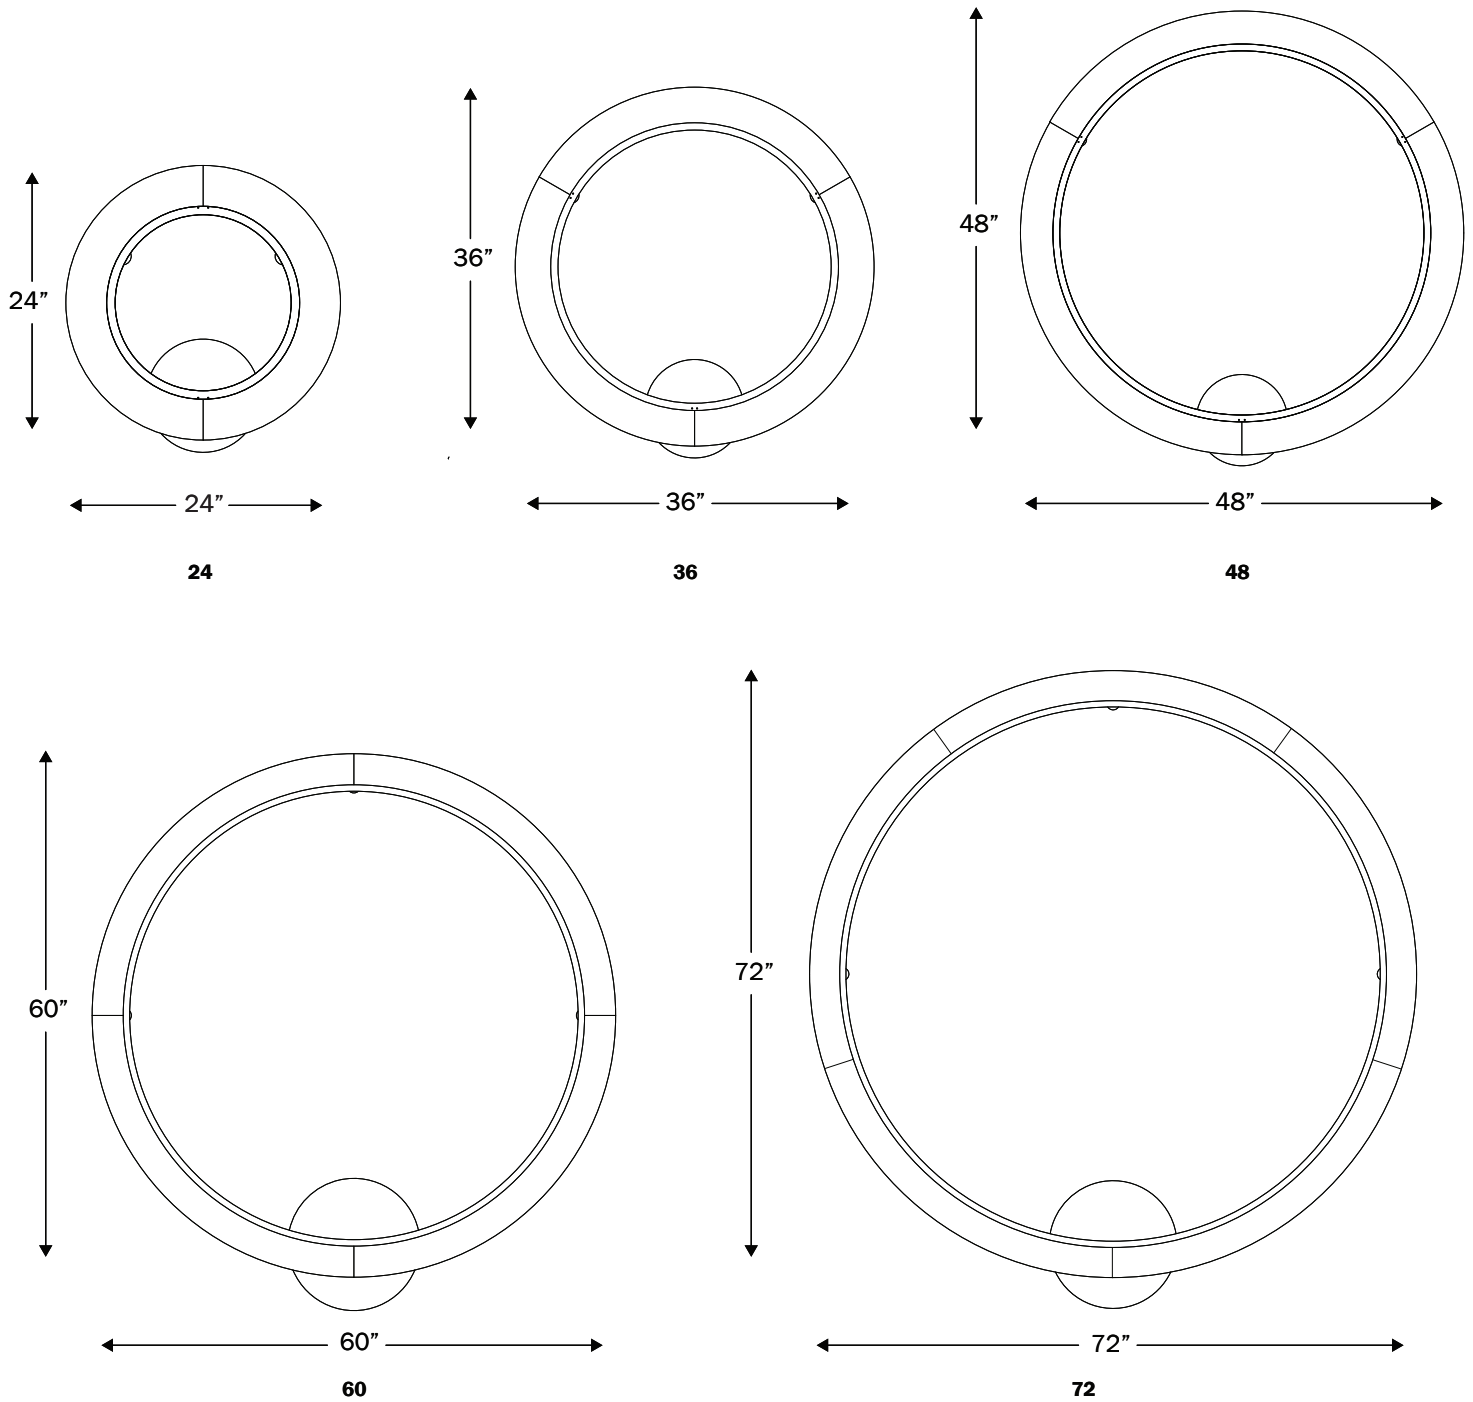

SIZES	DIAMETER	MOUNTING POINT	CANOPY SIZE	NUMBER OF DROP CORDS	WEIGHT (POUNDS - LBS)	SECTIONS
			MMCD			
24	24"	3	10"	1	25	1
36	36"	3	10"	1	30	1
48	48"	3	10"	1	40	1
60	60"	4	15"	1	50	1
72	72"	5	15"	2	60	1



POS (POWER OVER SUSPENSION)

MMRM COMBINATION (MULTIPLE CABLES, REMOTE MOUNT DRIVER)


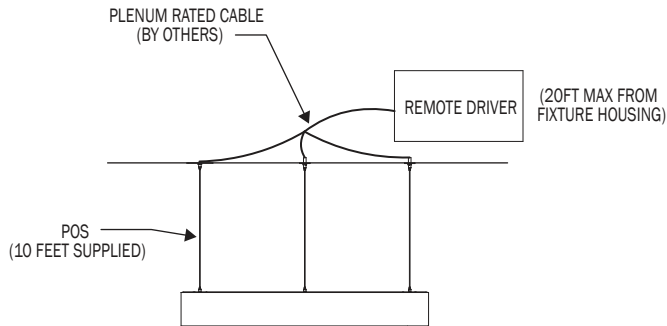


DROP CORD

MMCD COMBINATION (MULTIPLE CABLES, CANOPY MOUNT DRIVER)

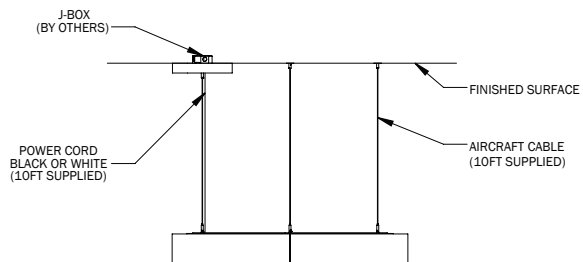

MMRM COMBINATION (MULTIPLE CABLES, REMOTE MOUNT DRIVER)

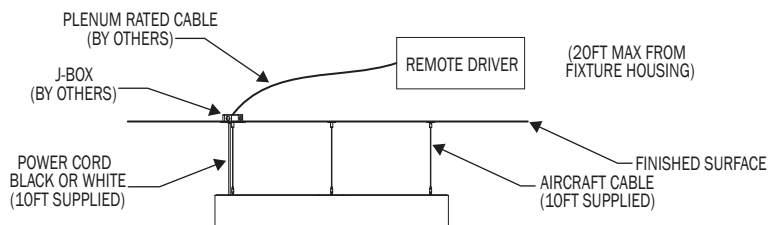


DIFFUSE

PN	SIZE (DIA)	LUMENS	WATTAGE
6050	24	5932	60
	36	10248	105
	48	14854	152
	60	18440	186
	72	23095	238

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6050 24 ID 35K F05.IES

POLAR GRAPH

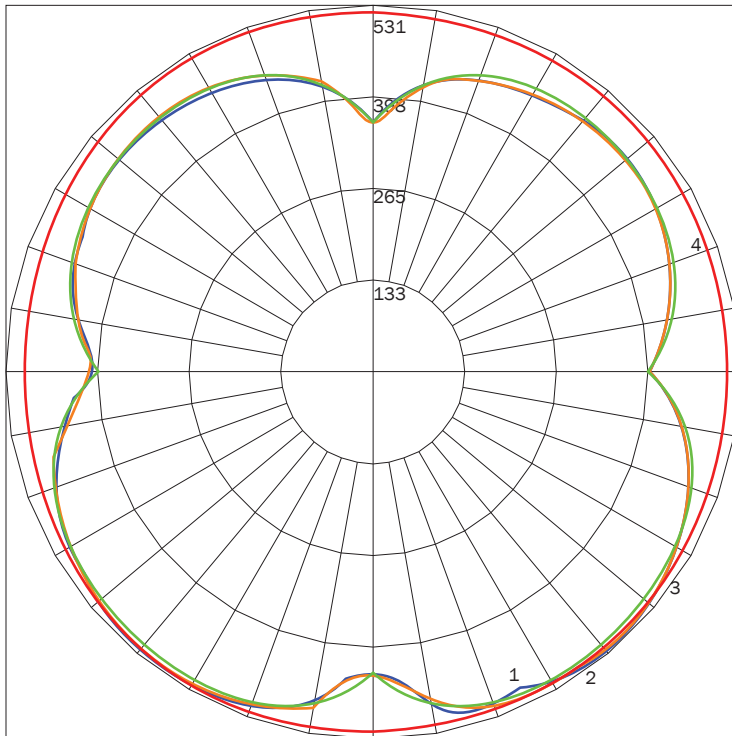


MAXIMUM CANDELA = 530.8 LOCATED AT HORIZONTAL ANGLE = 45, VERTICAL ANGLE = 45
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (45 - 225) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (45 - 225)
 # 3 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 4 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (45) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 5932
TOTAL LUMINAIRE EFFICIENCY 89%
LUMINAIRE EFFICACY RATING 99
TOTAL LUMINAIRE WATTS 60

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6050 72 ID 35K F05.IES

POLAR GRAPH

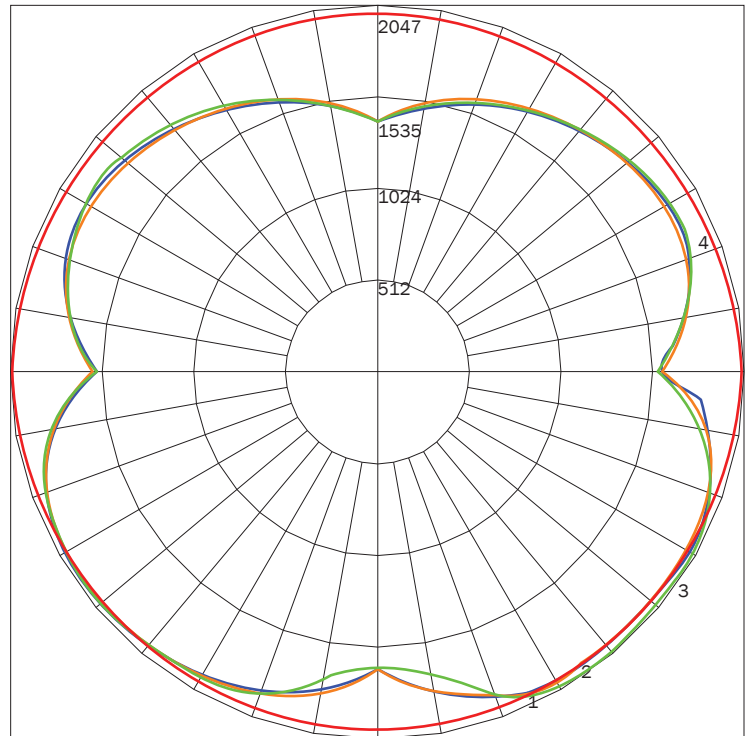

MAXIMUM CANDELA = 2047.29 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 55
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (45 - 225)
 # 3 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 4 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (55) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 23095
TOTAL LUMINAIRE EFFICIENCY 87%
LUMINAIRE EFFICACY RATING 97
TOTAL LUMINAIRE WATTS 238

EMBRACE™ PENDANT

FINISHES



PREMIUM FINISHES



NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.