

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: EZ160

APPLICATION	<ul style="list-style-type: none"> • WALL MOUNT • INDOOR RATED • ADA COMPLIANT
DIMENSION	<ul style="list-style-type: none"> • 8.5"W X 16.5"H (22CM X 42CM) • DEPTH: 4" (10CM)
ILLUMINATION	<ul style="list-style-type: none"> • DIFFUSE • LED 90CRI • 703 - 841 LUMENS
ELECTRICAL	<ul style="list-style-type: none"> • 120V, 277V AND 347V • 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none"> • WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	<ul style="list-style-type: none"> • STEEL
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SEVERAL TMS PLATED, AND POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0 - 10V STANDARD DIMMING
WEIGHT	<ul style="list-style-type: none"> • 10LBS MAXIMUM



DIFFUSE



PROJECT: _____

TYPE: _____

QUANTITY: _____


EZ160

1 2 3 4 5 6 7



1.	ILLUMINATION									
	21LED									
	LED (W)	21W								
LUMENS	841									
2.	30K			35K			40K			
	LED CCT	3000		3500			4000			
3.	120			277			347			
	VOLTAGE	120V		277V			347V			
4.	SN	CH	BC	AC	AB	SB	PB	F05	F09	F15
	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUÉ COPPER	ANTIQUÉ BRASS	SATIN BRASS	POLISHED BRASS	WHITE	PEWTER	MATTE BLACK
	F16	F18	F19	F24	F25	F26	F31	F33	RAL	
FINISH	GLOSS BLACK	SATIN ALUMINUM	MIRROR SILVER	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)	
5.	OP									
	DIFFUSER	OPAL - WHITE ACRYLIC								
6.	---					DIML				
	DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT-SINKING)			
7.	---					EMR				
	EMERGENCY ¹	NONE					REMOTE			

1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277 SYSTEMS



TOP/BOTTOM

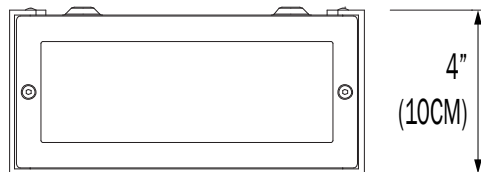

FRONT

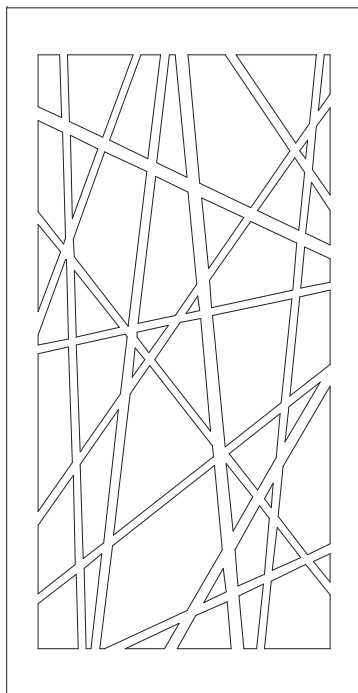

PROFILE

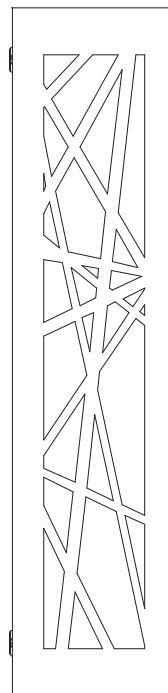

16.5"
(42CM)


DIFFUSE

PN	ILLUMINATION	DIFFUSER	FINISH	LUMENS	WATTAGE
EZ160	21LED	OP	F16	703	21
			SN	841	21

IES INDOOR REPORT

PHOTOMETRIC FILENAME : EZ160 21LED F16.IES

POLAR GRAPH

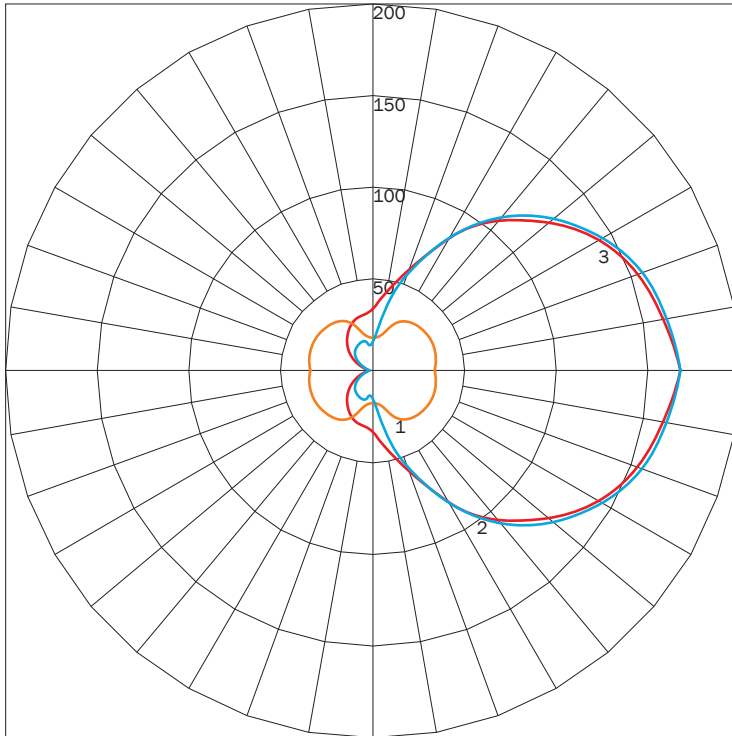

MAXIMUM CANDELA = 167.72 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS

703

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

35


TOTAL LUMINAIRE WATTS

20

IES INDOOR REPORT

PHOTOMETRIC FILENAME : EZ160 21LED SN.IES

POLAR GRAPH

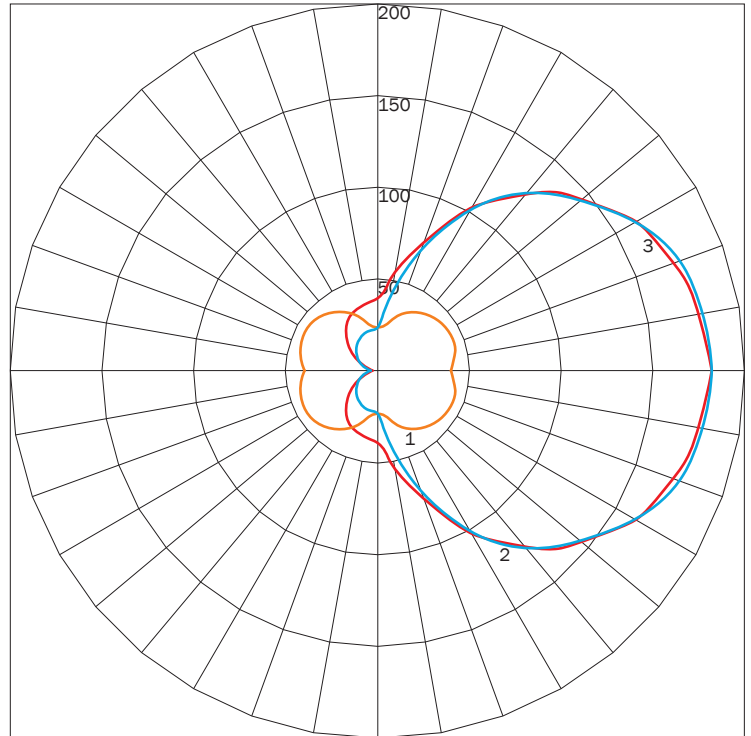

MAXIMUM CANDELA = 184.35 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 80
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS

841

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

41

TOTAL LUMINAIRE WATTS

20

AVAILABLE FINISHES



SN
SATIN
NICKEL



CH
CHROME



BC
BLACK
CHROME



AC
ANTIQU
COPPER



AB
ANTIQU
BRASS



SB
SATIN
BRASS



PB
POLISH
ED BRASS



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F19
MIRROR
SILVER



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.