## FARM LIGHT<sup>™</sup> WALL

PROJECT: \_\_\_\_

#### TYPE:

QUANTITY: \_\_



### PN: 10W

APPLICATION	WALL MOUNT     INDOOR OR OUTDOOR RATED
DIMENSION	• 12"DIA (30CM)
ILLUMINATION	<ul> <li>DIRECT</li> <li>LED 90CRI</li> <li>INCANDESCENT MEDIUM BASE SOCKET</li> <li>753 - 1602 LUMENS</li> </ul>
ELECTRICAL	<ul><li>120V, 277V AND 347V</li><li>10kA SURGE SUPRESSION STANDARD</li></ul>
DRIVER	<ul><li>WALL MOUNT (INTEGRAL)</li><li>REMOTE MOUNT (INDOOR OR OUTDOOR)</li></ul>
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	ALUMINUM
FINISHES	<ul> <li>AVAILABLE ANODIZED, BRUSHED, AND IN SEVERAL TMS POWDER COATED FINISHES</li> <li>CUSTOM RAL FINISHES AVAILABLE</li> </ul>
DIMMING	0 - 10V STANDARD DIMMING
WEIGHT	• 2.5 LBS MAXIMUM





## TMSLIGHTING



## FARM LIGHT<sup>™</sup> WALL

PROJECT: \_\_\_\_\_

TYPE:

QUANTITY: \_\_\_\_\_

## **10W** -....-1 2 3 4 5 6 7 8 9

I				0						
INDOOR				OUTDOOR						
ILLUMINATION										
150IN						15	.ED			
150W				15W						
2240				1090						
Зок				35К 40К						
NONE			3000K	3000K		3500K			4000K	
	120		2	277 347						
	120V 277V 347V									
			WM		N1			N4		
	NONE				REMOTE INDOOR MOUNT (NEMA 1)		REMOTE OUTDOOR MOUNT (NEMA 4)			
F04	F05	F15	F16	F09	F31	F18	F	)6	F07	F08
MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC		JM BRC		ZEUS BROWN	MIDNIGHT BLUE
F10	F11	F13	F14	F21	F22	F24	F	25	F26	F28
FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD				MELTED COPPER	DARK CAMPAGNE
F32	F33	F38	F39	F40	F41	F42	F4	13	F44	F45
BRONZE METALLIC	PYRITE BRONZE	MEADOW GREEN	AQUA BLUE	BUBBLE PINK	ELECTRIC PURPLE				FAUX COPPER	COPPER METALLIC
RAL	BR	AN								
CUSTOM SPECIFY RAL)	BRUSHED ALUMINUM	ANODIZED								
				DIML						
NONE				LED DIMMING (0 - 10V, CURRENT - SINKING)						
EM EN			AC EMR EMCR				ICR			
<sup>2</sup> NONE INTEGRAL										
NONE				12" WIRE GUARD						
DE	MATTE WHITE F10 FIRE RED F32 BRONZE METALLIC RAL CUSTOM SPECIFY RAL)	120         120V         120V         120V         NONE         NONE         F04       F05         MATTE       GLOSS         WHITE       SUSS         F10       F11         F12       GRANGE         F32       F33         BRONZE       PYRITE         METALLIC       BRONZE         RAL       BR         CUSTOM       BRUSHED         SPECIFY RAL)       BRUSHED         INONE	150IN         150W         150W         2240         120         120         120V         MATTE         MATTE         MATTE         MATTE         MATTE         MATTE         MATTE         MATTE         MATTE         BRONZE       PYRITE	150IN         150W         2240         30K         NONE         120         120V         120V         120V         120V         120V         VMM         NONE         VMM         NONE         VMM         NONE         VMM         MATTE         MATTE         MATTE         MATTE         MATTE         VMM         MATTE         MATTE         MATTE         MATTE         MATTE         VMM         MATTE         MATTE         MATTE         MATTE         METALLIC         BRONZE         METALLIC         SPECIFY RAL          INTEGRAL	ILLUMI           ISOIN           150W           2240           30K           2000K           2240           30K           NONE         3000K           120         22           120V         22           NONE         %           MAITTE         GLOSS         PEWTER           MAITTE         GLOSS         SUNSHINE         ARCH.         PS <th< td=""><td>ILLUMINATION           ILLUMINATION           ILLUMINATION           ISON           ISON      <t< td=""><td>ILLUMINATION           ILLUMINATION           </td></t<></td></th<>	ILLUMINATION           ILLUMINATION           ILLUMINATION           ISON           ISON <t< td=""><td>ILLUMINATION           ILLUMINATION           </td></t<>	ILLUMINATION           ILLUMINATION			

2. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

**TMS**LIGHTING

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.




### TMSLIGHTING



CUSTOM NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: https://tmsilghting.com/sales.agents.html

3.36" (8.5CM)

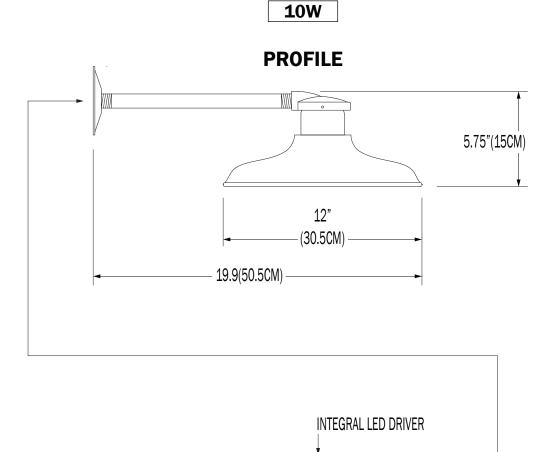

7.5"(19CM)

# FARM LIGHT<sup>TM</sup> WALL

# FARM LIGHT<sup>TM</sup> WALL


### DIRECT

PN	ILLUMINATION	LUMENS	WATTAGE
1014	15LED	1090	15
10W	150IN	2240	150

#### IES INDOOR REPORT PHOTOMETRIC FILENAME : 10W 15LED F05.IES

PHOTOWIETRIC FILENAIVIE: 10W 15LED F05.IES

#### POLAR GRAPH

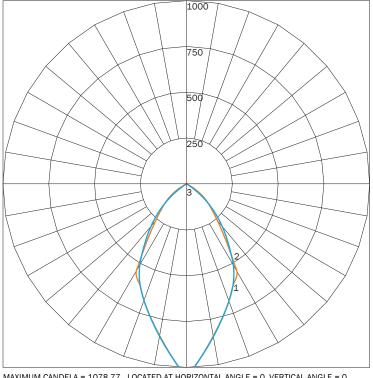


MAXIMUM CANDELA = 1078.77 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS	1090
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	64
TOTAL LUMINAIRE WATTS	17

#### IES INDOOR REPORT PHOTOMETRIC FILENAME : 10W 150IN.IES

#### POLAR GRAPH

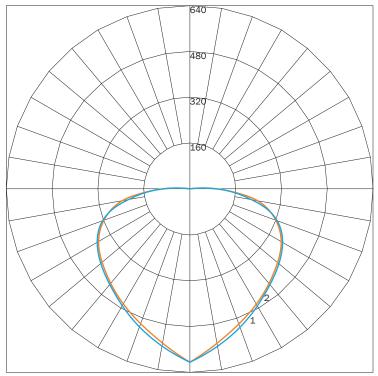

MAXIMUM CANDELA = 613.755 LOCATED AT HORIZONTAL ANGLE = 45, VERTICAL ANGLE = 5 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	2240
TOTAL LUMINAIRE EFFICIENCY	84%
LUMINAIRE EFFICACY RATING	15
TOTAL LUMINAIRE WATTS	150

## TMSLIGHTING



## TMSLIGHTING

content of the second s

FINISHES ARE SUBJECT TO AVAILABLILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP. DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE. MATTE FINISHES AVAILABLE. CONSULT FACTORY.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.



### PREMIUM MATERIALS



### PREMIUM FINISHES

FINISHES



# FARM LIGHT<sup>™</sup> WALL