PROJECT:	
TYPE:	
OLIANITITY.	



PN: 505FIC

APPLICATION	PENDANT MOUNTINDOOR
DIMENSION	 24", AND 48" (61CM, AND 122CM) PROFILE: 1"W X 1.75"H (2.54CM X 4.4CM)
ILLUMINATION	DIRECTLED 90CRI1,954 - 3,483 LUMENS
DRIVER	 CANOPY OR REMOTE MOUNT 120V, 277V, AND UNI (120 - 277V) 10kA SURGE SUPRESSION STANDARD
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	 96" (244CM) POWER OVER SUSPENSION W/ AIRCRAFT CABLES
CONSTRUCTION	• ALUMINUM
FINISHES	 AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 7.5 LBS MAXIMUM





PROJECT:	
TYPE:	
QUANTITY:	

505FIC								_
	1	2	3	4	5	6	7	8

1.	24D	48D
DIA	24"DIA. (61CM)	48"DIA. (122CM)
LED (W)	26W	47W
LUMENS	1954	3483

2.	н	М	L	C1
OUTPUT	100% LUMEN OUTPUT	75% LUMEN OUTPUT	50% LUMEN OUTPUT	[CUSTOM] % LUMEN OUTPUT

LED CCT	3000	3500	4000
4.	120	277	UNI
VOLTAGE	120V	277V	120 - 277V

5.	POS
MOUNTING	POWER OVER SUSPENSION W/ AIRCRAFT CABLES


DRIVER		CANOPY MOUNT						REMOTE MOUNT	Γ	
7.	F04	F05	F09	F15	F16	F18	F21	F31	F33	RAL
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)

8.	NONE	DIML
DIMMING		LED DIMMING (0 - 10V, CURRENT - SINKING)


^{1.} CUSTOM PERCENTAGE I.E. 60%. CONSULT FACTORY.

505FIC

RM - REMOTE MOUNT

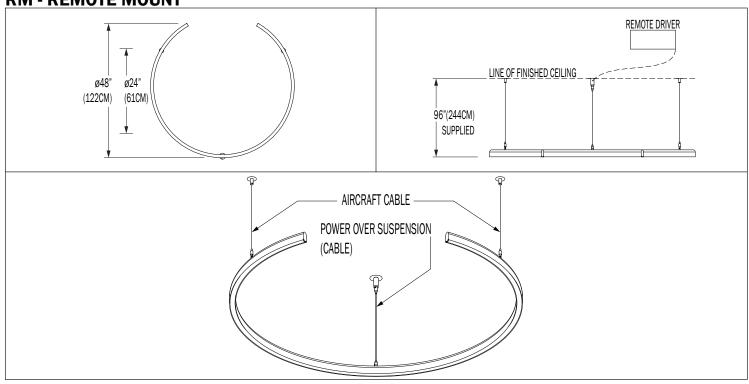

CD - CANOPY MOUNT

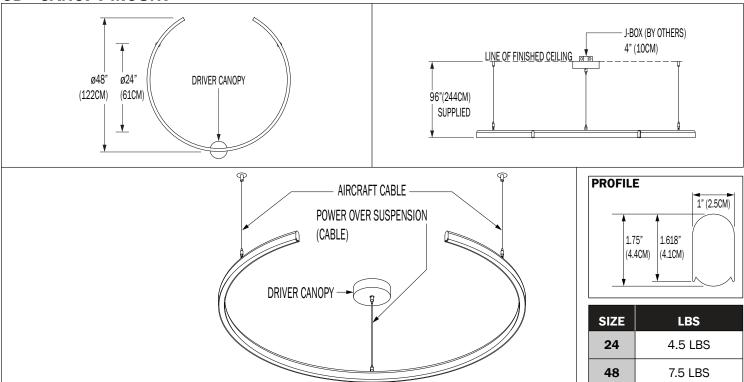

DIRECT

PN	I SIZE (DIA) LUMENS		WATTAGE
505FIC	24D	1954	26
SUSFIC	48D	3483	47


IES INDOOR REPORT

PHOTOMETRIC FILENAME: 505FIC 24D 35K F05.IES

IES INDOOR REPORT

PHOTOMETRIC FILENAME: 505FIC 48D 35K F05.IES


POLAR GRAPH

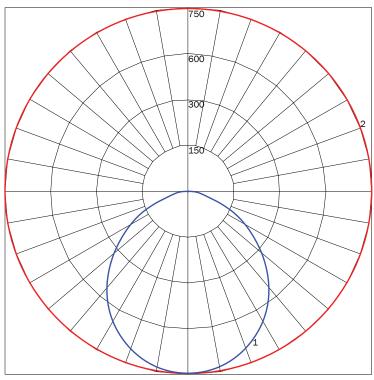

MAXIMUM CANDELA = 773 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.) # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

POLAR GRAPH

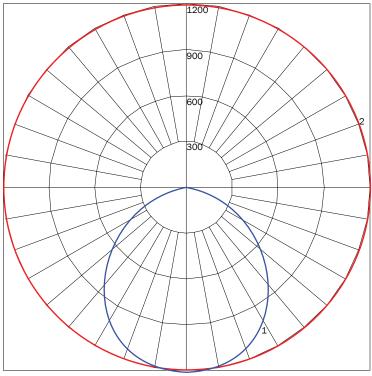

MAXIMUM CANDELA = 1342 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 45 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (45 - 225) (THROUGH MAX. CD.) # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (25) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	3483
TOTAL LUMINAIRE EFFICIENCY	100%
LUMINAIRE EFFICACY RATING	74
TOTAL LUMINAIRE WATTS	47

AVAILABLE FINISHES



F04 MATTE WHITE



F05 GLOSS WHITE



F09 PEWTER



F15 MATTE BLACK



F16 GLOSS BLACK



F18 SATIN ALUMINUM



F21 ARCH BRONZE



F31 SILVER METALLIC



F33 PYRITE BRONZE

