


FIBONACCI CTM PENDANT

PROJECT: _____

TYPE: _____


QUANTITY: _____

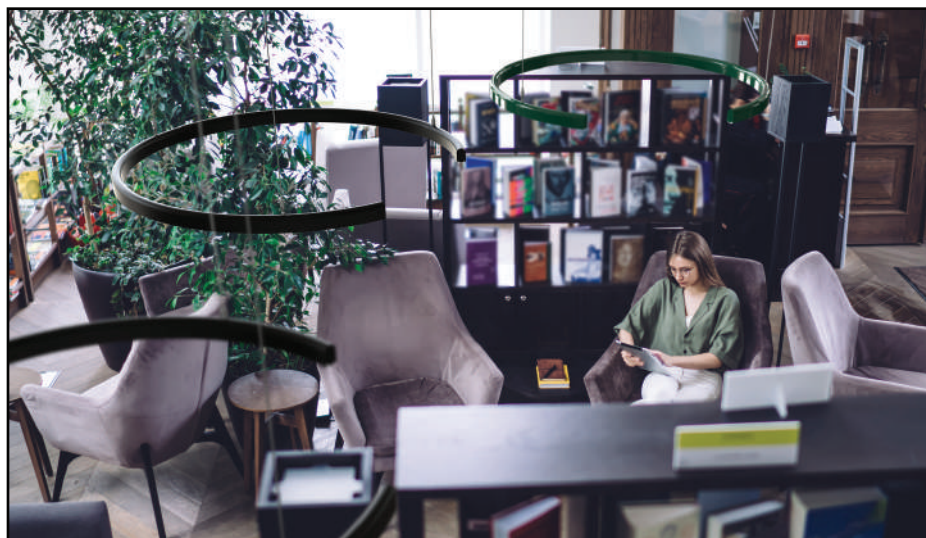


PN: 505FIC

ILLUMINATION	• 1,954 - 3,483 LUMENS • DIRECT • LED 90CRI
APPLICATION	• DIRECT PENDANT MOUNT • INDOOR RATED
DIMENSION	• 24" and 48" DIA. (61cm, 91cm, 122cm) • PROFILE: 1"W X 1.75"H (2.5cm X 4.4cm)
ELECTRICAL	• 120 - 277V • 10KV SURGE SUPPRESSION
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• 120" POWER OVER SUSPENSION
LED DRIVER	• CANOPY OR REMOTE MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V (1%) DIMMING (120-277V) • LINE VOLTAGE/TRIAC/ELV (120V ONLY) • LUTRON HI-LUME (1%) DIMMING (120-277V)
WEIGHT	• 4.5 LBS MINIMUM, 7.5 LBS MAXIMUM

FLAT DIFFUSER



DOM DIFFUSER




DIRECT

TMSLIGHTING

INDOOR



FIBONACCI C™ PENDANT

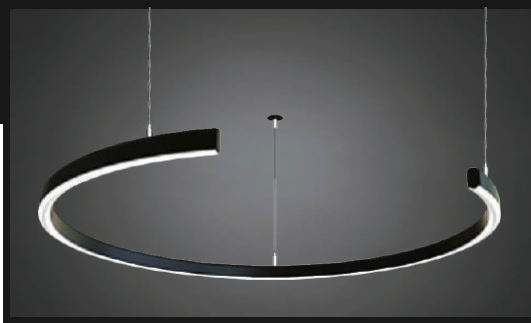

PROJECT: _____

TYPE: _____

QUANTITY: _____

505FIC

1 2 3 4 5 6 7 8

1.	24D	48D
DIA	24"DIA. (61CM)	48"DIA. (122CM)
LED (W)	26W	47W
LUMENS	1954	3483

2.	H	M	L	C: _____
OUTPUT	100% LUMENS	75% LUMENS	50% LUMENS	[CUSTOM]% LUMENS

3.	30K	35K	40K
CCT	3000	3500	4000

4.	MMCD	MMRM
MOUNTING	MULTIPLE CABLES AND CANOPY DRIVER	MULTIPLE CABLES AND REMOTE DRIVER

5.	POS
CORD	POWER OVER SUSPENSION (SILVER ONLY)

6.	FLAT	DOM
DIFFUSER	FLAT DIFFUSER	DOME DIFFUSER

7.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F16	F09	F31	F18
FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM


8.	DIML	DIME	DIMV
DIMMING	0-10V (1%) (120-277V)	LUTRON HI-LUME (1%) (120-277V)	LINE VOLTAGE/TRIAC/ELV (120V ONLY)

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING




FIBONACCI C™ PENDANT

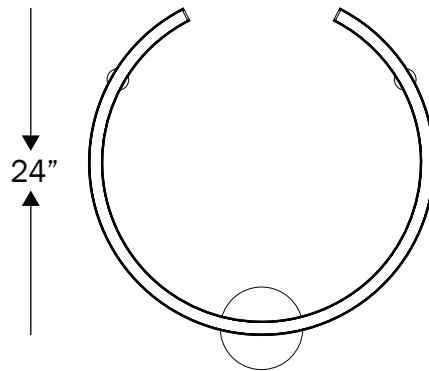

24"

24D

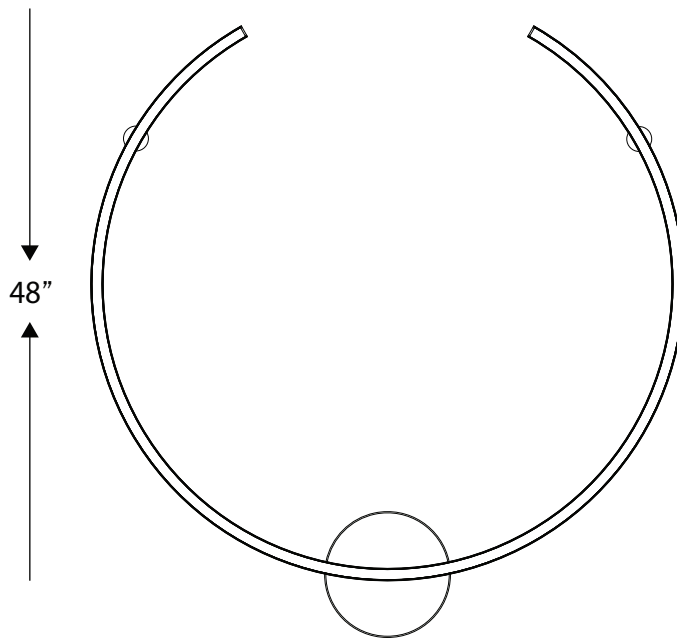



48"

48D



SIZE	DIAMETER	MOUNTING POINT	CANOPY SIZE	NUMBER OF CANOPY	WEIGHT (POUNDS - LBS)	SECTIONS
24"	24"	3	5.72"	1	4.5	1
48"	47.5"	3	10"	1	7.5	1

POS (POWER OVER SUSPENSION)

MMRM COMBINATION (MULTIPLE CABLES, REMOTE MOUNT DRIVER)

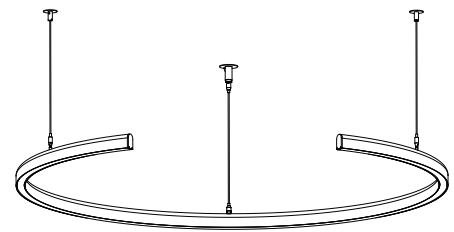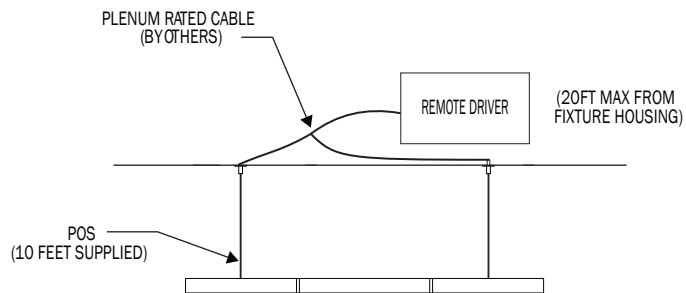

MMCD COMBINATION (MULTIPLE CABLES, CANOPY MOUNT DRIVER)

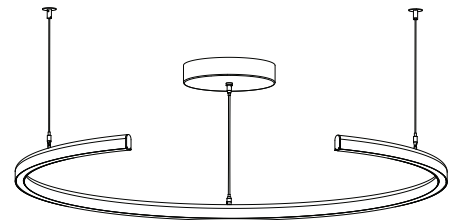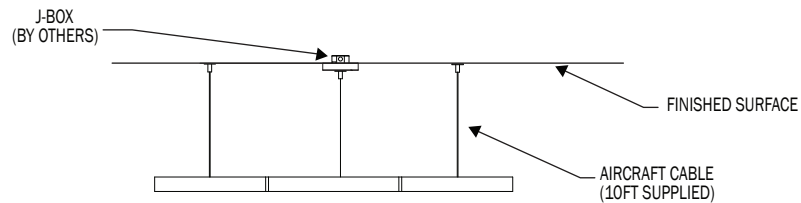

FIBONACCI CTM PENDANT


DIRECT

PN	SIZE (DIA)	LUMENS	WATTAGE
505FIC	24D	1954	26
	48D	3483	47

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 505FIC 24D 35K F05.IES

POLAR GRAPH

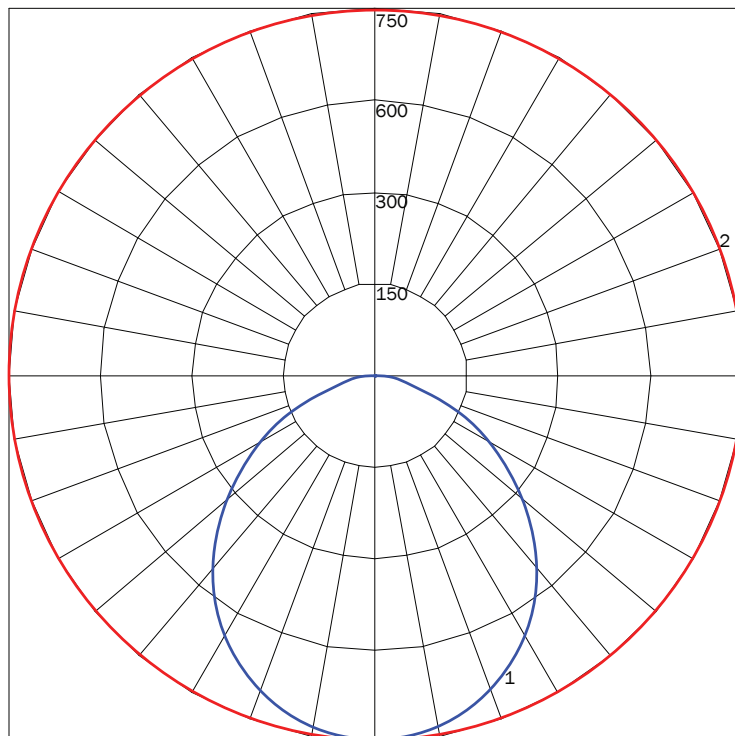

MAXIMUM CANDELA = 773 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS

1954

TOTAL LUMINAIRE EFFICIENCY

100%

LUMINAIRE EFFICACY RATING

75


TOTAL LUMINAIRE WATTS

26

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 505FIC 48D 35K F05.IES

POLAR GRAPH

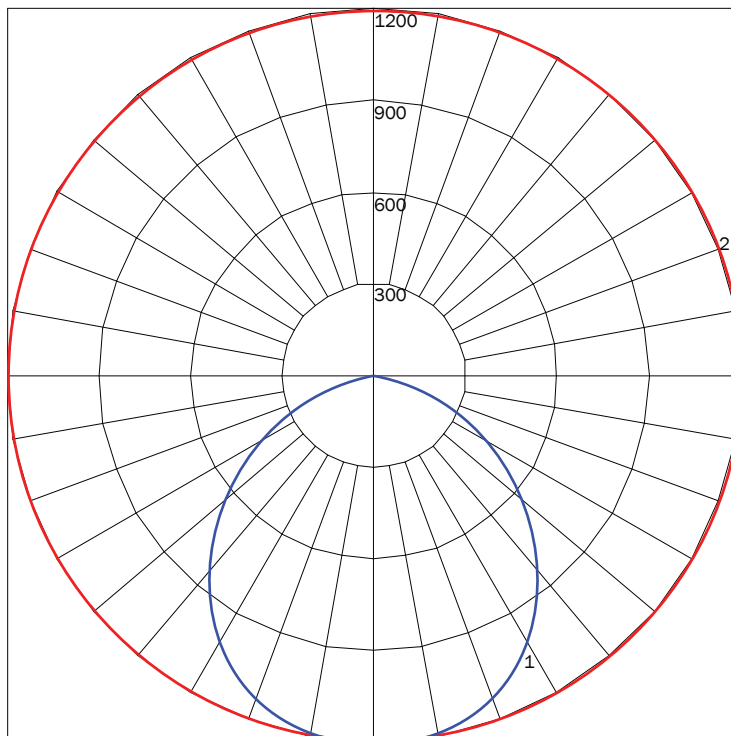

MAXIMUM CANDELA = 1342 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 45
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (45 - 225) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (25) (THROUGH MAX. CD.)

LUMINAIRE LUMENS

3483

TOTAL LUMINAIRE EFFICIENCY

100%

LUMINAIRE EFFICACY RATING

74

TOTAL LUMINAIRE WATTS

47

FIBONACCI C™ PENDANT

FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F15
MATTE
BLACK



F16
GLOSS
BLACK



F09
PEWTER



F31
SILVER
METALLIC




F18
SATIN
ALUMINUM



F21
ARCH
BRONZE

PREMIUM FINISHES



RAL
CUSTOM
(RAL #)



F40
BUBBLE
PINK



F10
FIRE
RED



F41
ELECTRIC
PURPLE



F08
MIDNIGHT
BLUE



F39
AQUA
BLUE



F13
FOREST
GREEN



F38
MEADOW
GREEN



F45
COPPER
METALLIC



F06
CLAY
BROWN



F11
CITRUS
ORANGE



F28
DARK
CHAMPAGNE



F22
HARVEST
GOLD



F14
SUNSHINE
YELLOW



F33
PYRITE
BRONZE



F07
ZEUS
BROWN



F32
BRONZE
METALLIC



F26
MELTED
COPPER



F25
MELTED
GOLD



F24
MELTED
PLATINUM



F44
FAUX
COPPER



F43
FAUX
GOLD



F42
FAUX
CHROME

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.