

FIBONACCI LTM PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____




PN: 501FIL

APPLICATION	• PENDANT MOUNT • INDOOR RATED
DIMENSION	• 71.5" L X 36" W (182CM X 91CM)
ILLUMINATION	• DIRECT • LED 90CRI • 16,800 LUMENS
DRIVER	• CANOPY OR REMOTE MOUNT • 120V, 277V, AND 347V • 10ka SURGE SUPPRESSION STANDARD
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• 96"(244CM) POWER OVER SUSPENSION
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING (1%)
WEIGHT	• 29 LBS MAXIMUM



TMSLIGHTING



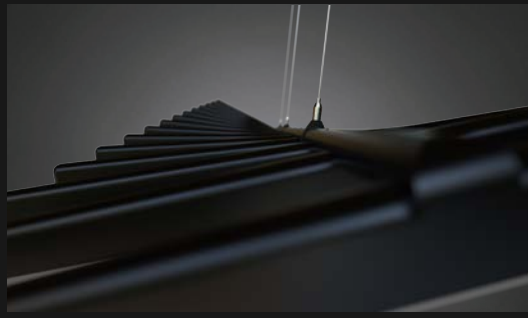

FIBONACCI LTM PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____


501FIL - 1 - 2 - 3 - 4 - 5 - 6 - 7 -

1.	36										CUS
SIZE	71.5L" X 36W (182CM X 91CM)										CUSTOM SIZE (SPECIFY)
LED (W)	210W										
LUMENS	16800										
2.	30K			35K			40K				
LED CCT	3000			3500			4000				
3.	120			277			347				
VOLTAGE	120V			277V			347V				
4.	POS										
MOUNTING	POWER OVER SUSPENSION										
5.	CD					RM					
DRIVER	CANOPY MOUNT					REMOTE MOUNT					
6.	F04	F05	F09	F15	F16	F18	F21	F31	F33	RAL	
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)	
7.	NONE					DIML					
DIMMING	---					0 - 10V DIMMING (1%)					


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

FIBONACCI LTM PENDANT

FRONT

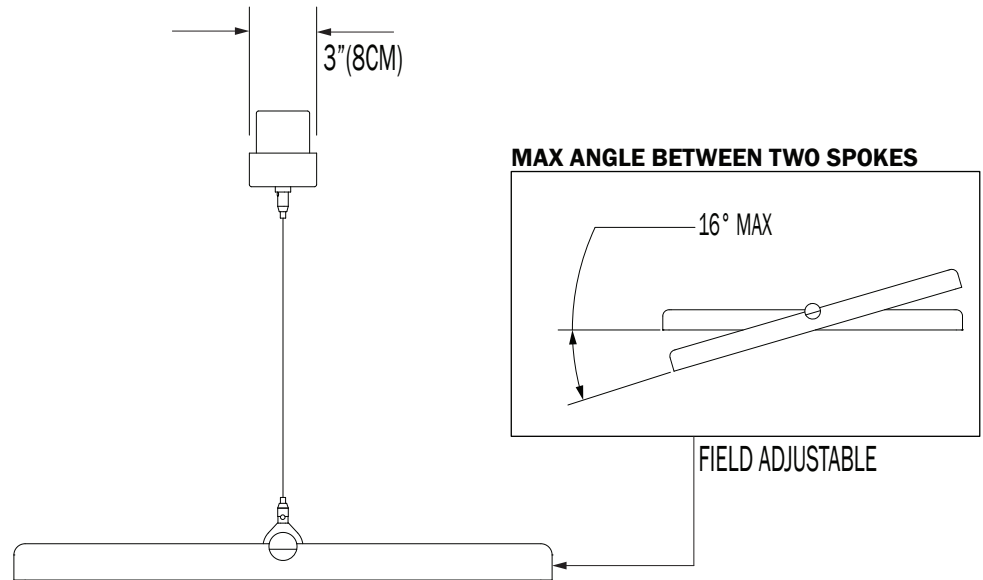


BOTTOM

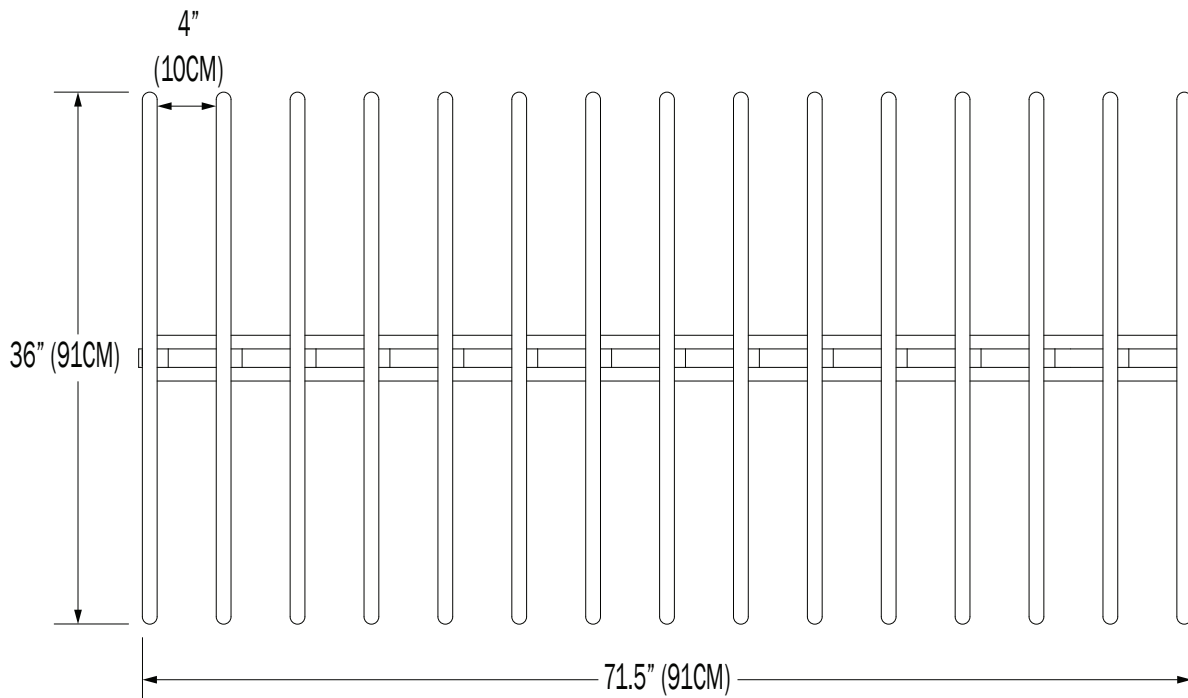


FIBONACCI LTM PENDANT

501FIL


RM - REMOTE MOUNT

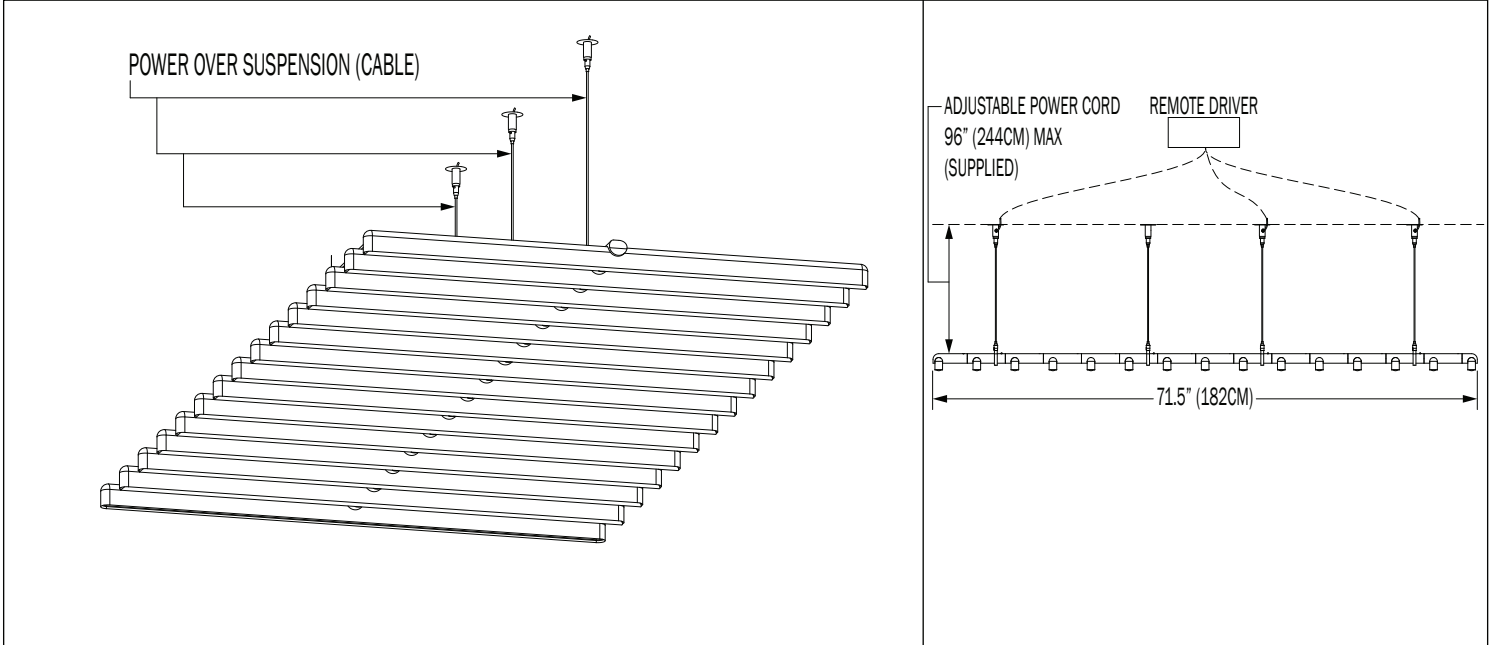


PROFILE




CD - CANOPY MOUNT

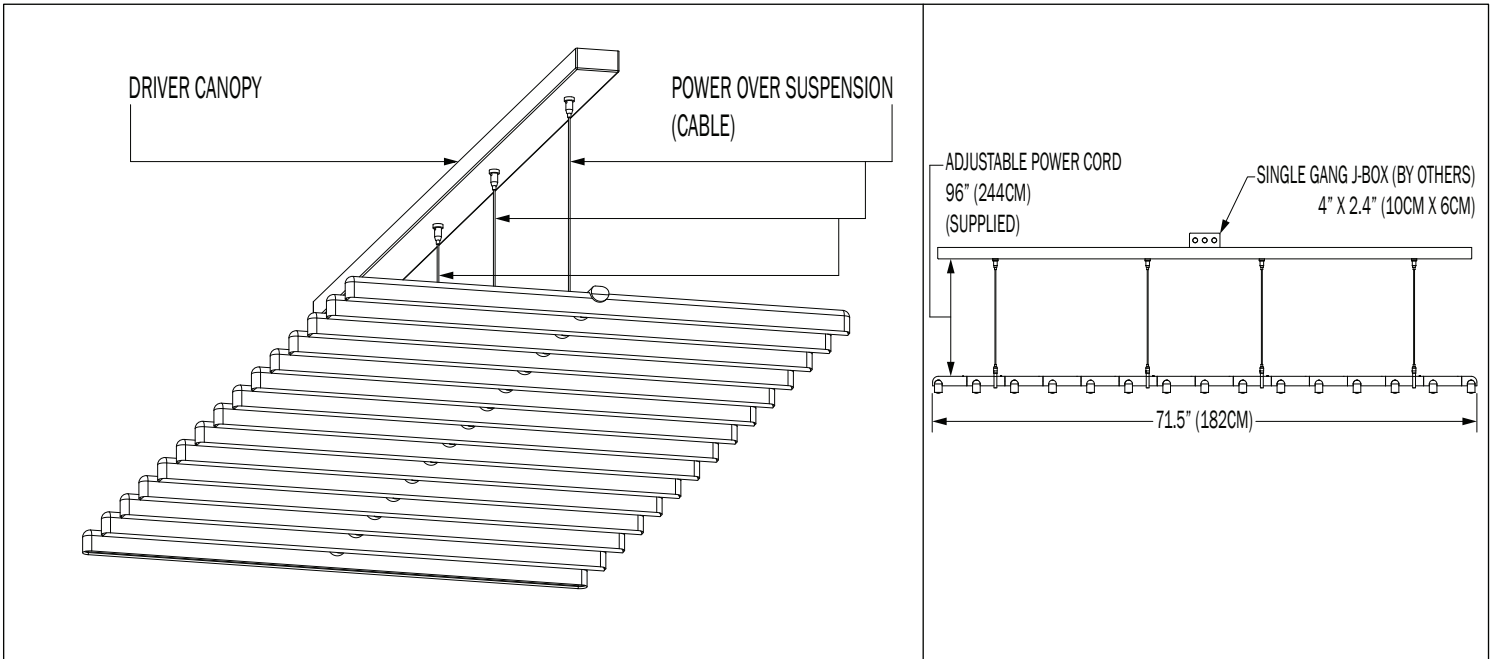


CUSTOM CONFIGURATION DRAWING IS REQUIRED IF CHOSE CUSTOM, EXAMPLE SKETCH DESIGN BELOW.

STEPS	EXAMPLE		
CONFIGURE YOUR SECTION PATTERN			
CHOOSE INDICATED DESIRED LENGTHS OF EACH SPOKES :	2'	3'	4'

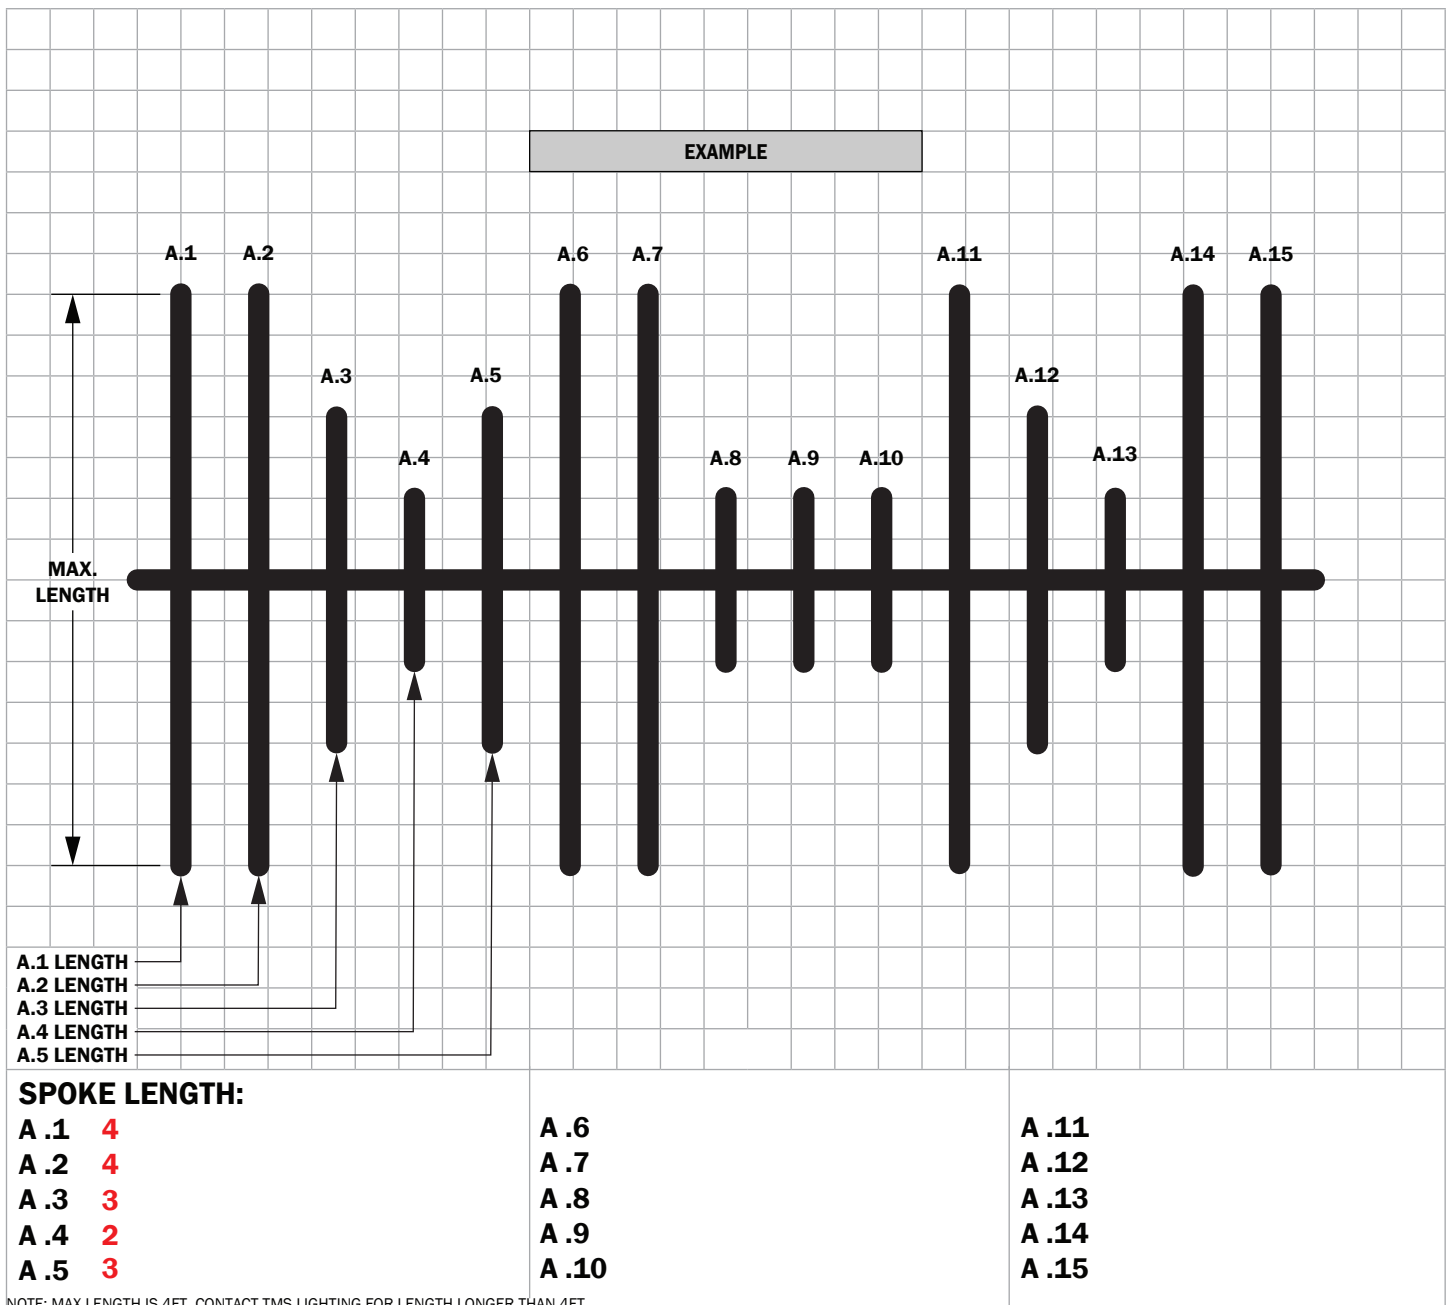

FIBONACCI LTM PENDANT

SKETCH YOUR DESIGN BELOW.

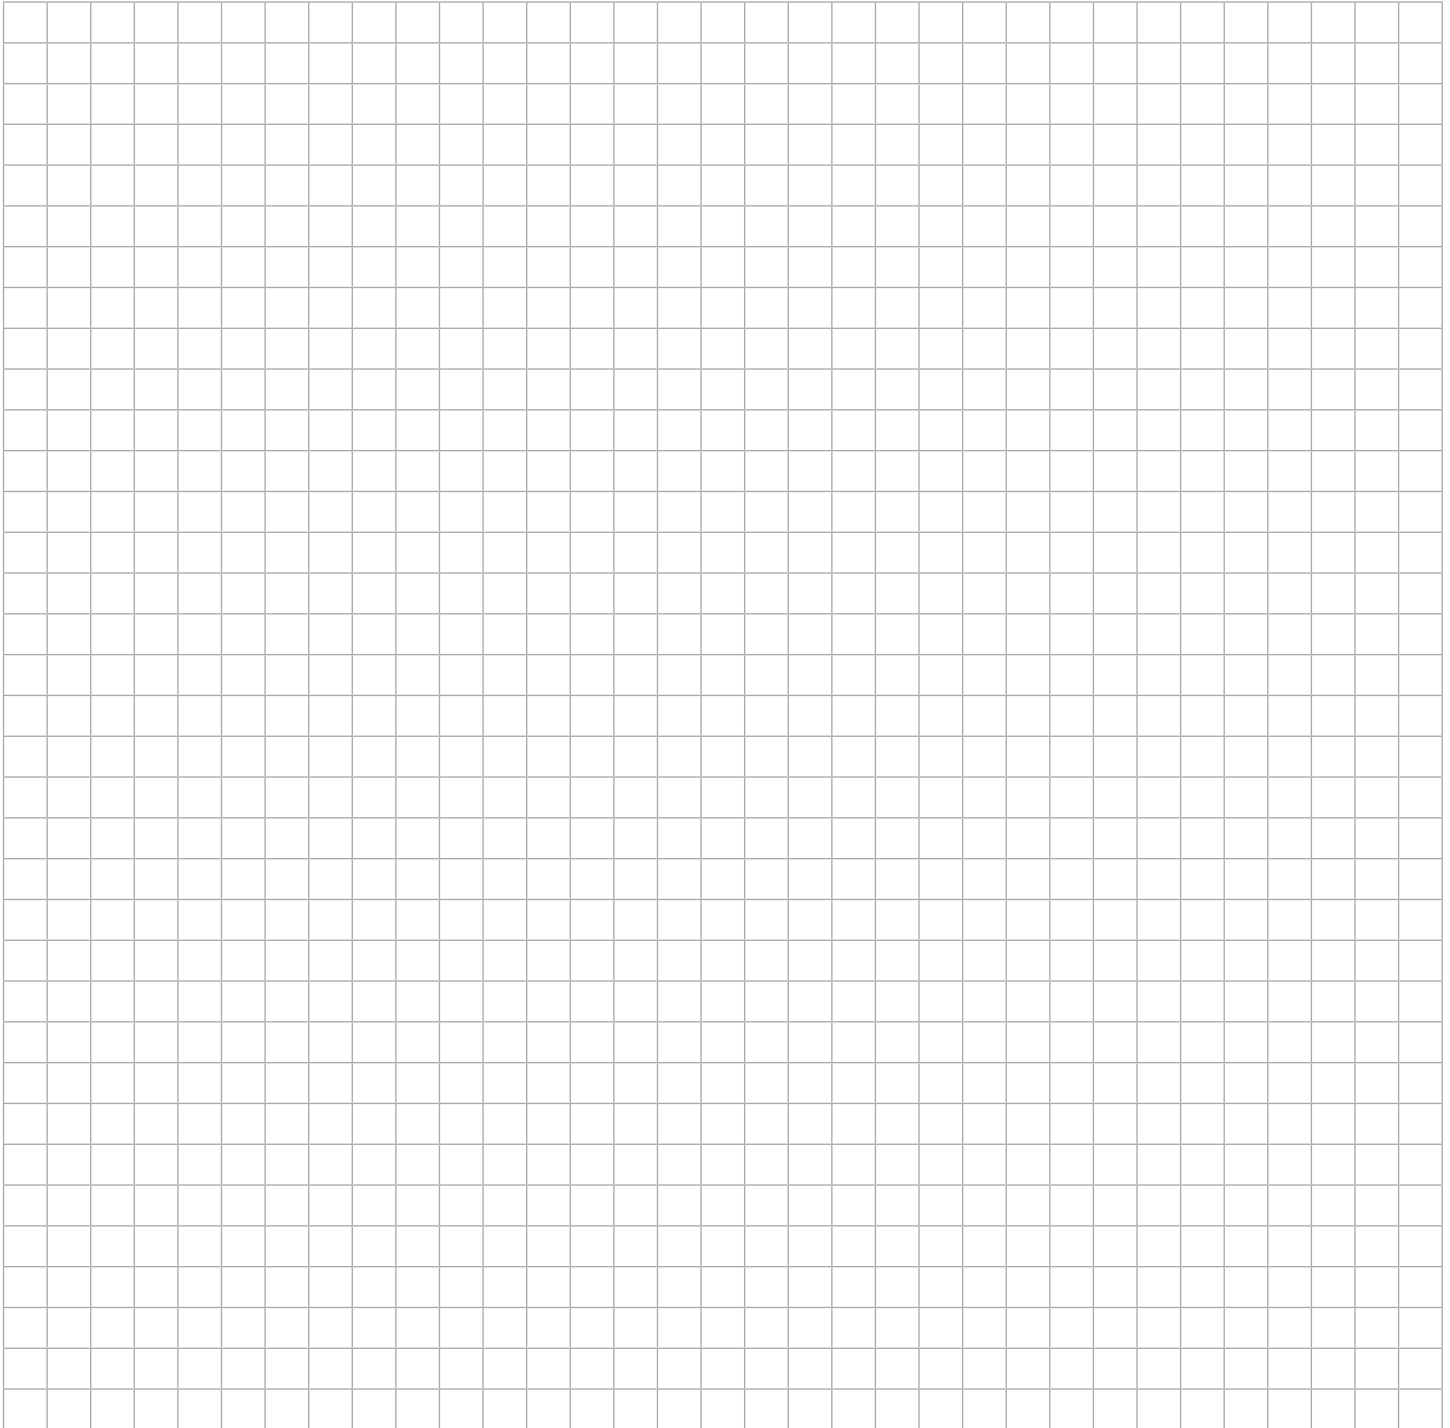A large grid of 40 columns and 40 rows, intended for sketching a design.

SPOKE LENGTH:

- | | | |
|----|-----|-----|
| 1. | 6. | 11. |
| 2. | 7. | 12. |
| 3. | 8. | 13. |
| 4. | 9. | 14. |
| 5. | 10. | 15. |

NOTE: MAX LENGTH IS 4FT. CONTACT TMS LIGHTING FOR LENGTH LONGER THAN 4FT.

FIBONACCI LTM PENDANT


DIRECT

PN	LUMENS	WATTAGE
501FIL	16800	210

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 501FIL 36 35K F05.IES

POLAR GRAPH

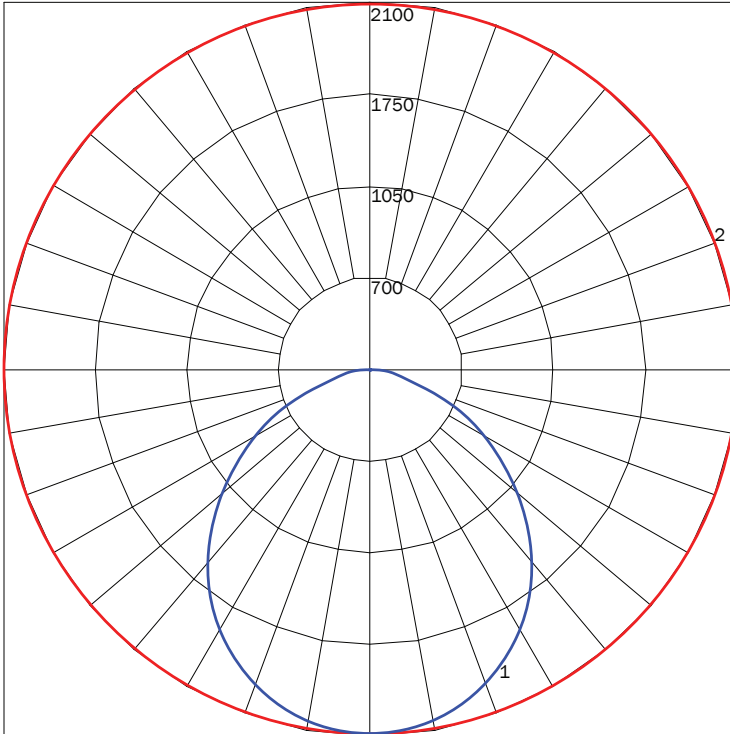

MAXIMUM CANDELA = 703.37 - LOCATED AT HORIZONTAL ANGLE = 22.5, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (22.5 - 202.5) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	16800
TOTAL LUMINAIRE EFFICIENCY	100%
LUMINAIRE EFFICACY RATING	80
TOTAL LUMINAIRE WATTS	210

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.