

FLAT TOP™ BOLLARD

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: FTB

APPLICATION	<ul style="list-style-type: none">• SURFACE MOUNT• OUTDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 6"D OR 8"D X 36"H OR 42"H (15CM OR 20CM X 91CM OR 107CM)
ILLUMINATION	<ul style="list-style-type: none">• DIFFUSE• LED 90CRI• 784 - 1,250 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120V, 277V AND 347V• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• FIXED SURFACE, MOUNT TO A SOLID FOUNDATION WITH PLATE AND ANCHOR BOLTS (SUPPLIED)
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE



DIFFUSE

FLAT TOP™ BOLLARD



PROJECT: _____

TYPE: _____

QUANTITY: _____

FTB - - - - - 1 - - - - - 2 - - - - - 3 - - - - - 4 - - - - - 5 - - - - - 6 - - - - - 7

1.	636	642	836	842
HEIGHT	6"DIA X 36"H (15CM X 92CM)	6"DIA X 42"H (15CM X 107CM)	8"DIA X 36"H (20CM X 92CM)	8"DIA X 42"H (20CM X 107CM)
2.				
ILLUMINATION ¹	14LED	19LED	14LED	19LED
LED (W)	14W	19W	14W	19W
LUMENS	784	1041	922	1250

3.	30K	35K	40K
LED CCT	3000K	3500K	4000K

4.	120	277	347
VOLTAGE	120V	277V	347V

5.	F04	F05	F09	F15	F16	F21	F24	F25	F26	F31
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC
	F32	F33	RAL							
	BRONZE METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)							


6.	---	EM	EMC
EMERGENCY ²	NONE	INTEGRAL	INTEGRAL COLD PACK

7.	---	LV6	LV6AN ³	LV8	LV8AN ³
LOUVER	NONE	WHITE, ALUMINUM, 6"	ANODIZED ALUMINUM, 6"	WHITE, ALUMINUM, 8"	ANODIZED ALUMINUM, 8"


1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

ANODIZED ALUMINUM REFLECTOR

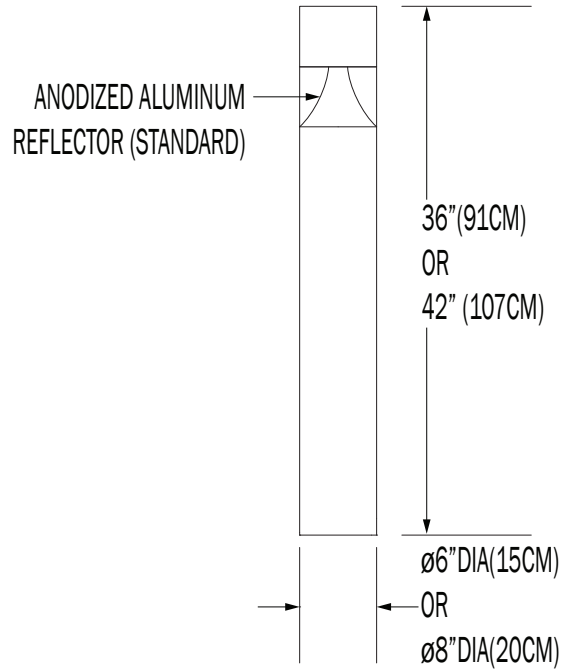

LOUVER OPTION

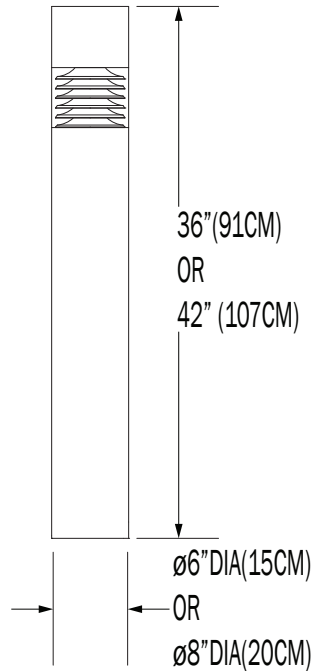

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


DIFFUSE

PN	SIZES (DIA)	ILLUMINATION	LUMENS	WATTAGE
FTB	6	14 LED	784	14
		19 LED	1041	19
	8	14 LED	922	14
		19 LED	1250	19

IES INDOOR REPORT

PHOTOMETRIC FILENAME : FTB6 14LED.IES

POLAR GRAPH

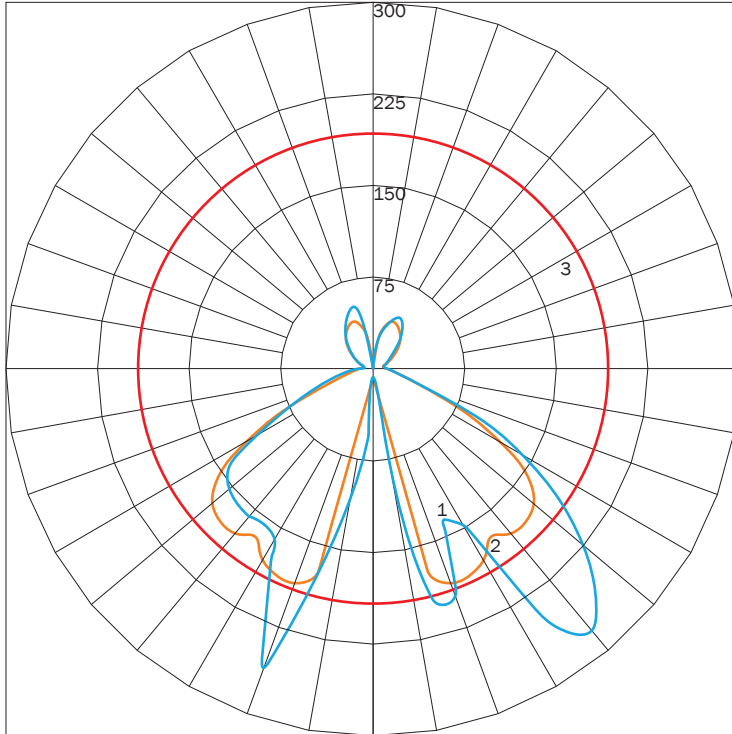

MAXIMUM CANDELA = 283.1 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 40
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (40) (THROUGH MAX. CD.)


LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

784
 NA
 49
 16

IES INDOOR REPORT

PHOTOMETRIC FILENAME : FTB 8 19LED.IES

POLAR GRAPH

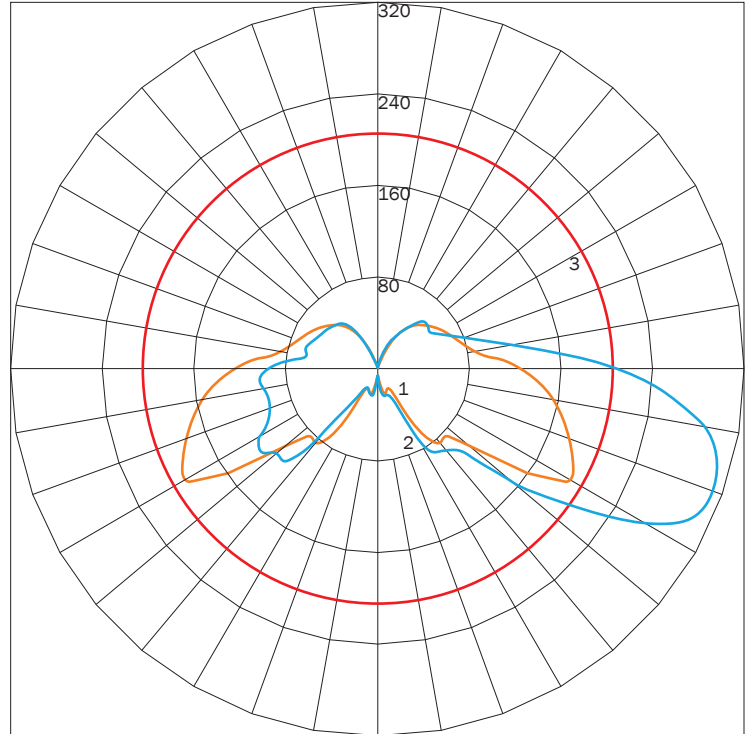

MAXIMUM CANDELA = 312.42 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 70
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (70) (THROUGH MAX. CD.)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

1250
 NA
 54
 23

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F21
ARCH
BRONZE



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F32
METALLIC
BRONZE



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.