

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: 200FLY

| | |
|---------------------|--|
| APPLICATION | <ul style="list-style-type: none"> • PENDANT MOUNT • INDOOR RATED |
| DIMENSION | <ul style="list-style-type: none"> • 24", 48", 72", 96", 120", 138", AND CUSTOM SIZE (61CM, 122CM, 183CM, 244CM, 305CM, 351CM) • HEIGHT: 1.4"H (3.6CM) |
| ILLUMINATION | <ul style="list-style-type: none"> • DIRECT OR INDIRECT/DIRECT • LED 90CRI • 3,067 - 22,200 LUMENS |
| ELECTRICAL | <ul style="list-style-type: none"> • 120, 277V AND UNI (120 - 277V) • 10kA SURGE SUPPRESSION STANDARD |
| DIFFUSERS | <ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC |
| MOUNTING | <ul style="list-style-type: none"> • 96" (244CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES |
| CONSTRUCTION | <ul style="list-style-type: none"> • ALUMINUM & STEEL |
| FINISHES | <ul style="list-style-type: none"> • AVAILABLE SPECIALTY, AND IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE |
| DIMMING | <ul style="list-style-type: none"> • 0 - 10V STANDARD DIMMING (1%) |
| WEIGHT | <ul style="list-style-type: none"> • 50 LBS MAXIMUM |





FLY™ PENDANT

PROJECT: _____
 TYPE: _____
 QUANTITY: _____

200FLY

1 2 3 4 5 6 7 8 9 10


| 1. | DIRECT | | | | | | | | |
|------------------------|--|------------|--------------------|------------------------|----------------|----------------|---|--------------------|-------------------|
| | 24D | 48D | 72D | 96D | 120D | 144D | CUS | | |
| LENGTH | 24"(61CM) | 48"(122CM) | 72"(183CM) | 96"(244CM) | 120"(305CM) | 138"(351CM) | CUSTOM LENGTH (SPECIFY LENGTHS MULTIPLES OF 6") | | |
| LED (W) | 34W | 68W | 99W | 132W | 166W | 199W | | | |
| LUMENS | 3067 | 6923 | 9256 | 12388 | 15629 | 18784 | | | |
| | INDIRECT | | | | | | | | |
| | 24ID | 48ID | 72ID | 96ID | 120ID | 144ID | CUS | | |
| LENGTH | 24"(61CM) | 48"(122CM) | 72"(183CM) | 96"(244CM) | 120"(305CM) | 138"(351CM) | CUSTOM LENGTH (SPECIFY LENGTHS MULTIPLES OF 6") | | |
| LED (W) | 34W | 68W | 99W | 132W | 166W | 199W | | | |
| LUMENS | 3711 | 7517 | 11005 | 14690 | 18400 | 22200 | | | |
| 2. | 30K | | 35K | | | 40K | | | |
| LED CCT | 3000K | | 3500K | | | 4000K | | | |
| 3. | 120 | | 277 | | | UNI | | | |
| VOLTAGE | 120V | | 277V | | | 120 - 227V | | | |
| 4. | SW | | | | | | | | |
| DIFFUSER | SATIN | | | | | | | | |
| 5. | ACC | | | ACT | | | | | |
| MOUNTING | CABLE & CORD | | | CABLE & CORD FOR T-BAR | | | | | |
| 6. | BC | | | WC | | | | | |
| CORD | BLACK DROP CORD | | | WHITE DROP CORD | | | | | |
| 7. | ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART | | F04 | F05 | F15 | F16 | F09 | F31 | F18 |
| FINISH | | | MATTE WHITE | GLOSS WHITE | MATTE BLACK | GLOSS BLACK | PEWTER | SILVER METALLIC | SATIN ALUMINUM |
| 8. | --- | | | EMR | | | | | |
| EMERGENCY ¹ | NONE | | | REMOTE | | | | | |
| 9. | --- | | DOS | | DS | | OS | | |
| SENSORS | NONE | | DAYLIGHT/OCCUPANCY | | DAYLIGHT | | OCCUPANCY | | |
| 10. | DIML | | | | | | | | |
| DIMMING | LED DIMMING (0 - 10V, CURRENT - SINKING) | | | | | | | | |

1. 10W AT 90 MINUTES. EMERGENCY (EMR) OPTION ILLUMINATES MAX OF 2 FT.


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING







24D/ID




48D/ID




72D/ID

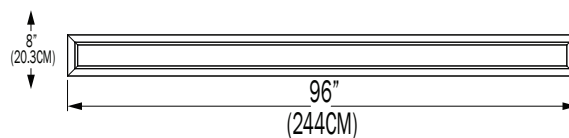

96D/ID

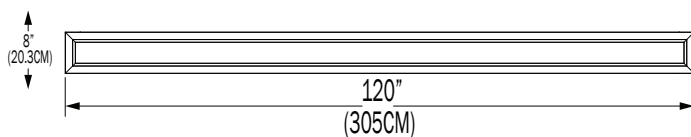






120D/ID

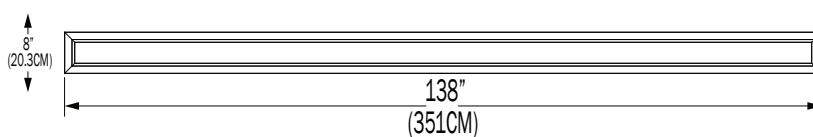

144D/ID



CUS (SPECIFY IN MULTIPLES OF 6")

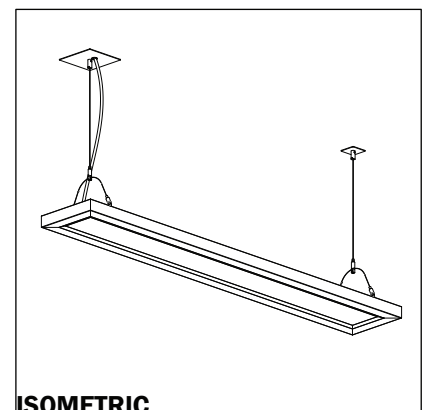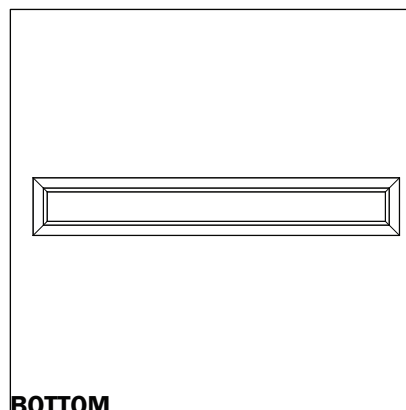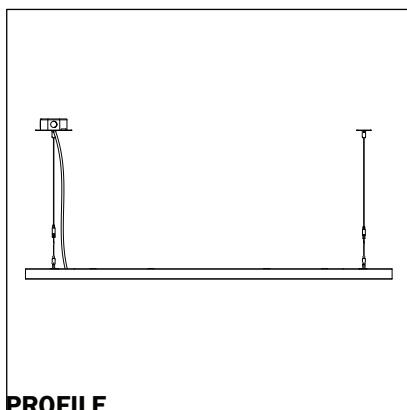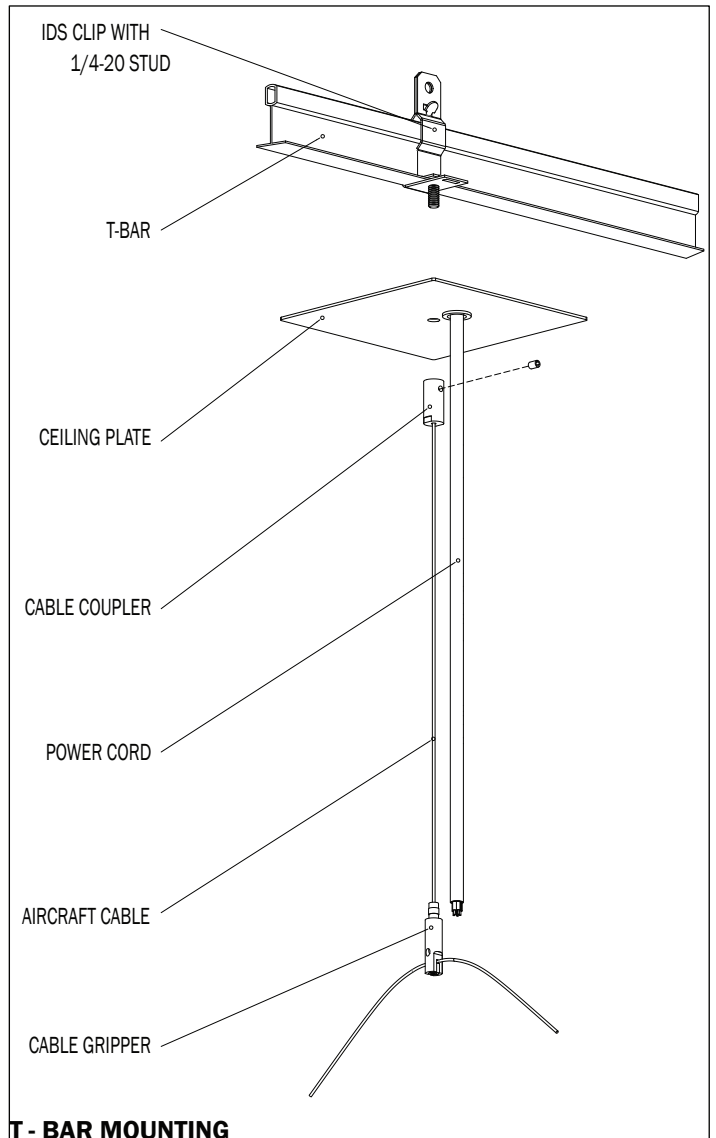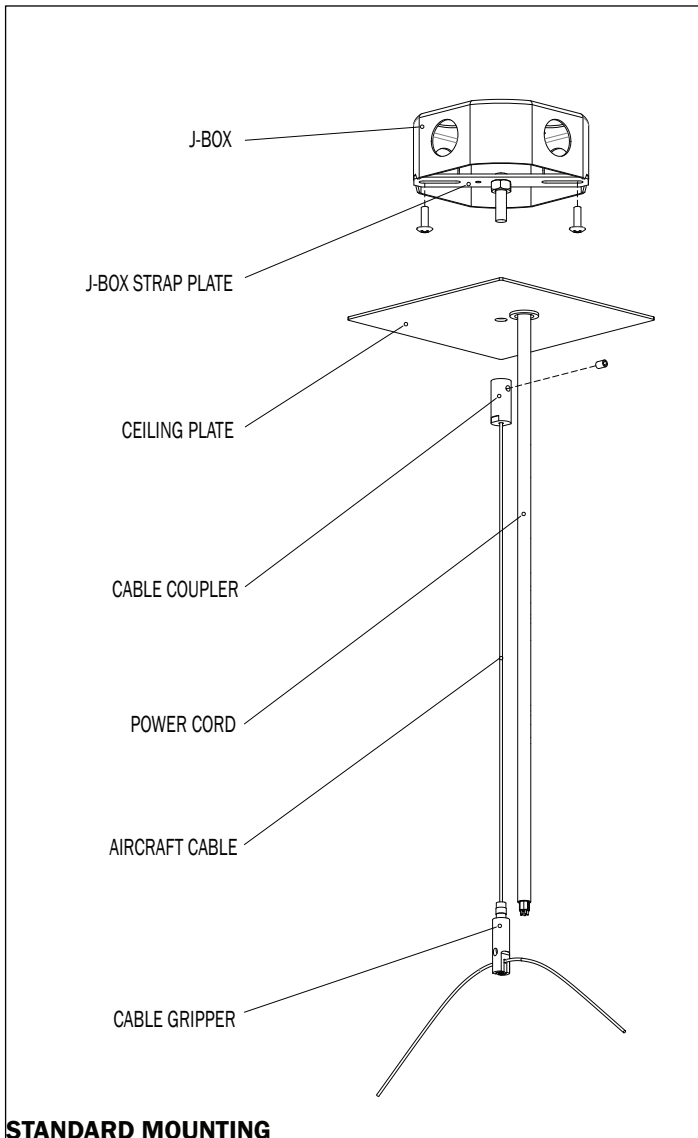


DIRECT

| PN | SIZE (LENGTH) | LUMENS | WATTAGE |
|--------|---------------|--------|---------|
| FLY200 | 24D | 3067 | 34 |
| | 48D | 6923 | 68 |
| | 72D | 9256 | 99 |
| | 96D | 12388 | 132 |
| | 120D | 15629 | 166 |
| | 144D (138") | 18784 | 199 |

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 200FY D24 35K SW F05.IES

POLAR GRAPH

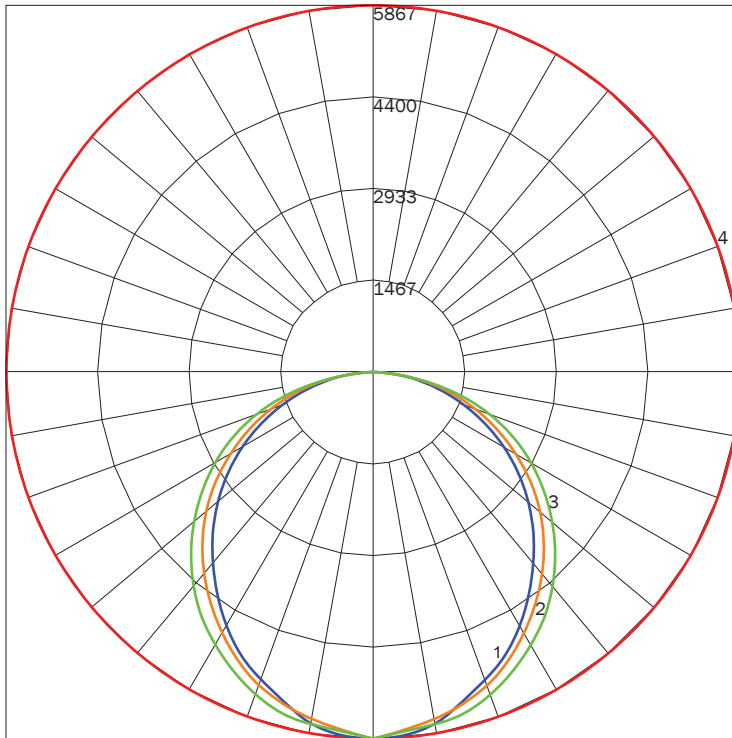

MAXIMUM CANDELA = 1016.78 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (45 - 225)
 # 3 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 4 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS

3067

TOTAL LUMINAIRE EFFICIENCY

71%

LUMINAIRE EFFICACY RATING

90

TOTAL LUMINAIRE WATTS

34


INDIRECT / DIRECT

| PN | SIZE (LENGTH) | LUMENS | WATTAGE |
|--------|---------------|--------|---------|
| FLY200 | 24ID | 3711 | 34 |
| | 48ID | 7517 | 68 |
| | 72ID | 11005 | 99 |
| | 96ID | 14690 | 132 |
| | 120ID | 18400 | 166 |
| | 144ID (138") | 22200 | 199 |

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 200FY ID144 35K SW F05

POLAR GRAPH

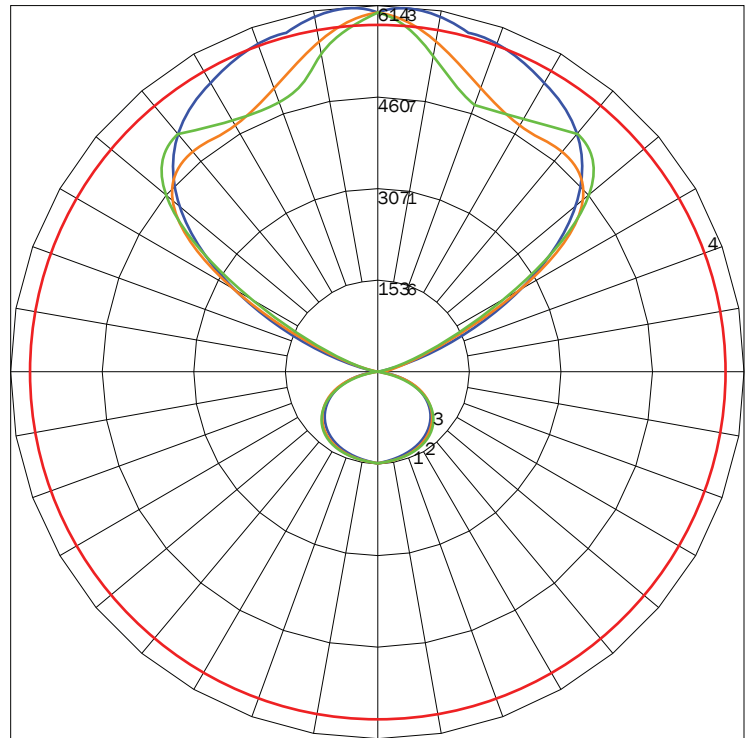

MAXIMUM CANDELA = 5866.58 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (45 - 225)
 # 3 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 4 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS

22221

TOTAL LUMINAIRE EFFICIENCY

89%

LUMINAIRE EFFICACY RATING

112

TOTAL LUMINAIRE WATTS

198.72

FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM

PREMIUM FINISHES



F31¹
SILVER
METALLIC



F09
PEWTER



F40
BUBBLE
PINK



F10
FIRE
RED



F41
ELECTRIC
PURPLE



F08
MIDNIGHT
BLUE



F39
AQUA
BLUE



F13
FOREST
GREEN



F38
MEADOW
GREEN



F45
COPPER
METALLIC



F06
CLAY
BROWN



F11
CITRUS
ORANGE



F28¹
DARK
CHAMPAGNE



F22¹
HARVEST
GOLD



F14
SUNSHINE
YELLOW



F33¹
PYRITE
BRONZE



F07
ZEUS
BROWN



F21
ARCH
BRONZE



F32¹
BRONZE
METALLIC




F26¹
MELTED
COPPER




F25¹
MELTED
GOLD



F24¹
MELTED
PLATINUM



F44¹
FAUX
COPPER



F43¹
FAUX
GOLD



F42¹
FAUX
CHROME



RAL
CUSTOM
(RAL #)

PREMIUM MATERIALS



AN^{1 2}
ANODIZED

1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.