

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

QUANTITY: \_\_\_\_\_



## PN: 550IN

<b>APPLICATION</b>	<ul style="list-style-type: none"> <li>• PENDANT MOUNT</li> <li>• INDOOR RATED</li> </ul>
<b>DIMENSION</b>	<ul style="list-style-type: none"> <li>• 25" DIA X 4" H (64CM X 10CM)</li> </ul>
<b>ILLUMINATION</b>	<ul style="list-style-type: none"> <li>• INDIRECT</li> <li>• LED 90CRI</li> <li>• 6,275 LUMENS</li> </ul>
<b>ELECTRICAL</b>	<ul style="list-style-type: none"> <li>• 120 - 277V (347V CONSULT FACTORY)</li> <li>• 10kA SURGE SUPPRESSION STANDARD</li> </ul>
<b>DIFFUSERS</b>	<ul style="list-style-type: none"> <li>• HIGH EFFICIENCY ACRYLIC</li> </ul>
<b>MOUNTING</b>	<ul style="list-style-type: none"> <li>• 15" (38CM) STEM MOUNT</li> </ul>
<b>CONSTRUCTION</b>	<ul style="list-style-type: none"> <li>• STEEL</li> </ul>
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>• AVAILABLE IN SEVERAL TMS PLATED, AND POWDER COATED FINISHES</li> <li>• CUSTOM RAL FINISHES AVAILABLE</li> </ul>
<b>DIMMING</b>	<ul style="list-style-type: none"> <li>• 0 - 10V STANDARD DIMMING (1%)</li> </ul>
<b>WEIGHT</b>	<ul style="list-style-type: none"> <li>• 17 LBS MAXIMUM</li> </ul>



# INDI™ PENDANT



PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_



QUANTITY: \_\_\_\_\_

**550IN** - - - - - 1 - - - - - 2 - - - - - 3 - - - - - 4 - - - - - 5 - - - - - 6 - - - - - 7

<b>1.</b>	<b>ILLUMINATION</b>									
	<b>54LED</b>									
	LED (W)	54W								
LUMENS	6275									
<b>2.</b>	<b>30K</b>			<b>35K</b>			<b>40K</b>			
	LED CCT	3000K		3500K			4000K			
<b>3.</b>	<b>120</b>					<b>277</b>				
	VOLTAGE	120V					277V			
<b>4.</b>	<b>SN</b>	<b>SB</b>	<b>CH</b>	<b>BC</b>	<b>AC</b>	<b>AB</b>	<b>PB</b>	<b>F04</b>	<b>F05</b>	<b>F09</b>
	SATIN NICKEL	SATIN BRASS	CHROME	BLACK CHROME	ANTIQUE COPPER	ANTIQUE BRASS	POLISHED BRASS	MATTE WHITE	GLOSS WHITE	PEWTER
	<b>F15</b>	<b>F16</b>	<b>F19</b>	<b>F21</b>	<b>F31</b>	<b>F32</b>	<b>F33</b>	<b>RAL</b>		
FINISH	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)		
<b>5.</b>	<b>CD</b>					<b>OD</b>				
	DUST COVER	CLEAN DUST COVER					OPAL - WHITE DUST COVER			
<b>6.</b>	---					<b>DIML</b>				
	DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)			
<b>7.</b>	---					<b>EMR</b>				
	EMERGENCY <sup>1</sup>	NONE					REMOTE			

1. 10W AT 90 MINUTES

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

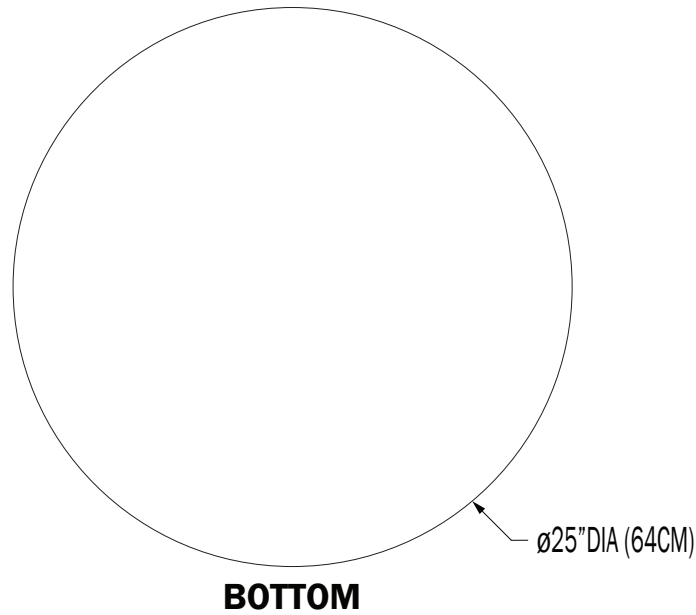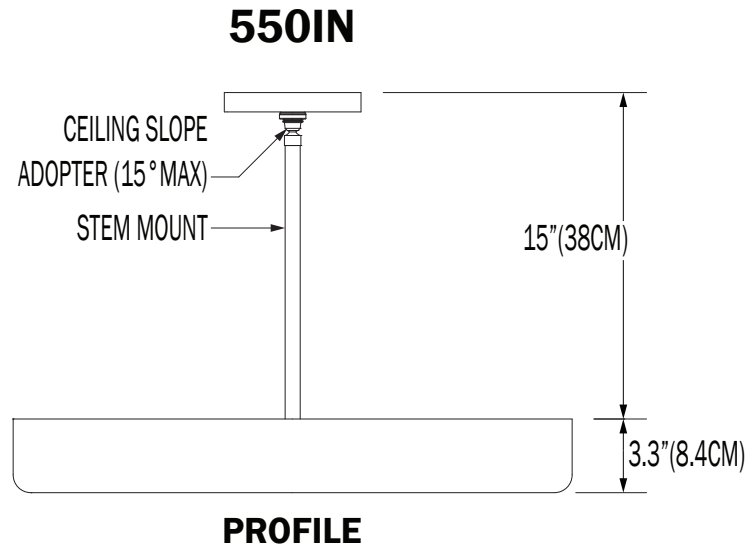

## CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


## INDIRECT

PN	LUMENS	WATTAGE
550IN	6275	54

### IES INDOOR REPORT

PHOTOMETRIC FILENAME : 550IN 54LED.IES

### POLAR GRAPH

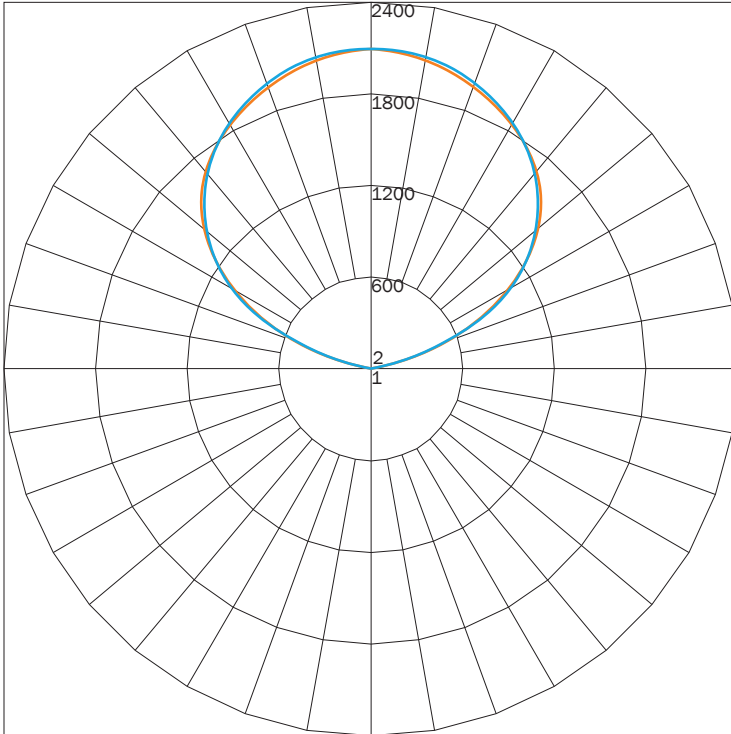

MAXIMUM CANDELA = 2100.09 LOCATED AT HORIZONTAL ANGLE = 120, VERTICAL ANGLE = 170  
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)  
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

<b>LUMINAIRE LUMENS</b>	6275
<b>TOTAL LUMINAIRE EFFICIENCY</b>	NA
<b>LUMINAIRE EFFICACY RATING</b>	101
<b>TOTAL LUMINAIRE WATTS</b>	62

## AVAILABLE FINISHES



**SN**  
SATIN  
NICKEL



**SB**  
SATIN  
BRASS



**CH**  
CHROME



**BC**  
BLACK  
CHROME



**AC**  
ANTIQUÉ  
COPPER



**AB**  
ANTIQUÉ  
BRASS



**PB**  
POLISHED  
BRASS



**F04**  
MATTE  
WHITE



**F05**  
GLOSS  
WHITE



**F09**  
PEWTER



**F15**  
MATTE  
BLACK



**F16**  
GLOSS  
BLACK



**F18**  
SATIN  
ALUMINUM



**F21**  
ARCH  
BRONZE




**F31**  
SILVER  
METALLIC



**F32**  
METALLIC  
BRONZE



**F33**  
PYRITE  
BRONZE



**RAL**  
CUSTOM  
COLOR  
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.