

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: JAZ

APPLICATION	• PENDANT MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	• 14", 16", 18", 20", 22", 24" (36CM, 41CM, 46CM, 51CM, 56CM, 61CM)
ILLUMINATION	• DIRECT • LED 90CRI • 1,426 - 1,888 LUMENS
ELECTRICAL	• 120 - 277V (347V CONSULT FACTORY) • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• CLEAR OR FROSTED, TEMPERED GLASS GLOBE
MOUNTING	• 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE • 1" TO 60" (2.5CM TO 152CM) STEM MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS SPECIALTY, AND POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 12 LBS MAXIMUM





JAZZ™ PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____

JAZ - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12

1.	I						O											
APPLICATION	INDOOR						OUTDOOR											
2.	14		16		18		20		22		24							
DIAMETER	14"DIA (36CM)		16"DIA (40CM)		18"DIA (46CM)		20"DIA (51CM)		22"DIA (56CM)		24"DIA (61CM)							
3.																		
ILLUMINATION	100IN	15LED	100IN	15LED	100IN	15LED	100IN	19LED	100IN	19LED	100IN	19LED						
LED (W)	100W	15W	100W	15W	100W	15W	100W	19W	100W	19W	100W	19W						
LUMENS	1426	1109	1447	1107	1205	1589	1452	1887	1678	1888	1024	1888						
4.	CRD		C01		C06		C12		C18		C24		C36		C48		C60	
MOUNTING	120"(305CM) DROP CORD		1"(2.5CM) STEM MOUNT		6"(15CM) STEM MOUNT		12"(31CM) STEM MOUNT		18"(46CM) STEM MOUNT		24"(61CM) STEM MOUNT		36"(91CM) STEM MOUNT		48"(122CM) STEM MOUNT		60"(152CM) STEM MOUNT	
5.	----						BC						WC					
CORD	NONE						BLACK DROP CORD						WHITE DROP CORD					
6.	----				30K				35K				40K					
LED CCT	NONE				3000				3500				4000					
7.	120					277					347							
VOLTAGE	120V					277V					347V							
8.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART					F04	F05	F15	F16	F09	F31	F18						
FINISH¹						MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM						
						F06	F07	F08	F10	F11	F13	F14	F21	F22	F25			
						CLAY BROWN	ZEUS BROWN	MIDNIGHT BLUE	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUM			
9.	----		G1		G2		G9		G11		G12							
GLOBE/ LENS	NONE		CLEAR, ELONGATED GLOBE		FROSTED GLOBE		CLEAR,ELONGATED, LARGE GLOBE		CLEAR, ELONGATED GLOBE WITH CAST GUARD		CLEAR, ELONGATED LARGE GLOBE WITH CAST GUARD							
10.	---						DIML											
DIMMING	NONE						LED DIMMING (0 - 10V, CURRENT - SINKING)											
11.	----		EM		EMC		EMR		EMCR									
EMERGENCY²	NONE		INTEGRAL		INTEGRAL COLD PACK		REMOTE		REMOTE COLD PACK									
12.	----					BL					ACC							
MOUNTING³ ACCESSORIES	NONE					CEILING SLOPE ADAPTER FOR STEM MOUNT					AIRCRAFT CABLE FOR DROP CORDS							

1. A CLEAR COAT IS APPLIED TO COPPER. PATINA WILL FORM OVER TIME

2. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS


3. MAY REQUIRE TO COMPLY WITH LOCAL SEISMIC/EARTHQUAKE CODE

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING


JAZ - 14"

4LB




JAZ - 20"

8LB

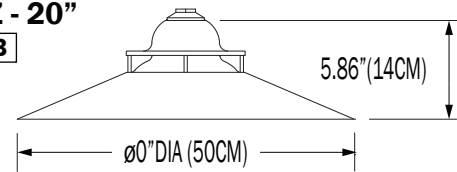


JAZ - 16"

5LB




JAZ - 22"

10LB

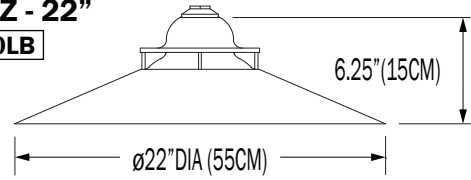


JAZ - 18"

7LB

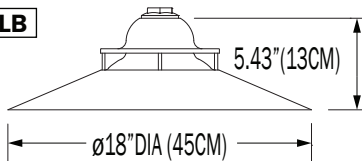


JAZ - 24"

12LB

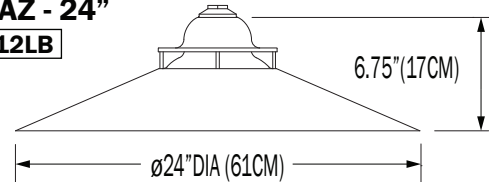


DROP CORD

REMOTE DRIVER ENCLOSURE

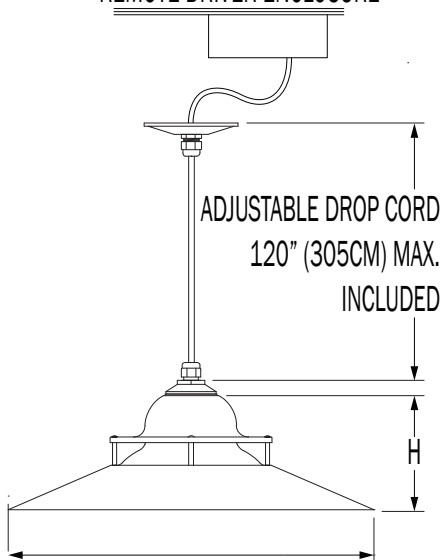


OPTIONAL DRIVER ENCLOSURE



STEM MOUNT

REMOTE DRIVER ENCLOSURE

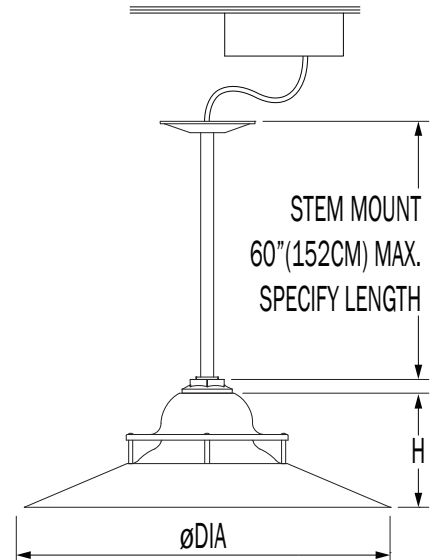

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


DIRECT

PN	SIZE (DIA)	ILLUMINATION	LUMENS	WATTAGE
JAZ	14	100IN	1426	100
		15LED	1109	15
	16	100IN	1447	100
		15LED	1107	15
	18	100IN	1205	100
		15LED	1589	15
	20	100IN	1452	100
		19LED	1887	19
	22	100IN	1678	100
		19LED	1888	19
	24	100IN	1024	100
		19LED	1888	19

IES INDOOR REPORT

PHOTOMETRIC FILENAME : JAZ 14 100IN F05.IES

POLAR GRAPH

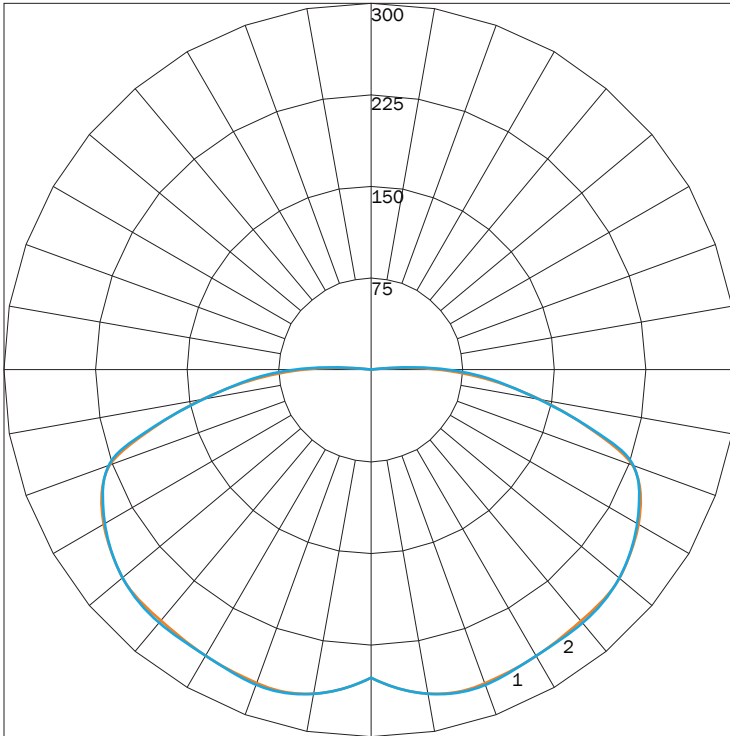

MAXIMUM CANDELA = 274.644 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 15
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

1426

TOTAL LUMINAIRE EFFICIENCY

84%

LUMINAIRE EFFICACY RATING

14


TOTAL LUMINAIRE WATTS

100

IES INDOOR REPORT

PHOTOMETRIC FILENAME : JAZ 24 19LED F05.IES

POLAR GRAPH

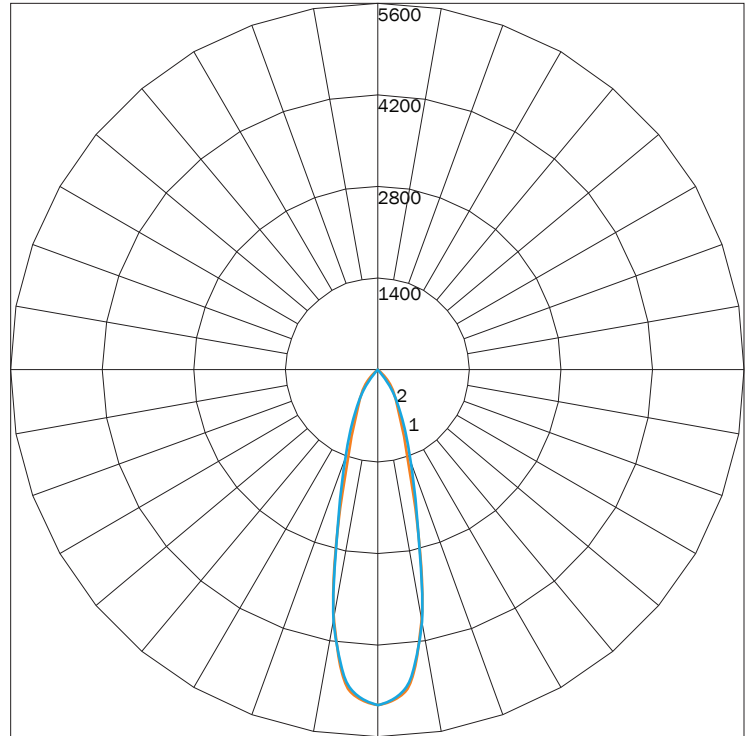

MAXIMUM CANDELA = 5115.48 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

1888

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

88

TOTAL LUMINAIRE WATTS

21

STANDARD PAINT FINISHES



PREMIUM PAINT FINISHES



PREMIUM MATERIALS



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: PREMIUM PLATED AND PREMIUM MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.