PROJECT:

TYPE:

QUANTITY:



PN: JUN

APPLICATION	PENDANT MOUNT INDOOR RATED	
DIMENSION	• 11.5" (29CM)	
ILLUMINATION	• DIRECT • LED 90CRI • 1,852 LUMENS	
ELECTRICAL	 120 - 277V (347V CONSULT FACTORY) 10kA SURGE SUPRESSION STANDARD 	
DIFFUSERS	HIGH EFFICIENCY ACRYLIC	
MOUNTING	 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE 	
CONSTRUCTION	ALUMINUM OR COPPER	
FINISHES	SHES • AVAILABLE IN BRUSHED, ANODIZED, PLATED, AND SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE	
DIMMING	• 0 - 10V STANDARD DIMMING	
WEIGHT	• 6.5 LBS MAXIMUM	



TMSLIGHTING







PROJECT: _____

TYPE:

QUANTITY: _____

JUN -1 3 4 5 6 7 8 9 2

1.	ILLUMINATION										
	15LED				19LED						
LED (W)	15W						19W				
LUMENS			1076					1852			
2.		CRD									
MOUNTING	120" (305CM) DROP CORD										
3.	BC				WC						
CORD		B	LACK DROP COF	D				WHITE DROP COP	IITE DROP CORD		
4.	30К 35К 40К			40K							
LED CCT		3000K 3500K 4000K									
5.	120				277						
VOLTAGE	120V			277V							
6.	F04	F05	F15	F16	F09	F31	F18	F06	F07	F08	
	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUI	CLAY M BROWN	ZEUS BROWN	MIDNIGHT BLUE	
	F10	F11	F13	F14	F21	F22	F24	F25	F26	F28	
	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUN		MELTED COPPER	DARK CAMPAGNE	
FINISH	F32	F33	F38	F39	F40	F41	F42	F43	F44	F45	
	BRONZE METALLIC	PYRITE BRONZE	MEADOW GREEN	AQUA BLUE	BUBBLE PINK	ELECTRIC PURPLE	FAUX CHROME	FAUX GOLD	FAUX COPPER	COPPER METALLIC	
	RAL	AN	BR	CO	SS						
	CUSTOM (SPECIFY RAL)	ANODIZED	BRUSHED ALUMINUM	SOLID COPPER	STAINLESS STEEL						
7.					DIML						
DIMMING	NONE			LED DIMMING (0 - 10V, CURRENT - SINKING)							
8.					EMR						
EMERGENCY ²		NONE REMOTE									
9.		ACC									
MOUNTING ³ ACCESSORIES	AIRCRAFT CABLE DROP CORDS										

1. A CLEAR COAT IS APPLIED TO COPPER. PATINA WILL FORM OVER TIME 2. 10W AT 90 MINUTES 3. MAY REQUIRE TO COMPLY WITH LOCAL SEISMIC/EARTHQUAKE CODE


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.





DROP CORD MOUNT W/ AIRCRAFT CABLE



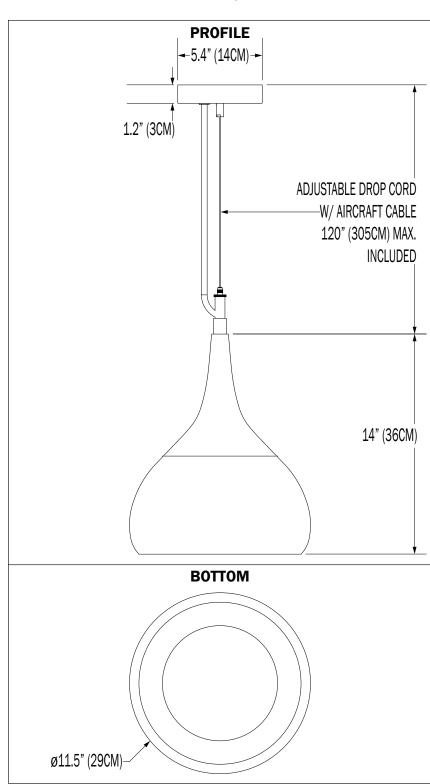

CUSTOM

TMSLIGHTING


NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: https://tmslighting.com/sales-agents.html

DIRECT

PN	ILLUMINATION	LUMENS	WATTAGE
JUN	15LED	1076	15
	19LED	1852	19

IES INDOOR REPORT PHOTOMETRIC FILENAME : JUN 15LED.IES

POLAR GRAPH

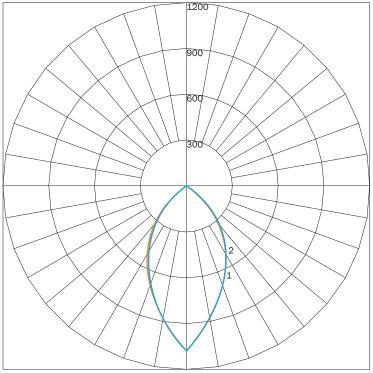


MAXIMUM CANDELA = 1079.77 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	1076
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	65
TOTAL LUMINAIRE WATTS	17

IES INDOOR REPORT PHOTOMETRIC FILENAME : JUN 19LED.IES

POLAR GRAPH

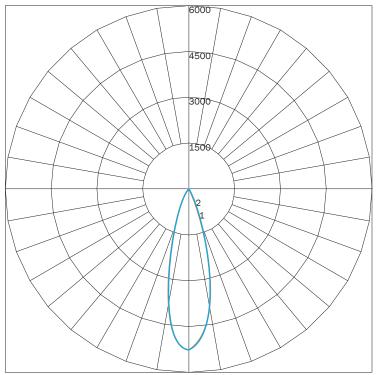

MAXIMUM CANDELA = 5266.71 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	1852
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	89
TOTAL LUMINAIRE WATTS	21





FINISHES







FINISHES ARE SUBJECT TO AVAILAB ILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP. DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE. 2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

TMSLIGHTING