PROJECT:	
TYPE:	
OLIA NITITY:	



PN: KG600GR

APPLICATION	WALL MOUNT
	 INDOOR OR OUTDOOR RATED
DIMENSION	• 25.5"H OR 37.5"H (65CM, 95CM)
	• DEPTH: 4.94" (13CM)
ILLUMINATION	• DIFFUSE
	LED 90CRI
	• 1,265 LUMENS
ELECTRICAL	• 120V, 277V AND 347V
	 10ka SURGE SUPRESSION STANDARD
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	 WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	 ALUMINUM, SOLID COPPER OR STAINLESS STEEL
FINISHES	AVAILABLE IN SPECIALTY, SEVERAL TMS PLATED, AND
	POWDER COATED FINISHES
	 CUSTOM RAL FINISHES AVAILABLE
DIMMING	0 - 10V STANDARD DIMMING





PROJECT: ______ TYPE: QUANTITY: _____

KG600GR								
	1	2	3	4	5	6	7	8

1.	l l	0
APPLICATION	INDOOR	OUTDOOR
2.	25	37
SIZE	25.5"H X 11.9"W X 5"D (65CM X 30C	M X 13CM) 37.5"H X 11.9"W X 5"D (95CM X 30CM X 13CM)
3.	31LED	40LED
ILLUMINATION	31W LED	40W LED
LED (W)	31W LED 31W	40W LED 40W

4.	30K	35K	40K
LED CCT	3000	3500	4000
5.	120	277	347

6.	CO ¹	SS ²	SN ²	CH ²	BC ²	AC ²	AB ²	SB ²	PB ²	F04
	SOLID COPPER	STAINLESS STEEL	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUE COPPER	ANTIQUE BRASS	SATIN BRASS	POLISHED BRASS	MATTE WHITE
	F05	F09	F15	F16	F18	F24	F25	F26	F31	F33
FINISH	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE
	RAL									
	CUSTOM (SPECIFY)									


7.	0P	SD	FPD
DIFFUSER	OPAL - WHITE ACRYLIC	SAND - BLASTED WHITE ACRYLIC	FAUX PERFORATED


8.		DIML
DIMMING	NONE	LED DIMMING (0 - 10V, CURRENT - SINKING)


^{1.} A CLEAR COAT IS APPLIED TO COPPER. PATINA WILL FORM OVER TIME 2. PLATED FINISHES ARE INDOOR APPLICATIONS ONLY

KG600GR - 25"

KG600GR - 37"

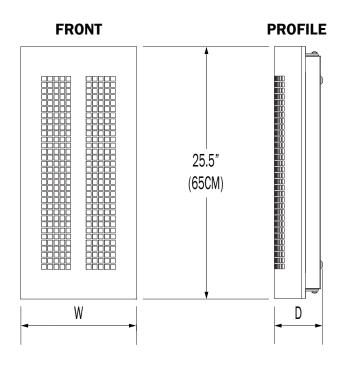

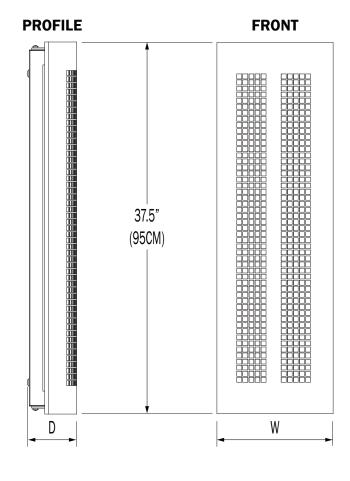

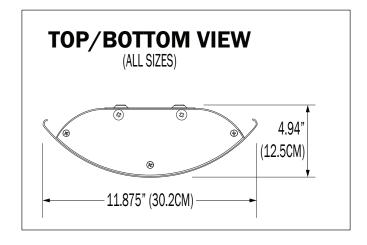


DIFFUSE

PN	ILLUMINATION	LUMENS	WATTAGE
KG6000W	31LED	1265	31

IES INDOOR REPORT

PHOTOMETRIC FILENAME: KG600 GR 25 31LED F05 OP.IES

POLAR GRAPH

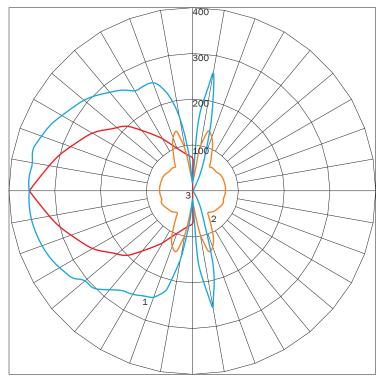

MAXIMUM CANDELA = 359.73 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 105 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD.) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS	1265
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	38
TOTAL LUMINAIRE WATTS	33

KINGSTON GRTM SCONCE

AVAILABLE FINISHES



CO SOLID COPPER



SS STAINLESS STEEL



SN SATIN NICKEL



CH CHROME



BC BLACK CHROME



AC ANTIQUE COPPER



AB ANTIQUE BRASS



SB SATIN BRASS



PB POLISHED BRASS



F04 MATTE WHITE



F05 GLOSS WHITE



F09 PEWTER



F15 MATTE BLACK



F16 GLOSS BLACK



F18 SATIN ALUMINUM



F24 MELTED PLATINUM



F25 MELTED GOLD



F26 MELTED COPPER



F31 SILVER METALLIC



F33 PYRITE BRONZE



RAL CUSTOM COLOR (RAL #)