

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: KG600HS

APPLICATION	<ul style="list-style-type: none"> • WALL MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	<ul style="list-style-type: none"> • 25.5"H OR 37.5"H (65CM, 95CM) • DEPTH: 4.94" (13CM)
ILLUMINATION	<ul style="list-style-type: none"> • DIFFUSE • LED 90CRI • 1,265 LUMENS
ELECTRICAL	<ul style="list-style-type: none"> • 120V, 277V AND 347V • 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none"> • WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	<ul style="list-style-type: none"> • ALUMINUM, SOLID COPPER OR STAINLESS STEEL
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SPECIALTY, SEVERAL TMS PLATED, AND POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0 - 10V STANDARD DIMMING



DIFFUSE

KINGSTON HS™ SCONCE



PROJECT: _____

TYPE: _____

QUANTITY: _____

KG600HS

1 2 3 4 5 6 7 8

1.	I	O
APPLICATION	INDOOR	OUTDOOR

2.	25	37
SIZE	25.5"H X 11.9"W X 5"D (65CM X 30CM X 13CM)	37.5"H X 11.9"W X 5"D (95CM X 30CM X 13CM)

3.	31LED	40LED
ILLUMINATION	31W LED	40W LED
LED (W)	31W	40W
LUMENS	1265	---

4.	30K	35K	40K
LED CCT	3000	3500	4000

5.	120	277	347
VOLTAGE	120V	277V	347V

6.	CO ¹	SS ²	SN ²	CH ²	BC ²	AC ²	AB ²	SB ²	PB ²	F04
FINISH	SOLID COPPER	STAINLESS STEEL	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUÉ COPPER	ANTIQUÉ BRASS	SATIN BRASS	POLISHED BRASS	MATTE WHITE
	F05	F09	F15	F16	F18	F24	F25	F26	F31	F33
	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE
	RAL									
CUSTOM (SPECIFY)										


7.	OP	SD	FPD
DIFFUSER	OPAL - WHITE ACRYLIC	SAND - BLASTED WHITE ACRYLIC	FAUX PERFORATED

8.	---	DIML
DIMMING	NONE	LED DIMMING (0 - 10V, CURRENT - SINKING)


1. A CLEAR COAT IS APPLIED TO COPPER. PATINA WILL FORM OVER TIME
 2. PLATED FINISHES ARE INDOOR APPLICATIONS ONLY

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.


KG600HS - 25"

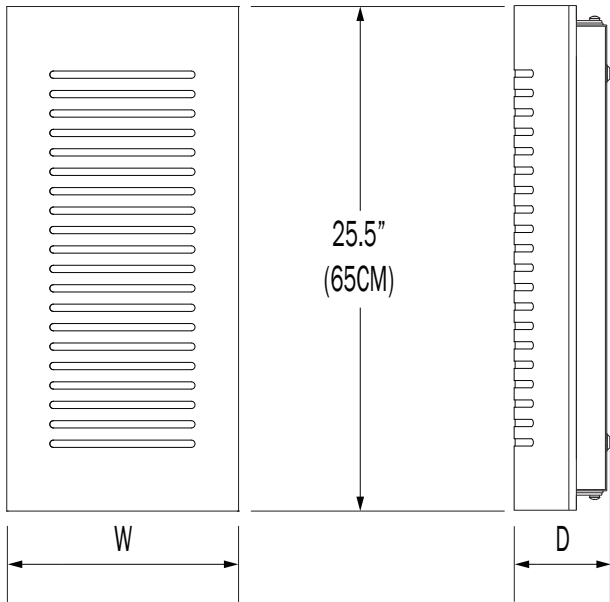

KG600HS - 37"

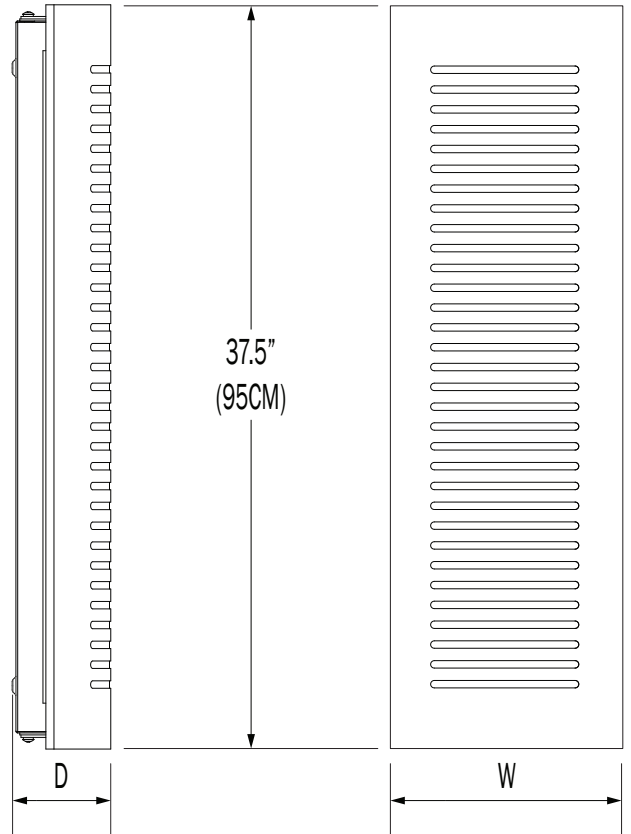

TOP/BOTTOM VIEW (ALL SIZES)

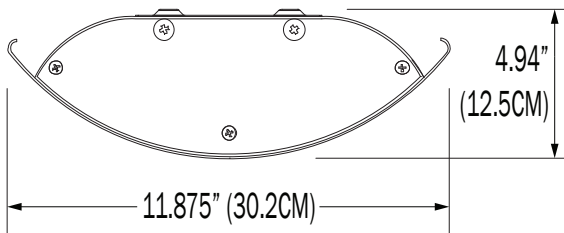


DIFFUSE

PN	ILLUMINATION	LUMENS	WATTAGE
KG600HS	31LED	1265	31

IES INDOOR REPORT

PHOTOMETRIC FILENAME : KG600 HS 25 31LED F05 OP.IES

POLAR GRAPH

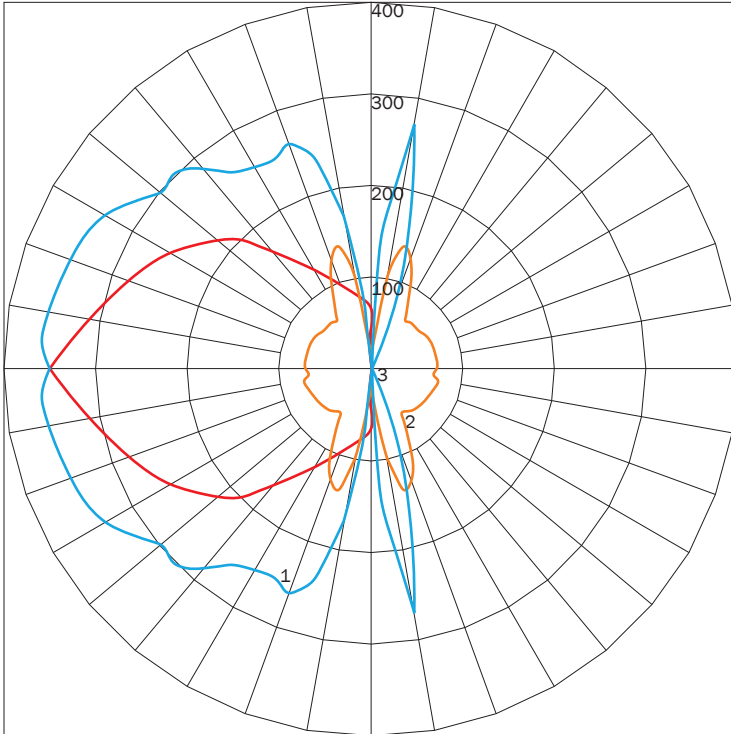

MAXIMUM CANDELA = 359.69 - LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 95
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS	1265
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	38
TOTAL LUMINAIRE WATTS	33

AVAILABLE FINISHES



CO
SOLID
COPPER



SS
STAINLESS
STEEL



SN
SATIN
NICKEL



CH
CHROME



BC
BLACK
CHROME



AC
ANTIQUE
COPPER



AB
ANTIQUE
BRASS



SB
SATIN
BRASS



PB
POLISHED
BRASS



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.