| PROJECT: | |
|----------|--|
| TYPE: | |
| O | |



PN: KG6000W

| APPLICATION | WALL MOUNTINDOOR OR OUTDOOR RATED |
|--------------|---|
| DIMENSION | 25.5"H OR 37.5"H (65CM, 95CM)DEPTH: 4.94" (13CM) |
| ILLUMINATION | DIFFUSELED 90CRI1,265 LUMENS |
| ELECTRICAL | 120V, 277V AND 347V10kA SURGE SUPRESSION STANDARD |
| DIFFUSERS | HIGH EFFICIENCY ACRYLIC |
| MOUNTING | WALL, MOUNTED TO A 4"(10CM) J-BOX |
| CONSTRUCTION | ALUMINUM |
| FINISHES | AVAILABLE IN SPECIALTY, SEVERAL TMS PLATED, AND POWDER COATED FINISHES CUSTOM RAL FINISHES AVAILABLE |
| DIMMING | 0 - 10V STANDARD DIMMING |





PROJECT: _____ TYPE: QUANTITY: _____

| KG6000W | | | | | | | | |
|----------------|---|---|---|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |

| 1. | I | 0 |
|-----------------|-----------------------------------|--|
| APPLICATION | INDOOR | OUTDOOR |
| 2. | 25 | 37 |
| SIZE | 25.5"H X 11.9"W X 5"D (65CM X 30C | M X 13CM) 37.5"H X 11.9"W X 5"D (95CM X 30CM X 13CM) |
| | | |
| 3. | 31LED | 40LED |
| 3. ILLUMINATION | | 40LED 40W LED |
| | | |
| ILLUMINATION | 31W LED | 40W LED |

| 4. | 30K | 35K | 40K |
|---------|------|------|------|
| LED CCT | 3000 | 3500 | 4000 |
| | | | |
| 5. | 120 | 277 | 347 |

| 6. | CO ¹ | SS ² | SN ² | CH ² | BC ² | AC ² | AB ² | SB ² | PB ² | F04 |
|--------|------------------------|--------------------|-----------------|-----------------|-------------------|--------------------|------------------|------------------|--------------------|------------------|
| | SOLID COPPER | STAINLESS STEEL | SATIN NICKEL | CHROME | BLACK CHROME | ANTIQUE COPPER | ANTIQUE BRASS | SATIN BRASS | POLISHED BRASS | MATTE WHITE |
| | F05 | F09 | F15 | F16 | F18 | F24 | F25 | F26 | F31 | F33 |
| FINISH | GLOSS WHITE | PEWTER | MATTE BLACK | GLOSS BLACK | SATIN ALUMINUM | MELTED PLATINUM | MELTED GOLD | MELTED COPPER | SILVER METALLIC | PYRITE BRONZE |
| | RAL | | | | | | | | | |
| | CUSTOM (SPECIFY) | | | | | | | | | |


| 7. | 0P | SD | FPD |
|----------|----------------------|------------------------------|-----------------|
| DIFFUSER | OPAL - WHITE ACRYLIC | SAND - BLASTED WHITE ACRYLIC | FAUX PERFORATED |


| 8. | | DIML |
|---------|------|--|
| DIMMING | NONE | LED DIMMING (0 - 10V, CURRENT-SINKING) |


^{1.} A CLEAR COAT IS APPLIED TO COPPER. PATINA WILL FORM OVER TIME 2. PLATED FINISHES ARE INDOOR APPLICATIONS ONLY

KG6000W - 25"

KG6000W - 37"

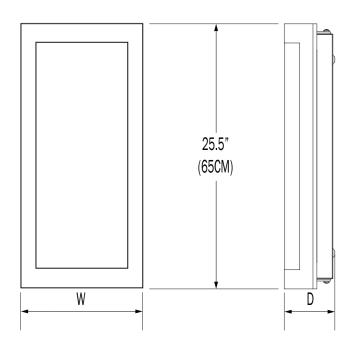

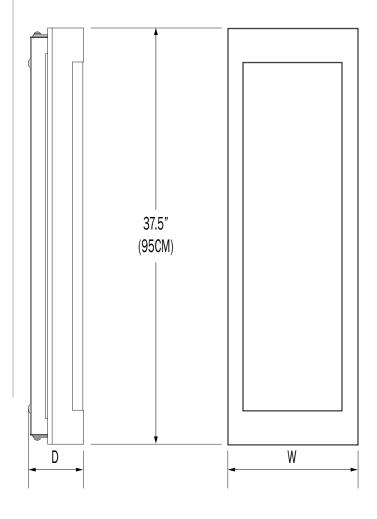

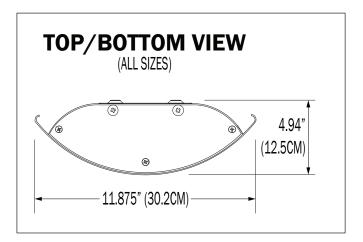


DIFFUSE

| PN | ILLUMINATION | LUMENS | WATTAGE |
|---------|--------------|--------|---------|
| KG6000W | 31LED | 1265 | 31 |

IES INDOOR REPORT

PHOTOMETRIC FILENAME: KG600 OW 25 31LED F05 OP.IES

POLAR GRAPH

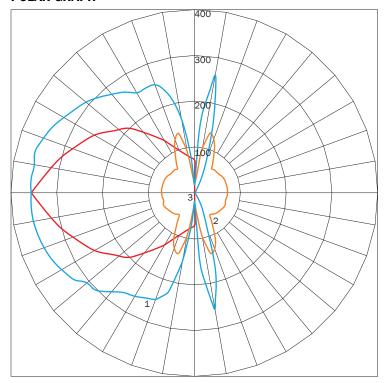

MAXIMUM CANDELA = 359.73 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 105 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD.) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

| LUMINAIRE LUMENS | 1265 |
|----------------------------|------|
| TOTAL LUMINAIRE EFFICIENCY | NA |
| LUMINAIRE EFFICACY RATING | 38 |
| TOTAL LUMINAIRE WATTS | 33 |

AVAILABLE FINISHES



CO SOLID COPPER



SS STAINLESS STEEL



SN SATIN NICKEL



CH CHROME



BC BLACK CHROME



AC ANTIQUE COPPER



AB ANTIQUE BRASS



SB SATIN BRASS



PB POLISHED BRASS



F04 MATTE WHITE



F05 GLOSS WHITE



F09 PEWTER



F15 MATTE BLACK



F16 GLOSS BLACK



F18 SATIN ALUMINUM



F24 MELTED PLATINUM



F25 MELTED GOLD



F26 MELTED COPPER



F31 SILVER METALLIC



F33 PYRITE BRONZE



RAL CUSTOM COLOR (RAL #)