

KLEOS™ B LINEAR

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: 750KLB

APPLICATION	<ul style="list-style-type: none">• PENDANT MOUNT• INDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 48" AND 96" (122CM AND 244CM,)• PROFILE: 1.84"W X 3.6"H (5CM X 9.1CM)
ILLUMINATION	<ul style="list-style-type: none">• DIRECT OR INDIRECT/DIRECT• LED 90CRI• 1,405 - 5,468 LUMENS
DRIVER	<ul style="list-style-type: none">• CANOPY OR REMOTE MOUNT• 120V, 277V, AND UNI (120 - 277V)• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• 96" (244CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING (1%)
WEIGHT	<ul style="list-style-type: none">• 10 LBS MAXIMUM



TMSLIGHTING



KLEOS™ B LINEAR



PROJECT: _____

TYPE: _____

QUANTITY: _____

750KLB

1 2 3 4 5 6 7 8 9



1.	DIRECT							
	48D				96D			
LENGTH	48"(122CM)				96"(244CM)			
LED (W)	19W				38W			
LUMENS	1405				2824			
	INDIRECT/DIRECT							
	48ID				96ID			
LENGTH	48"(122CM)				96"(244CM)			
LED (W)	36W				73W			
LUMENS	2642				5468			
2.	30K		35K			40K		
LED CCT	3000K		3500K			4000K		
3.	120		277			UNI		
VOLTAGE	120V		277V			120 - 277V		
4.	S				D			
CIRCUITS	SINGLE				DUAL			
5.	CD				RM			
DRIVER	CANOPY MOUNT				REMOTE MOUNT			
6.	BC				WC			
CORD	BLACK DROP CORD				WHITE DROP CORD			
7.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F16	F09	F31	F18
FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM
8.	NONE				EMR			
EMERGENCY ¹	---				REMOTE			
9.	NONE				DIML			
DIMMING	---				LED DIMMING (0 - 10V, CURRENT - SINKING)			

1. 10W AT 90 MINUTES

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.


750KLB

RM - REMOTE MOUNT

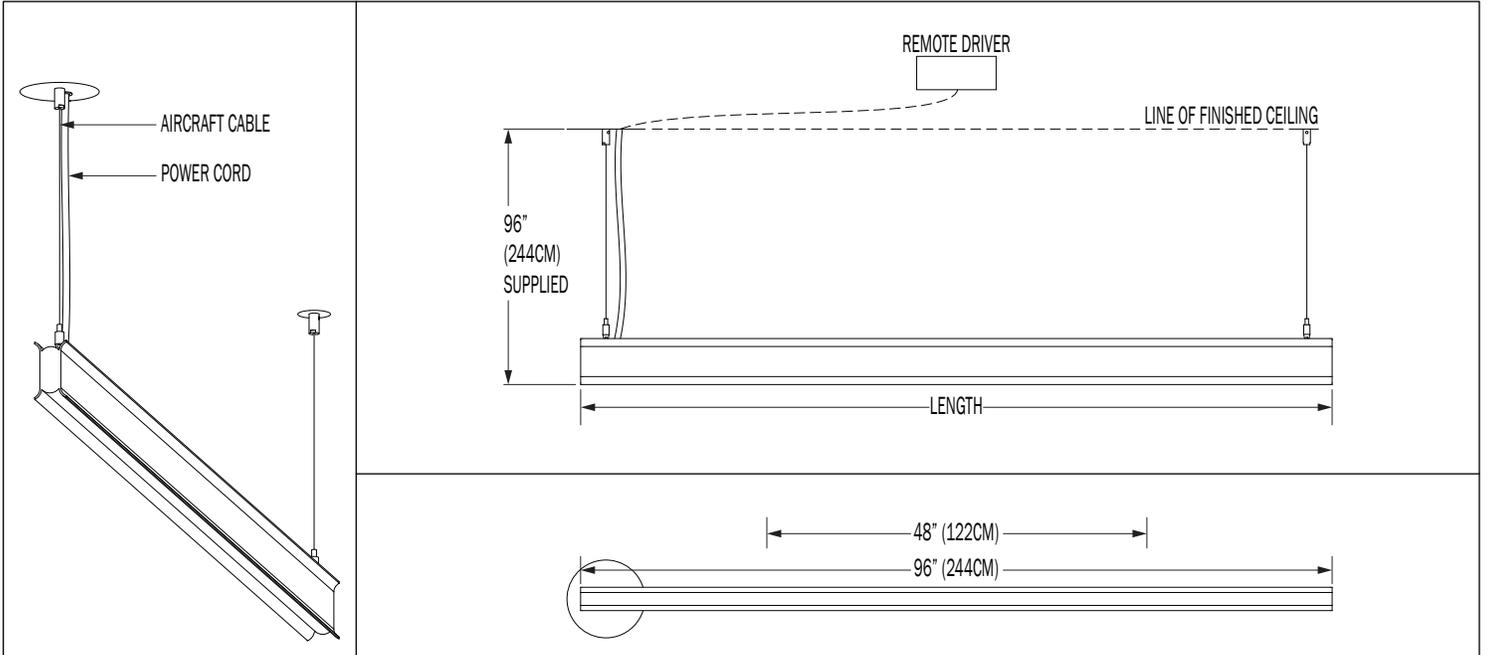

SIZE	LBS
48	6 LBS
96	10 LBS

CD - CANOPY MOUNT

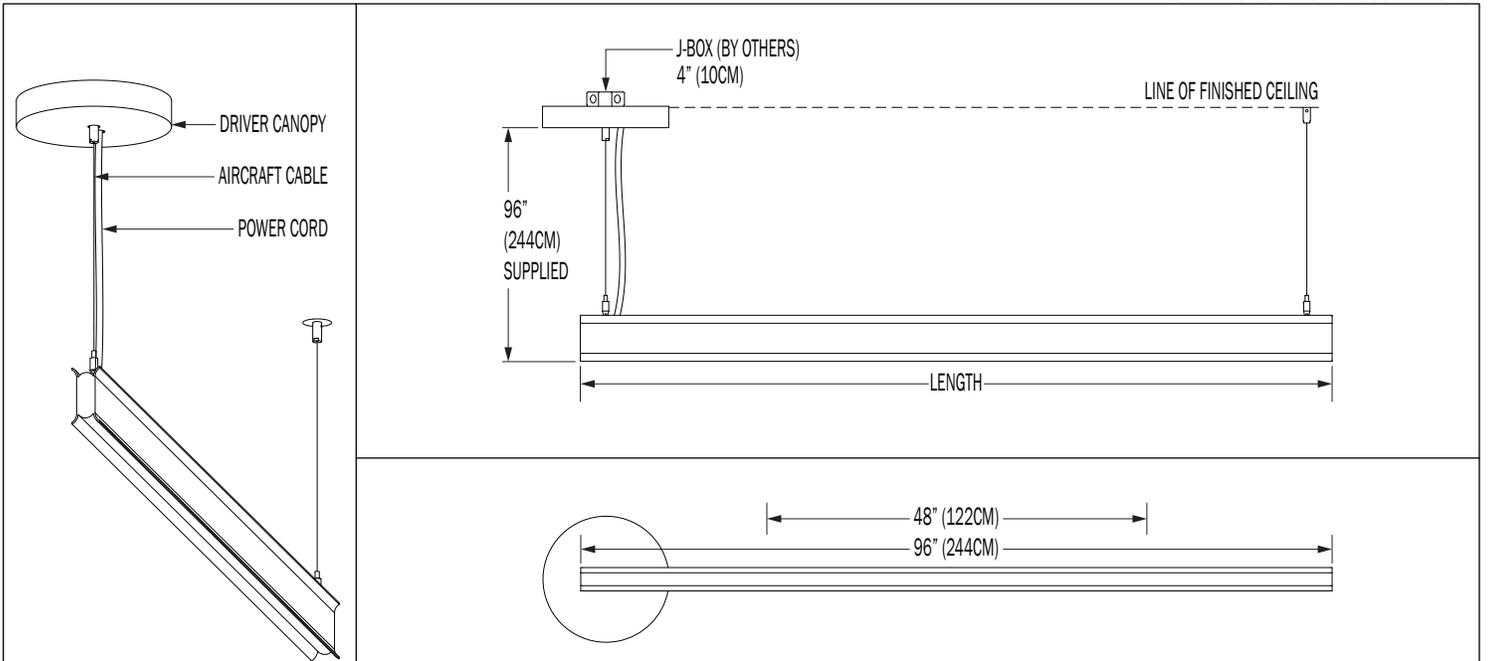


DIRECT

PN	SIZE (DIA)	LUMENS	WATTAGE
750KLB	48D	1405	19
	96D	2824	38

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 750KLB 96D 35K F05.IES

POLAR GRAPH

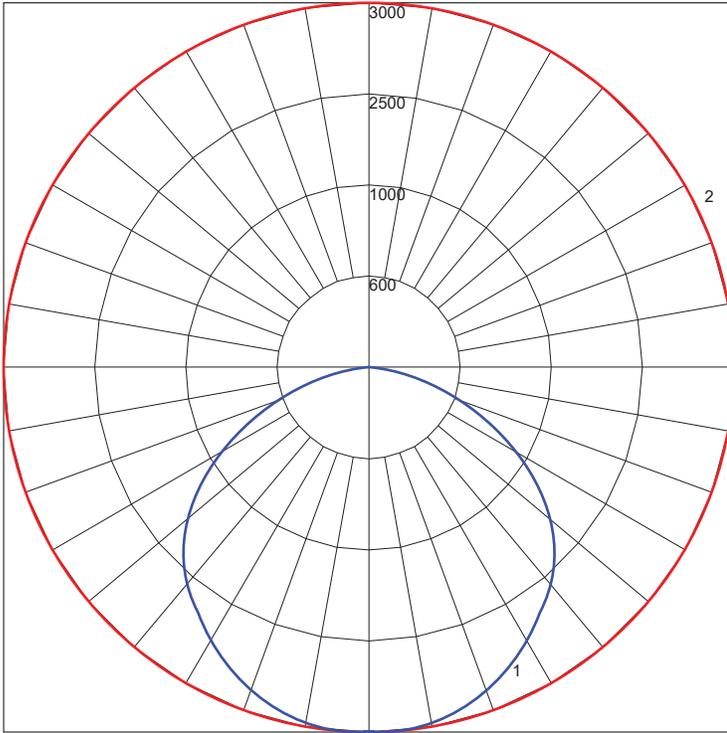

MAXIMUM CANDELA = 1235 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	2824
TOTAL LUMINAIRE EFFICIENCY	100%
LUMINAIRE EFFICACY RATING	74
TOTAL LUMINAIRE WATTS	38


INDIRECT / DIRECT

PN	PN	LUMENS	WATTAGE
750KLB	48ID	2642	36
	96ID	5468	73

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 750KLB 96ID 35K F05.IES

POLAR GRAPH

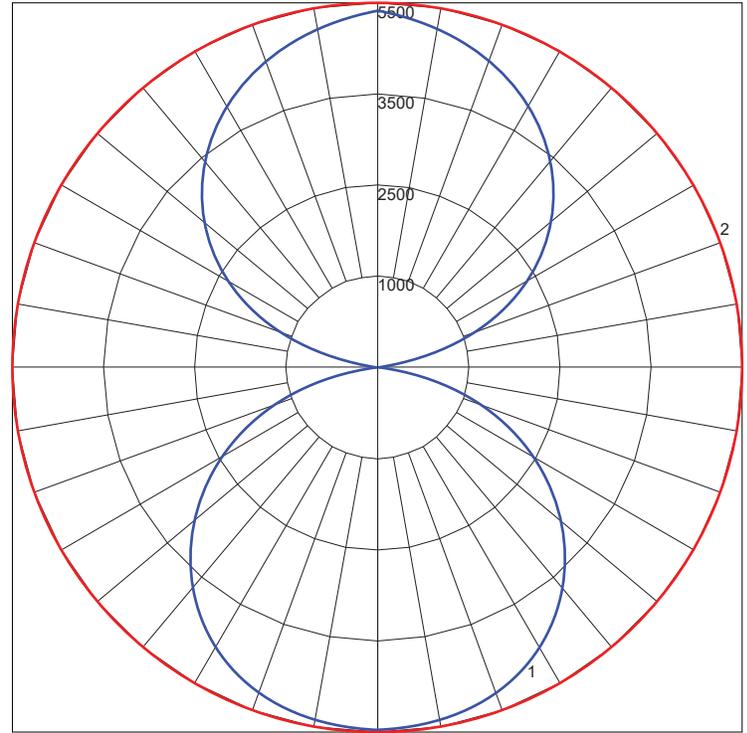


MAXIMUM CANDELA = 1220 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	5468
TOTAL LUMINAIRE EFFICIENCY	100%
LUMINAIRE EFFICACY RATING	75
TOTAL LUMINAIRE WATTS	73

FINISHES



PREMIUM FINISHES

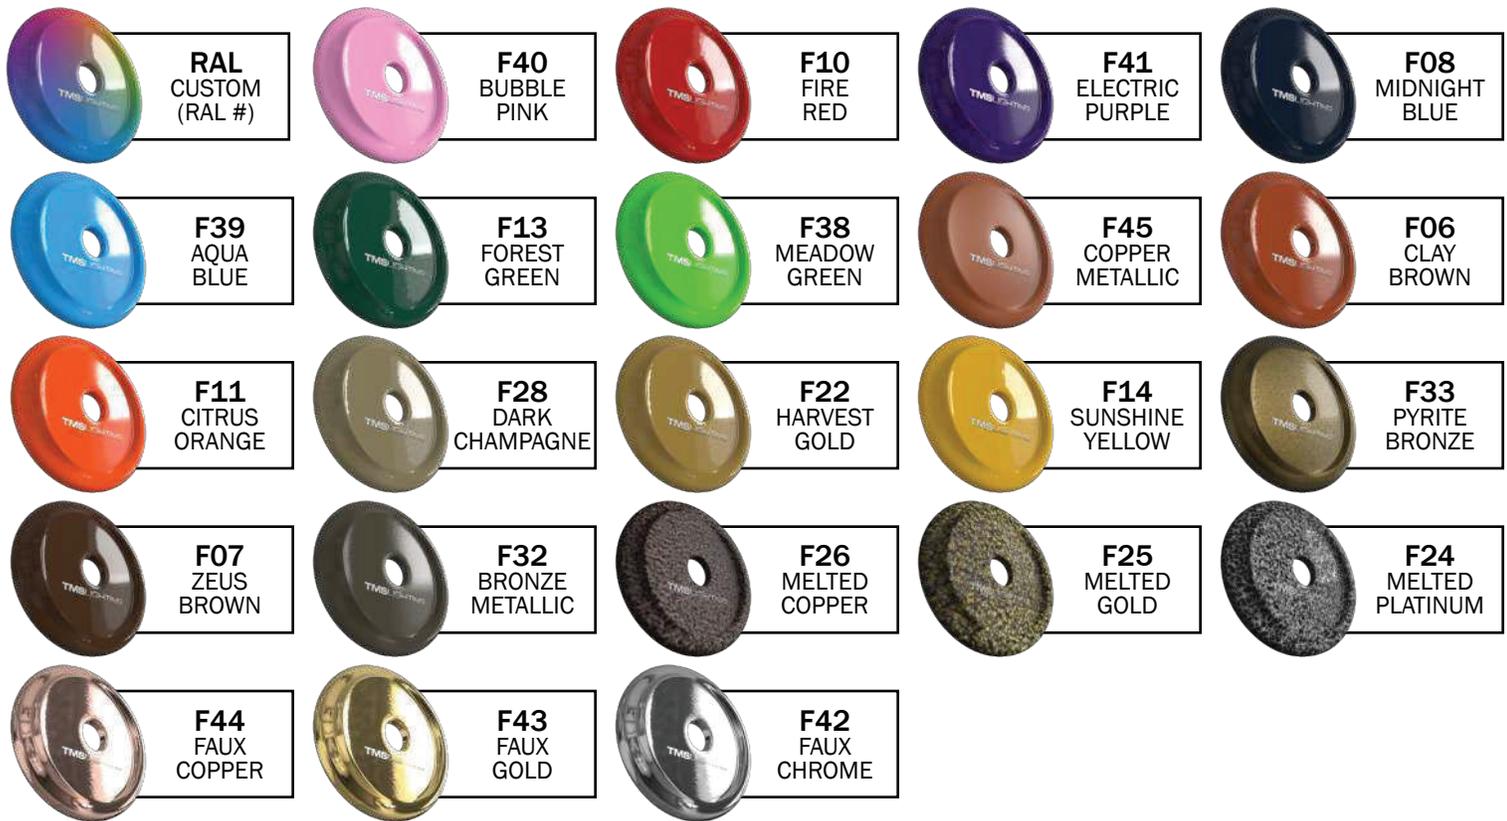

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.