

KLEOS™ PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____




PN: 741KL

APPLICATION	<ul style="list-style-type: none">• PENDANT MOUNT• INDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 48", AND 72" DIAMETERS (122CM, AND 183CM)
ILLUMINATION	<ul style="list-style-type: none">• DIRECT OR INDIRECT/DIRECT• LED 90CRI• 3,920 - 10,840 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120V, 277V, AND UNI (120 - 277V)• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• 96" (244CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING• LUTRON DIMMING OPTIONAL
WEIGHT	<ul style="list-style-type: none">• 21 LBS MAXIMUM



KLEOS™ PENDANT

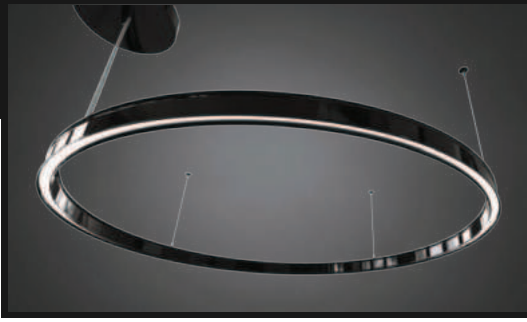

PROJECT: _____
 TYPE: _____
 QUANTITY: _____

741KL

1 2 3 4 5 6 7 8 9


1.	DIRECT									
DIAMETER	48D					72D				
	48"(122CM)					72"(183CM)				
LED (W)	57W					85W				
LUMENS	3920					5880				
	INDIRECT/DIRECT									
DIAMETER	48ID					72ID				
	48"(122CM)					72"(183CM)				
LED (W)	105W					155W				
LUMENS	7390					10840				
2.	30K			35K				40K		
LED CCT	3000			3500				4000		
3.	120			277				UNI		
VOLTAGE	120V			277V				120 - 277V		
4.	S					D				
CIRCUITS	SINGLE					DUAL				
5.	MM					PS				
MOUNTING	MULTIPLE AIRCRAFT CABLES					SINGLE PLATED W/ AIRCRAFT CABLES				
6.	BC					WC				
CORD	BLACK DROP CORD					WHITE DROP CORD				
7.	F04	F05	F09	F15	F16	F18	F21	F31	F33	RAL
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)
8.	NONE			DIML				DIME		
DIMMING	---			LED DIMMING (0 - 10V, CURRENT - SINKING)				LUTRON HI - LUME		
9.	---					EM				
EMERGENCY ¹	NONE					INTEGRAL				

1. 10W AT 90 MINUTES


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

741KL

MM - MULTIPLE AIRCRAFT CABLES

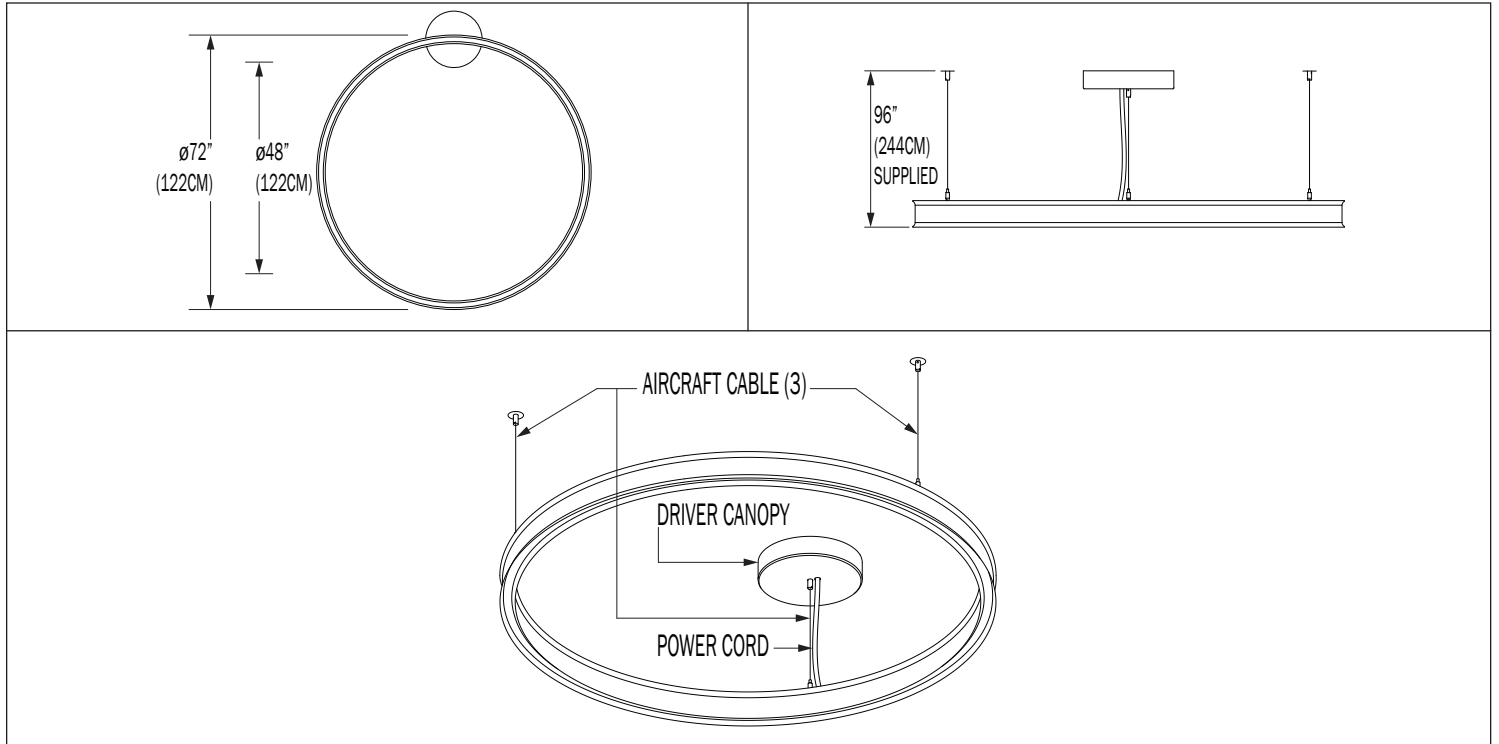

PS - SINGLE PLATE W/ AIRCRAFT CABLES

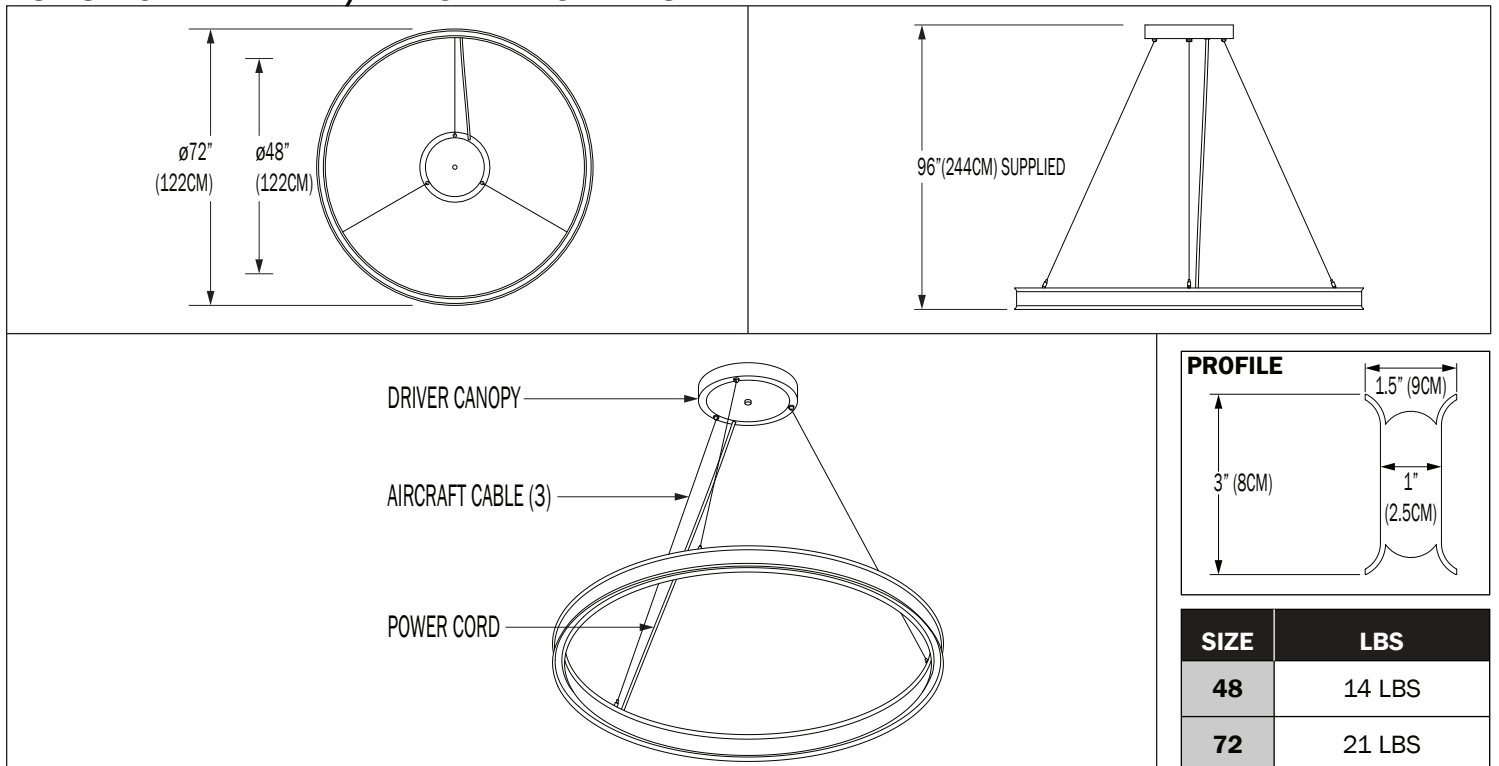


DIRECT

PN	SIZE (DIA)	LUMENS	WATTAGE
741KL	48D	3920	57
	72D	5880	85

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 741KL 72D 35K F05 IES

POLAR GRAPH

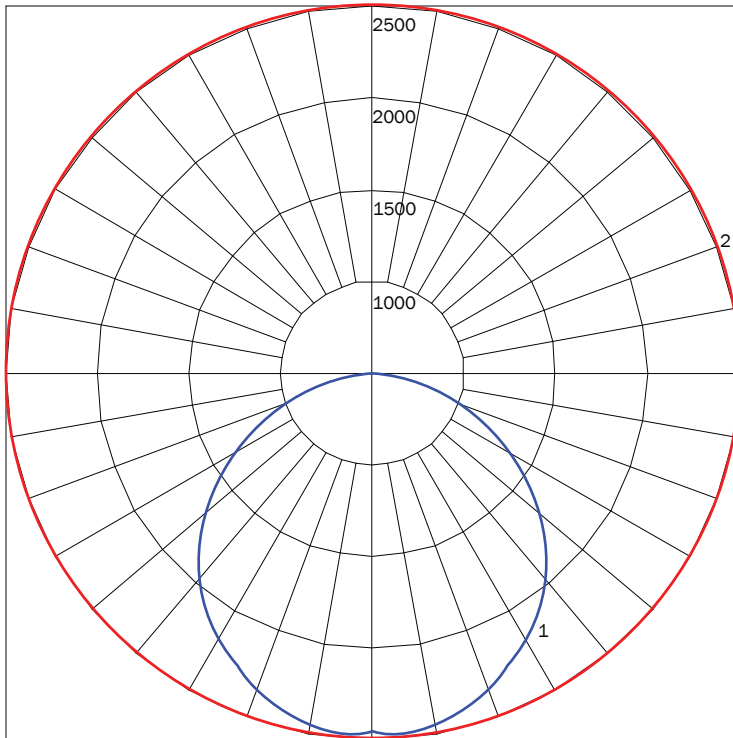

MAXIMUM CANDELA = 2614 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	5880
TOTAL LUMINAIRE EFFICIENCY	100%
LUMINAIRE EFFICACY RATING	69
TOTAL LUMINAIRE WATTS	85


INDIRECT / DIRECT

PN	SIZE (DIA)	LUMENS	WATTAGE
741KL	48ID	7390	105
	72ID	10840	155

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 741KL 72ID 35K F05 IES

POLAR GRAPH

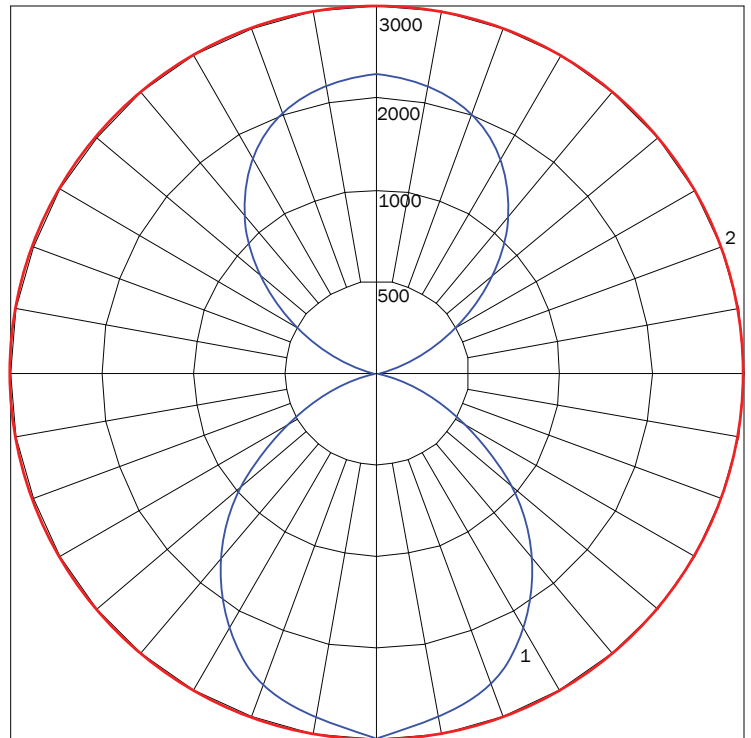

MAXIMUM CANDELA = 2656 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	10840
TOTAL LUMINAIRE EFFICIENCY	100%
LUMINAIRE EFFICACY RATING	70
TOTAL LUMINAIRE WATTS	155

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.