

PROJECT:	
TYPE:	
QUANTITY:	







PN: 941LUSSP

· · · · · · · · · · · · · · · · · · ·	
ILLUMINATION	3,126 - 8,766 LUMENSDIRECT OR INDIRECT/DIRECTLED 90CRI
APPLICATION	DIRECT OR DIRECT/INDIRECT PENDANT MOUNTINDOOR RATED
DIMENSION	 36"AND 48" SIZES (91cm AND 122cm) PROFILE: 1"W X 2.625"H (2.5cm X 6.6cm)
ELECTRICAL	• 120 - 277V • 10KV SURGE SUPRESSION
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	 120" (305cm) BLACK OR WHITE DROP CORD WITH AC CABLES 120" POWER OVER SUSPENSION
LED DRIVER	CANOPY OR REMOTE MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	AVAILABLE IN SEVERAL TMS POWDER COATED FINISHESCUSTOM RAL FINISHES AVAILABLE
DIMMING	 0 - 10V (1%) DIMMING (120-277V) LINE VOLTAGE/TRIAC/ELV (120V ONLY) LUTRON HI-LUME (1%) DIMMING (120-277V)
WEIGHT	• 22 LBS MINIMUM, 29 LBS MAXIMUM











3000K

LUNA BRIOTM PENDANT

PROJECT:	
TYPE:	
QUANTITY:	
Q 0/	

4000K

941LUSSP 3 4 5 6 8 9 10

1.	DIRECT							
SIZE	3	D		4D				
SIZE	36" (9	91CM)			48" (1	22CM)		
LED (W)	34	W			48	3W		
LUMENS	31	26			44	99		
	INDIRECT/DIRECT							
SIZE	3ID			4ID				
SIZE	36" (91CM)			48" (122CM)				
LED (W)	67	'W			97W			
LUMENS	6074				87	66		
2.	Н		М	L		C:1		
OUTPUT	100% LUMENS		75% LUMENS	50% LUMENS		[CUSTOM]% LUMENS		
3.	30К		35K 40i		40K			

4. D CIRCUIT DUAL SINGLE

3500K

5.	MMCD	MMRM	PSCD	PSRM	
MOUNTING	MULTIPLE CABLES WITH CANOPY DRIVER	MULTIPLE CABLES WITH REMOTE DRIVER	SINGLE POINT WITH CANOPY DRIVER	SINGLE POINT WITH REMOTE DRIVER	

6.	BC	wc	POS
CORD	BLACK DROP CORD WITH AIRCRAFT CABLES	WHITE DROP CORD WITH AIRCRAFT CABLES	POWER OVER SUSPENSION (SILVER ONLY) (NOT APPLICABLE FOR MMCD COMBINATION)

7.	FLAT	DOM
DIFFUSER	FLAT DIFFUSER	DOME DIFFUSER

8.	cw		MA	CA	RH	SG	HG	СН
	COCONUT WHITE		MARBLE	CAPPUCCINO	RHINO GREY	STEEL GREY	HEATHER GREY	CHARCOAL
ACOUSTIC COLOR	TA	RR	MT	GG	GA	LB	DO	CG
COLOR	TANGERINE	RUBY RED	MANGO TWIST	GOLF GREEN	GREEN APPLE	LINEN BLUE	DEEP OCEAN	CYBER GRAPE

9.	ADDITIONAL AND PREMIUM FINISHES	F04	F05	F15	F16	F09	F31	F18
FINISH	AVAILABLE. SEE FINISHES CHART	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM


10.	DIML	DIML	
DIMMING	0-10V (1%) (120-277V)	LUTRON HI-LUME (1%) (120-277V)	LINE VOLTAGE/TRIAC/ELV (120V ONLY)


CCT

1. CUSTOM PERCENTAGE I.E. 60%. CONSULT FACTORY.
NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.



LUNA BRIOTM PENDANT

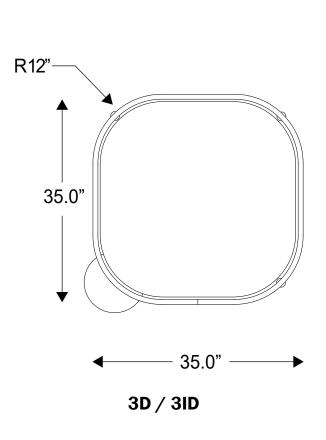

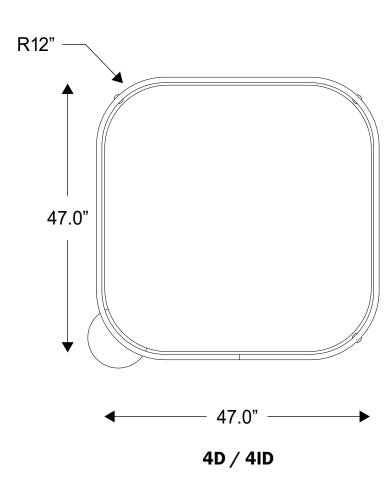


SIZE	ACTUAL	MOUNTING POINTS										MINIMUM DISTANCE ¹²	CANO	PY SIZE ³	NUMBER	WEIGHT	SECTIONS
SIZE	SIZE		WINNINGWI DISTANCE	MMCD	PSCD - PSRM	OF CANOPY	(POUNDS - LBS)	SECTIONS									
36	35"	4	37"	10"	12"	1(D)/ 1(ID)	22	1									
48	47"	4	60"	10"	12"	1(D)/ 1(ID)	29	1									


1. ONLY FOR PS (SINGLE POINT) MOUNTING OPTION, THIS IS THE MINIMUM DISTANCE FROM CEILING TO THE BOTTOM OF THE FIXTURE 2.MINIMUM CABLE MOUNTING ANGLE IS 70° 3. ROUND CANOPY FOR MMCS, SQUARE CANOPY FOR PSCD AND PSRM

POS (POWER OVER SUSPENSION)

MMRM COMBINATION (MUTIPLE CABLES, REMOTE MOUNT DRIVER)

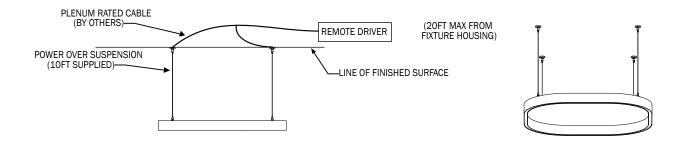


PSCD COMBINATION (SINGLE POINT, CANOPY MOUNT DRIVER)

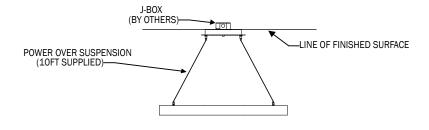




PSRM COMBINATION (SINGLE POINT, REMOTE MOUNT DRIVER)

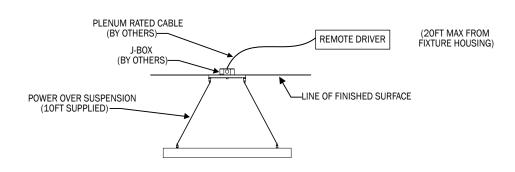





DROP CORD

MMCD COMBINATION (MUTIPLE CABLES, CANOPY MOUNT DRIVER)

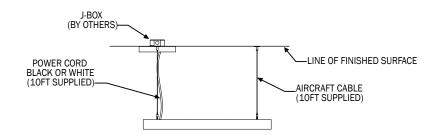




MMRM COMBINATION (MUTIPLE CABLES, REMOTE MOUNT DRIVER)

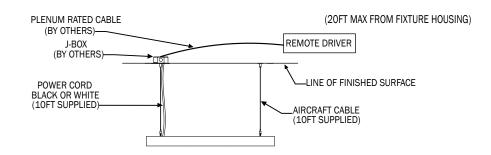




PSCD COMBINATION (SINGLE POINT, CANOPY MOUNT DRIVER)

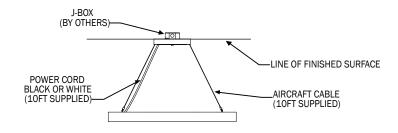



PSRM COMBINATION (SINGLE POINT, REMOTE MOUNT DRIVER)

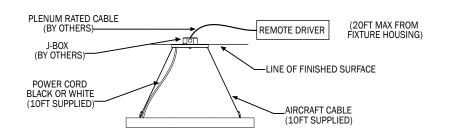




DIRECT

PN	SIZE (L X W)	LUMENS	WATTAGE	WEIGHT
941LUSSCL	3D	3126	34	22 LBS
941103301	4D	4499	48	29 LBS

IES INDOOR REPORT

PHOTOMETRIC FILENAME: 941LUSSP 4D 35K F05.IES

POLAR GRAPH

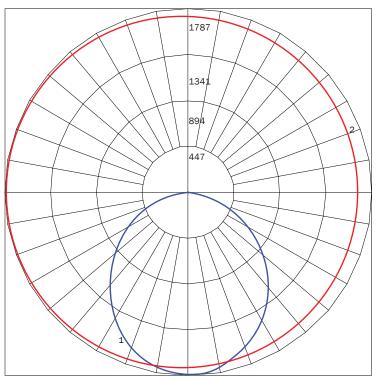

MAXIMUM CANDELA = 1787.39 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 5 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD) # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS


INDIRECT / DIRECT

PN	SIZE (L X W)	LUMENS	WATTAGE	WEIGHT
941LUSSCL	3ID	6074	67	22 LBS
	4ID	8766	97	29 LBS

IES INDOOR REPORT

PHOTOMETRIC FILENAME: 941LUSSP 4ID 35K F05.IES

POLAR GRAPH

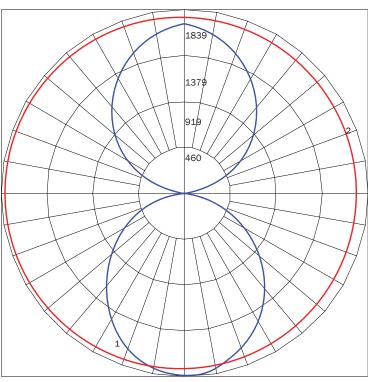

MAXIMUM CANDELA = 1838.81 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 5 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD) # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD)

LUMINAIRE LUMENS	8766
TOTAL LUMINAIRE EFFICIENCY	58%
LUMINAIRE EFFICACY RATING	91
TOTAL LUMINAIRE WATTS	185

FINISHES



F04 MATTE WHITE



F05 GLOSS WHITE



F15 MATTE BLACK



F16 GLOSS BLACK



F09 PEWTER



F31 SILVER METALLIC



F18 SATIN ALUMINUM



F21 ARCH BRONZE

PREMIUM FINISHES



RAL CUSTOM (RAL #)



F40 BUBBLE PINK



F10 FIRE RED



F41 ELECTRIC PURPLE



F08 MIDNIGHT BLUE



F39 AQUA BLUE



F13 FOREST GREEN



F38 MEADOW GREEN



F45 COPPER METALLIC



F06 CLAY BROWN



F11 CITRUS ORANGE



F28 DARK CHAMPAGNE



F22 HARVEST GOLD



F14 SUNSHINE YELLOW



F33 PYRITE BRONZE



F07 ZEUS BROWN



F32 BRONZE METALLIC



F26 MELTED COPPER



F25 MELTED GOLD



F24 MELTED PLATINUM



F44 FAUX COPPER



F43 FAUX GOLD



F42 FAUX CHROME

ACOUSTIC COLORS



NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.