

LUNA QUADRITM CEILING

PROJECT: _____

TYPE: _____


QUANTITY: _____




PN: 941LUCL

ILLUMINATION	• 2,049 - 8,923 LUMENS • DIRECT OR INDIRECT/DIRECT • LED 90CRI
APPLICATION	• DIRECT CEILING • INDOOR RATED
DIMENSION	• AVAILABLE IN LENGTHS RANGING FROM 24" - 84" AND WIDTHS RANGING FROM 12" - 72" • PROFILE: 1"W X 2.625"H (2.54cm X 6.7cm)
ELECTRICAL	• 120 - 277V • 10KV SURGE SUPPRESSION
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• CANOPY OR REMOTE MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V DIMMING (1%)(120-277V) • LINE VOLTAGE/TRIAC/ELV (120V ONLY) • LUTRON HI-LUME (1%)(120-277V)
WEIGHT	• 13 LBS MINIMUM, 51 LBS MAXIMUM

FLAT DIFFUSER



DOM DIFFUSER



TMSLIGHTING

INDOOR





LUNA QUADRI™ CEILING

PROJECT: _____
 TYPE: _____
 QUANTITY: _____

941LUC1 - 1 2 3 4 5 6 7

1.	2L1W	3L1W	3L2W	4L1W	4L2W	4L3W	5L1W	5L2W	5L3W	5L4W	6L1W
L"xW"	24x12	36x12	36x24	48x12	48x24	48x36	60x12	60x24	60x36	60x48	72x12
LED (W)	22	29	37	37	44	51	44	52	59	66	52
LUMENS	2049	2734	3423	3425	4117	4803	4115	4812	5508	6177	4810
PN	6L2W	6L3W	6L4W	6L5W	7L1W	7L2W	7L3W	7L4W	7L5W	7L6W	CUS
L"xW"	72x24	72x36	72x48	72x60	84x12	84x24	84x36	84x48	84x60	84x72	CUSTOM SIZE (SPECIFY LXW)
LED (W)	59	66	74	81	59	66	77	81	88	96	
LUMENS	5509	6173	6854	7548	5487	6200	6877	7551	8234	8923	
2.	H			M			L			C_____	
OUTPUT	100% LUMEN OUTPUT			75% LUMEN OUTPUT			50% LUMEN OUTPUT			[CUSTOM] % LUMEN OUTPUT	
3.	30K			35K				40K			
CCT	3000			3500				4000			
4.	CD					RM					
DRIVER	CANOPY MOUNT					REMOTE MOUNT					
5.	FLAT					DOM					
DIFFUSER	FLAT DIFFUSER					DOME DIFFUSER					
6.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART			F04	F05	F15	F16	F09	F31	F18	
FINISH				MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM	
7.	DIML			DIME				DIMV			
DIMMING	0-10V (1%)(120-277V)			LUTRON HI-LUME (1%)(120-277V) (FOR APPLICABLE SIZES SEE CHART ON PAGE THREE)				LINE VOLTAGE/TRIAC/ELV (1%)(120V ONLY)			

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. **ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.** CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

LUNA QUADRI™ PENDANT


SPECIFICATIONS

CANOPY AND REMOTE SIZING VARIATIONS ¹


SIZE	SIZE	DIME	MOUNTING POINTS	CANOPY SIZE	NUMBER OF CANOPY	WEIGHT (POUNDS - LBS)	SECTIONS
2L1W	12.5" x 24"	YES	4	9"	1	13	1
3L1W	12.5" x 36"	YES	4	9"	1	15	1
3L2W	24.5" x 36"	YES	4	9"	1	17	1
4L1W	12.5" x 48"	YES	4	9"	1	22	1
4L2W	24.5" x 48"	YES	4	9"	1	24	1
4L3W	36.5" x 48"	YES	4	10"	1	26	1
5L1W	12.5" x 60"	YES	4	9"	1	25	1
5L2W	24.5" x 60"	YES	4	10"	1	27	1
5L3W	36.5" x 60"	YES	4	10"	1	33	1
5L4W	48.5" x 60"	NO	4	10"	1	39	1
6L1W	12.5" x 72"	YES	4	10"	1	28	1
6L2W	24.5" x 72"	YES	4	10"	1	30	1
6L3W	36.5" x 72"	NO	4	10"	1	36	1
6L4W	48.5" x 72"	NO	4	10"	1	42	1
6L5W	60.5" x 72"	NO	4	10"	1	45	1
7L1W	12.5" x 84"	YES	4	10"	1	45	1
7L2W	24.5" x 84"	NO	4	10"	1	31	1
7L3W	36.5" x 84"	NO	4	10"	1	35	1
7L4W	48.5" x 84"	NO	4	10"	1	40	1
7L5W	60.5" x 84"	NO	4	10"	1	48	1
7L6W	72.5" x 84"	NO	4	10"	1	51	1

1. THE VISUAL REPRESENTATIONS OF THESE OPTIONS AND THEIR SPECIFICATIONS ARE LISTED ON THE FOLLOWING PAGE FOUR.


LUNA QUADRI™ CEILING




2L1W




3L1W




3L2W




4L1W




4L2W




4L3W




5L1W




5L2W




5L3W




5L4W




6L1W




6L2W




6L3W




6L4W




6L5W




7L1W




7L2W




7L3W



7L4W




7L5W




7L6W

MOUNTING

CANOPY MOUNT DRIVER

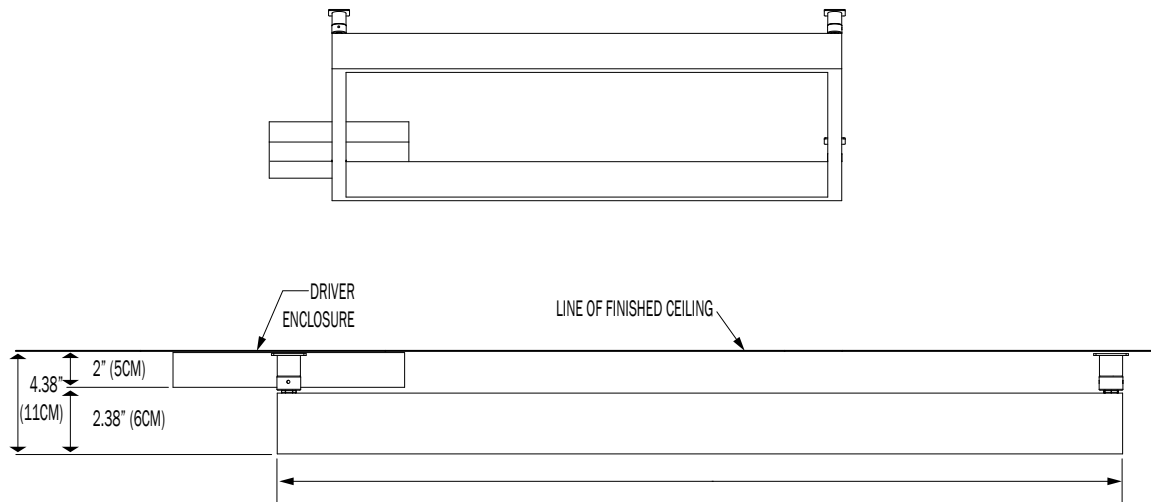

REMOTE MOUNT DRIVER

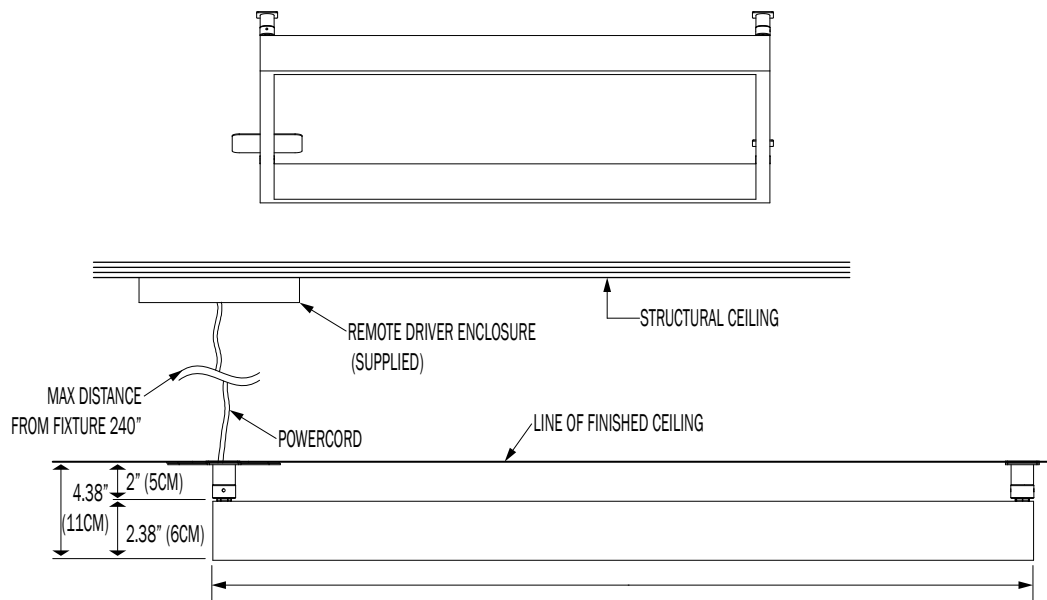


DIRECT

PN (INCH)	LUMENS	WATTAGE
2L1WD	2049	22
3L1WD	2734	29
3L2WD	3423	37
4L1WD	3425	37
4L2WD	4117	44
4L3WD	4803	51
5L1WD	4115	44
5L2WD	4812	52
5L3WD	5508	59
5L4WD	6177	66
6L1WD	4810	52
6L2WD	5509	59
6L3WD	6173	66
6L4WD	6854	74
6L5WD	7548	81
7L1WD	5487	59
7L2WD	6200	66
7L3WD	6877	77
7L4WD	7551	81
7L5WD	8234	88
7L6WD	8923	96

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 941LURCL L2W1D 35K F05.IES

POLAR GRAPH

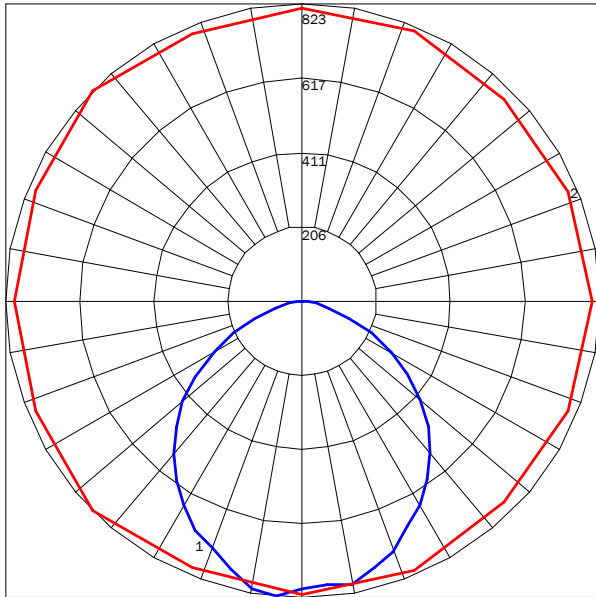


MAXIMUM CANDELA = 822.85 LOCATED AT HORIZONTAL ANGLE = 135, VERTICAL ANGLE = 5
1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (135 - 315) (THROUGH MAX. CD.)
2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 2049
TOTAL LUMINAIRE EFFICIENCY 60%
LUMINAIRE EFFECIENCY RATING 93
TOTAL LUMINAIRE WATTS 22

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 941LURCL L7W6D 35K F05.IES

POLAR GRAPH

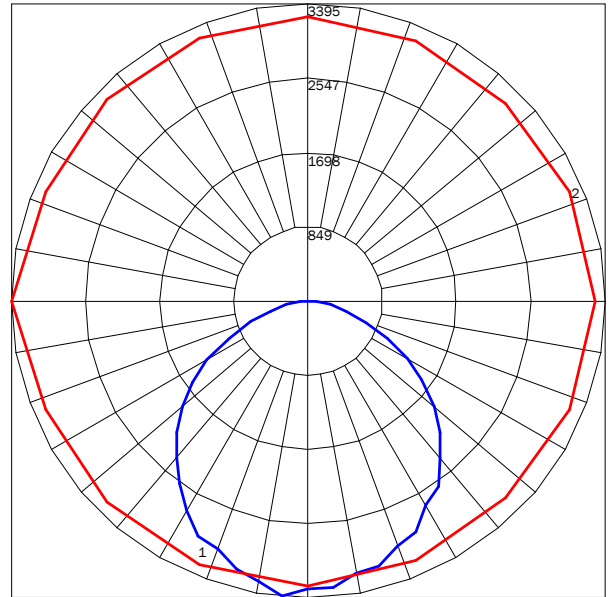


MAXIMUM CANDELA = 3395.47 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 5
1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) (THROUGH MAX. CD.)
2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 8923
TOTAL LUMINAIRE EFFICIENCY 60%
LUMINAIRE EFFECIENCY RATING 93
TOTAL LUMINAIRE WATTS 96

LUNA QUADRI™ CEILING

FINISHES

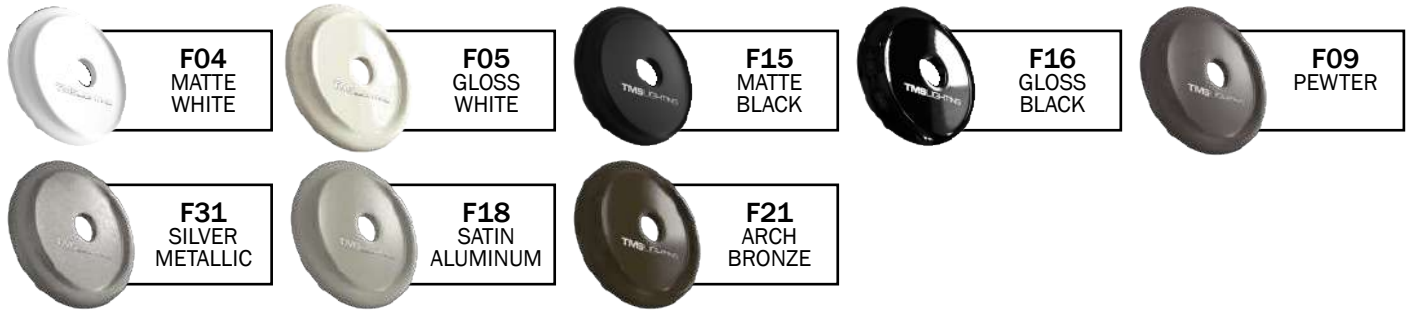

PREMIUM FINISHES



NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. **ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.** CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING

