


LUNA TRIO™ CEILING

PROJECT: _____

TYPE: _____

QUANTITY: _____

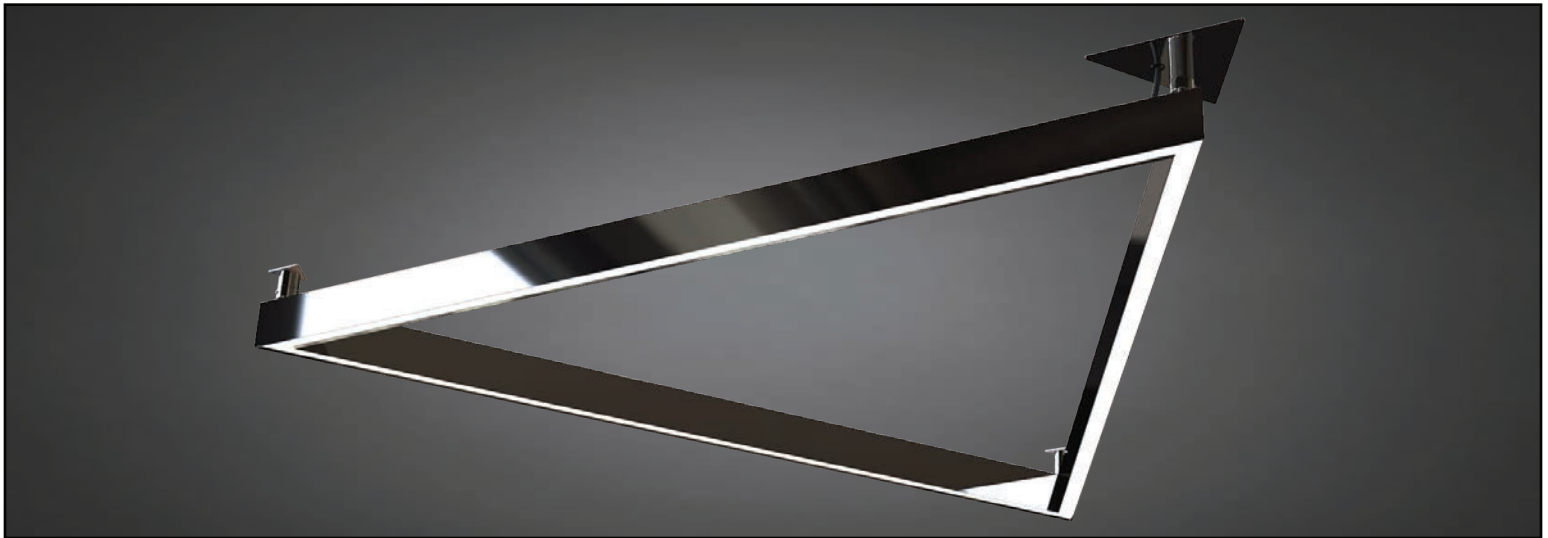


PN: 941LUTCL

| | |
|---------------------|--|
| APPLICATION | <ul style="list-style-type: none">• CEILING• INDOOR RATED |
| DIMENSION | <ul style="list-style-type: none">• 25", 37", 48", 60", 72", 84" (64CM, 94CM, 122CM, 152CM, 183CM, 213CM)• PROFILE: 1" W X 2.38"H (2.5CM X 6CM) |
| ILLUMINATION | <ul style="list-style-type: none">• DIRECT• LED 90CRI• 5,372 - 10,743 LUMENS |
| ELECTRICAL | <ul style="list-style-type: none">• 120 - 277V• 10KA SURGE SUPPRESSION STANDARD |
| DIFFUSERS | <ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC |
| MOUNTING | <ul style="list-style-type: none">• CANOPY OR REMOTE MOUNTED DRIVERS |
| CONSTRUCTION | <ul style="list-style-type: none">• ALUMINUM |
| FINISHES | <ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE |
| DIMMING | <ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING (1%)• LUTRON (1%) DIMMING OPTIONAL |
| WEIGHT | <ul style="list-style-type: none">• 45 LBS MAXIMUM |



DIRECT

LUNA TRIO™ CEILING

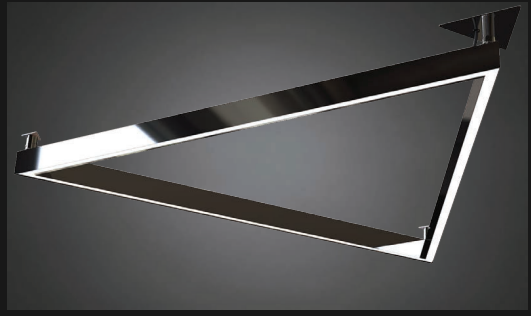

PROJECT: _____

TYPE: _____

QUANTITY: _____

941LUTCL

1 2 3 4 5 6 7

| 1. | 2D | 3D | 4D | 5D | 6D | 7D |
|----------------|------------|------------|-------------|-------------|-------------|-------------|
| LENGTH (L X W) | 25" (64CM) | 37" (94CM) | 48" (122CM) | 60" (152CM) | 72" (183CM) | 84" (213CM) |
| LED (W) | 34W | 51W | 68W | 85W | 102W | 118W |
| LUMENS | 3101 | 4608 | 6158 | 7766 | 9270 | 10743 |

| 2. | H | M | L | C: _____ ¹ |
|--------|-------------|------------|------------|-----------------------|
| OUTPUT | 100% LUMENS | 75% LUMENS | 50% LUMENS | [CUSTOM]% LUMENS |

| 3. | 30K | 35K | 40K |
|---------|------|------|------|
| LED CCT | 3000 | 3500 | 4000 |

| 4. | 120 | 277 | UNI |
|---------|------|------|------------|
| VOLTAGE | 120V | 277V | 120 - 277V |

| 5. | CD | RM |
|--------|--------------|--------------|
| DRIVER | CANOPY MOUNT | REMOTE MOUNT |

| 6. | F04 | F05 | F09 | F15 | F16 | F18 | F21 | F31 | F33 | RAL |
|--------|-------------|-------------|--------|-------------|-------------|----------------|-------------|-----------------|---------------|------------------|
| FINISH | MATTE WHITE | GLOSS WHITE | PEWTER | MATTE BLACK | GLOSS BLACK | SATIN ALUMINUM | ARCH BRONZE | SILVER METALLIC | PYRITE BRONZE | CUSTOM (SPECIFY) |


| 7. | DIML | DIME |
|---------|--|----------------------------------|
| DIMMING | LED DIMMING (0 - 10V, CURRENT - SINKING) | LUTRON HI - LUME 1% ² |

1. CUSTOM PERCENTAGE I.E. 60%. CONSULT FACTORY.
 2. DIAMETERS LARGER THAN 6FT (1.8M) ARE INCOMPATIBLE WITH LUTRON DIMMING


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

971LUTCL


CANOPY MOUNT

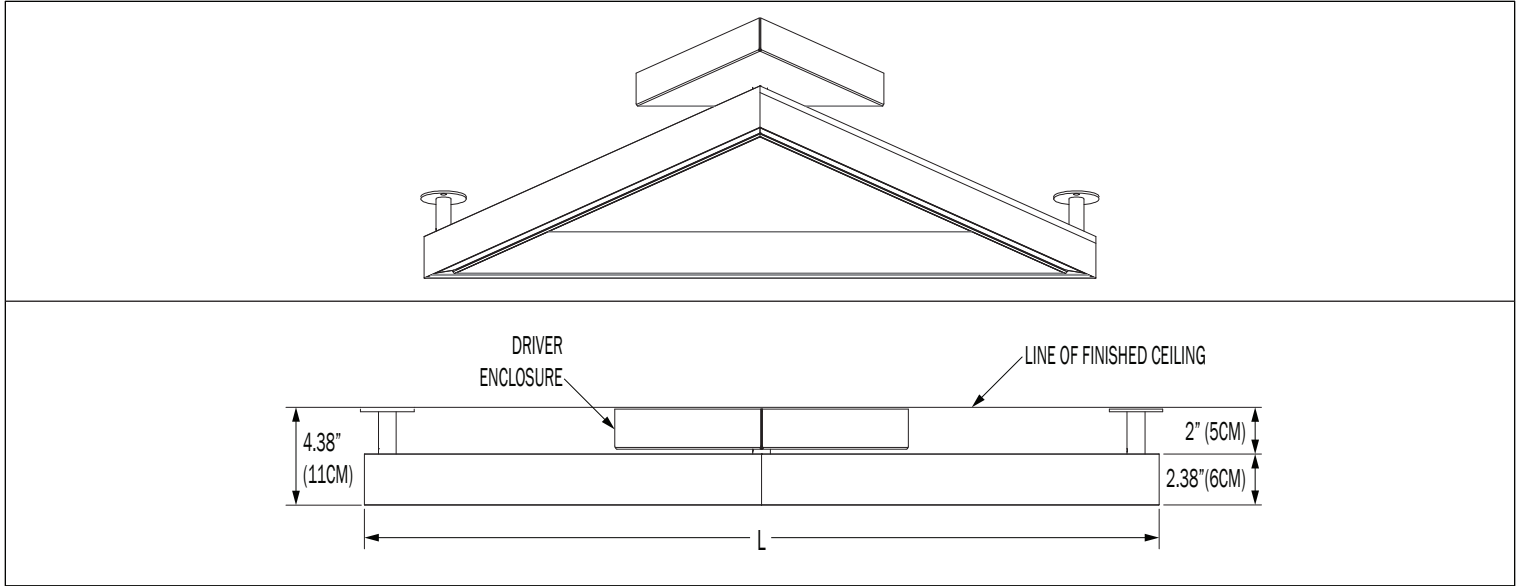

REMOTE MOUNT

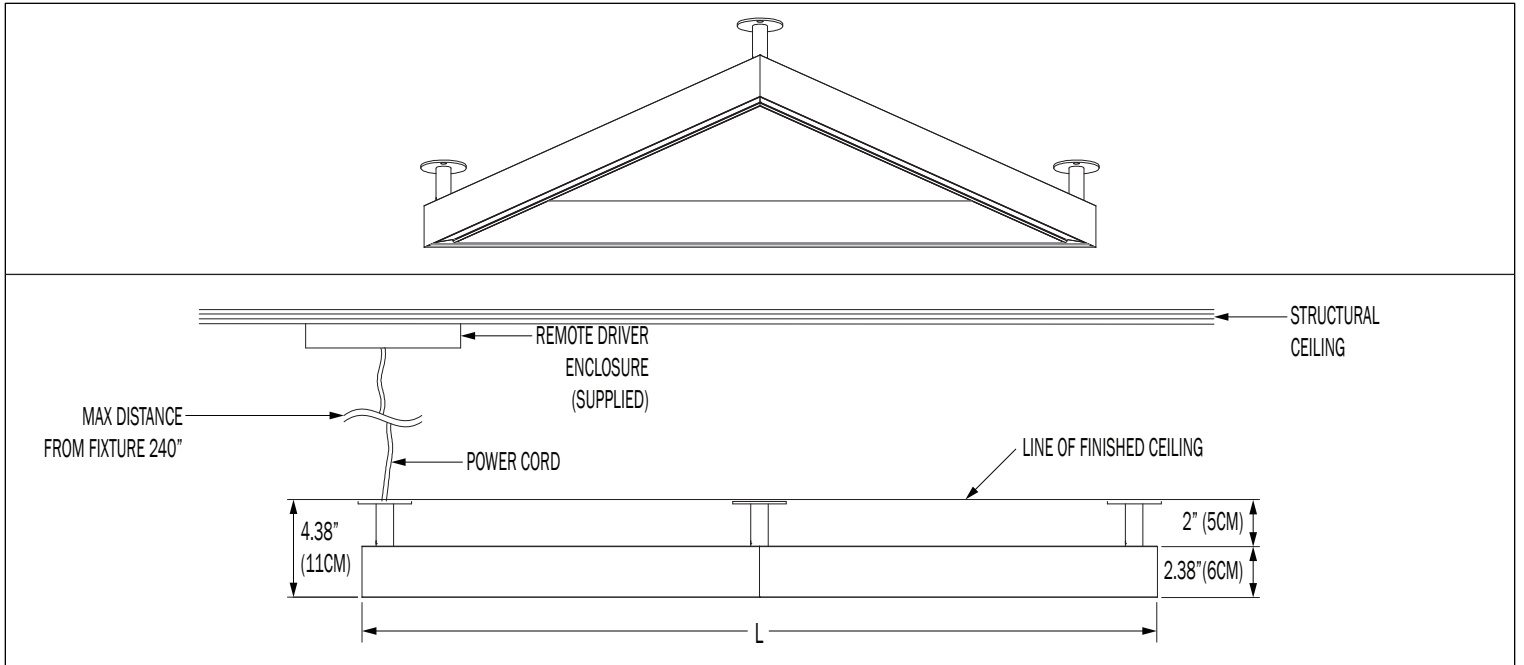

| SIZE (LENGTH) | SECTION | WEIGHT (LBS) |
|---------------|---------|--------------|
| 25" (64CM) | 1 | 15 |
| 36" (91CM) | 1 | 20 |
| 48" (122CM) | 1 | 28 |
| 60" (152CM) | 1 | 34 |
| 72" (183CM) | 1 | 39 |
| 84" (213CM) | 1 | 45 |

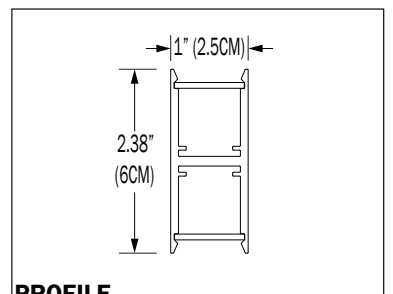


DIRECT

| PN | SIZE (LENGTH) | LUMENS | WATTAGE |
|----------|---------------|--------|---------|
| 941LUTCL | 2D | 3101 | 34 |
| | 3D | 4608 | 51 |
| | 4D | 6158 | 68 |
| | 5D | 7766 | 85 |
| | 6D | 9270 | 102 |
| | 7D | 10743 | 118 |

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 941LUTCL 2D 35K F05.IES

POLAR GRAPH

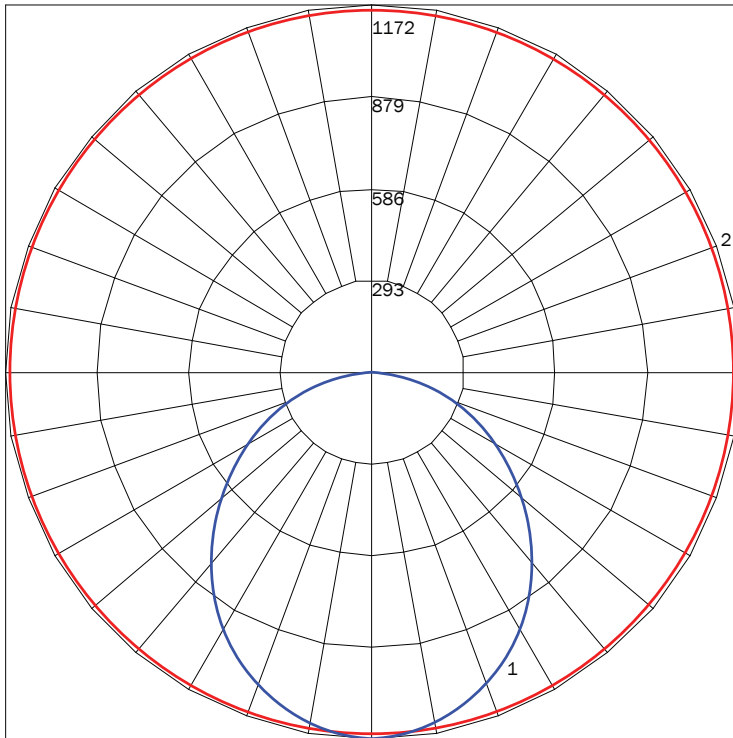


MAXIMUM CANDELA = 1172.49 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 3101
TOTAL LUMINAIRE EFFICIENCY 72%
LUMINAIRE EFFICACY RATING 92
TOTAL LUMINAIRE WATTS 34

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 941LUTCL 7D 35K F05.IES

POLAR GRAPH

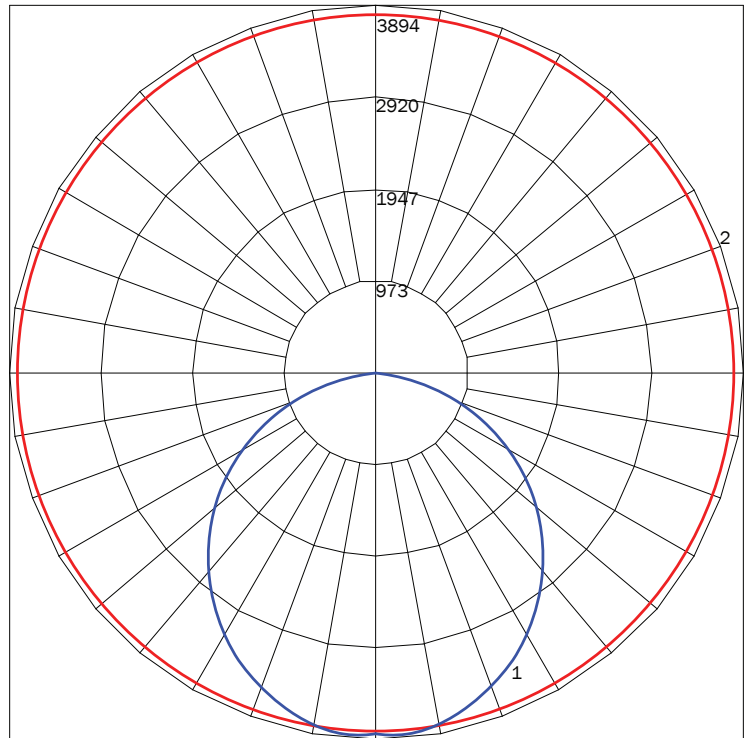

MAXIMUM CANDELA = 3893.9 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 10743
TOTAL LUMINAIRE EFFICIENCY 71%
LUMINAIRE EFFICACY RATING 91
TOTAL LUMINAIRE WATTS 118

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.