


LUNA TRIO™ PENDANT

PROJECT: _____

TYPE: _____


QUANTITY: _____

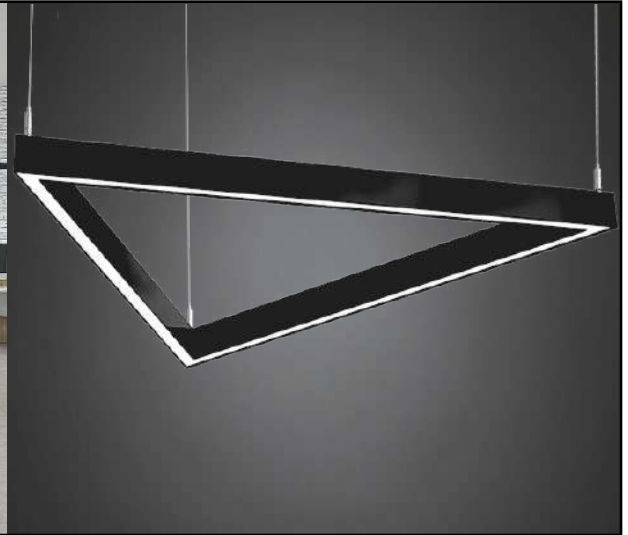



PN: 941LUTP

ILLUMINATION	<ul style="list-style-type: none"> • 2695 - 18850 LUMENS • DIRECT OR INDIRECT/DIRECT • LED 90CRI
APPLICATION	<ul style="list-style-type: none"> • DIRECT OR DIRECT/INDIRECT PENDANT MOUNT • INDOOR RATED
DIMENSION	<ul style="list-style-type: none"> • 25", 37", 48", 60", 72", 84" SIZE (64cm, 94cm, 122cm, 153cm, 183cm, 213cm) • PROFILE: 1"W X 2.625"H (2.5cm X 6.6cm)
ELECTRICAL	<ul style="list-style-type: none"> • 120 - 277V • 10KV SURGE SUPPRESSION
DIFFUSERS	<ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none"> • 120" (305cm) BLACK OR WHITE DROP CORD WITH AC CABLES • 120" POWER OVER SUSPENSION
LED DRIVER	<ul style="list-style-type: none"> • CANOPY OR REMOTE MOUNT
CONSTRUCTION	<ul style="list-style-type: none"> • ALUMINUM
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0 - 10V (1%) DIMMING (120-277V) • LINE VOLTAGE/TRIAC/ELV (120V ONLY) • LUTRON HI-LUME (1%) DIMMING (120-277V)
WEIGHT	<ul style="list-style-type: none"> • 11 LBS MINIMUM, 47 LBS MAXIMUM


FLAT DIFFUSER

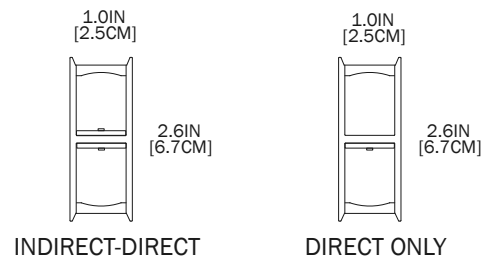

DOM DIFFUSER

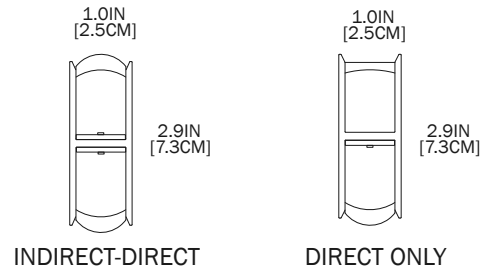

LUNA TRIO™ PENDANT

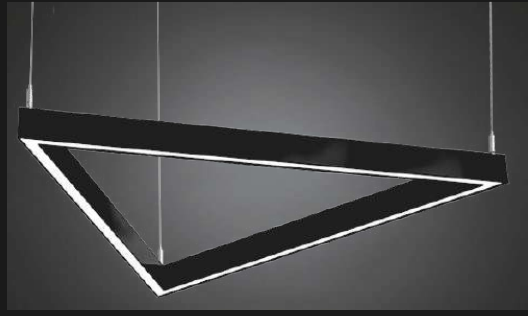

PROJECT: _____

TYPE: _____

QUANTITY: _____


941LUTP

1 2 3 4 5 6 7 8 9


1.	DIRECT							
LENGTH	2D	3D	4D	5D	6D	7D		
	25" (63cm)	37" (94cm)	48" (122cm)	60" (152cm)	72" (183cm)	84" (213cm)		
LED (W)	28W	40W	54W	71W	83W	101W		
LUMENS	2695	3845	5200	6930	8085	9425		
	INDIRECT/DIRECT							
LENGTH	2ID	3ID	4ID	5ID	6ID	7ID		
	25" (63cm)	37" (94cm)	48" (122cm)	60" (152cm)	72" (183cm)	84" (213cm)		
LED (W)	58W	75W	119W	146W	170W	196W		
LUMENS	3793	7690	10400	13860	16170	18850		
2.	H	M	L	C: _____				
OUTPUT	100% LUMENS	75% LUMENS	50% LUMENS	[CUSTOM]% LUMENS				
3.	30K		35K		40K			
CCT	3000		3500		4000			
4.	S			D				
CIRCUITS	SINGLE			DUAL				
5.	MMCD	MMRM	PSCD	PSRM				
MOUNTING	MULTIPLE CABLES WITH CANOPY DRIVER	MULTIPLE CABLES WITH REMOTE DRIVER	SINGLE POINT WITH CANOPY DRIVER	SINGLE POINT WITH REMOTE DRIVER				
6.	BC		WC		POS			
CORD	BLACK DROP CORD WITH AIRCRAFT CABLES		WHITE DROP CORD WITH AIRCRAFT CABLES		POWER OVER SUSPENSION (SILVER ONLY) <small>(UP TO 48" ONLY) (NOT APPLICABLE FOR MMCD COMBINATION)</small>			
7.	FLAT			DOM				
DIFFUSER	FLAT DIFFUSER			DOME DIFFUSER				
8.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F16	F09	F31	F18
FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM
9.	DIML		DIME		DIMV			
DIMMING	0-10V (1%) (120-277V)		LUTRON HI-LUME (1%) (120-277V) <small>(UP TO 48" ONLY)</small>		LINE VOLTAGE/TRIAC/ELV (120V ONLY)			

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.


LUNA TRIO™ PENDANT




2D / 2ID

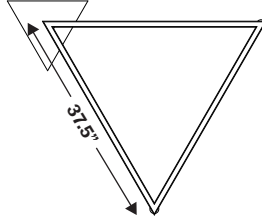


3D / 3ID




4D / 4ID

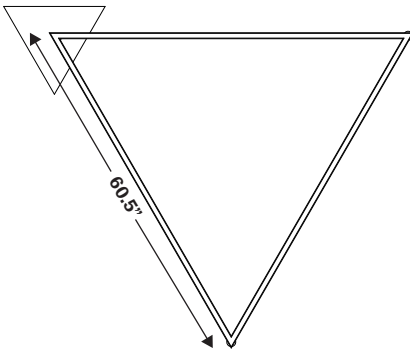

5D / 5ID

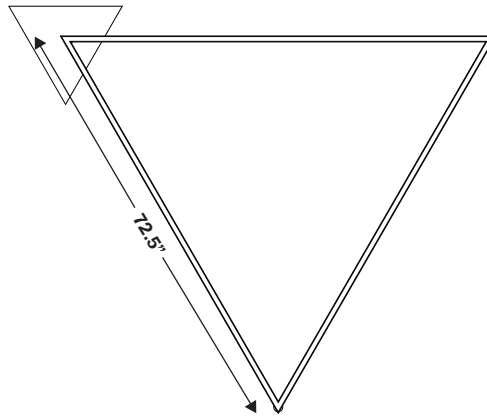

6D / 6ID

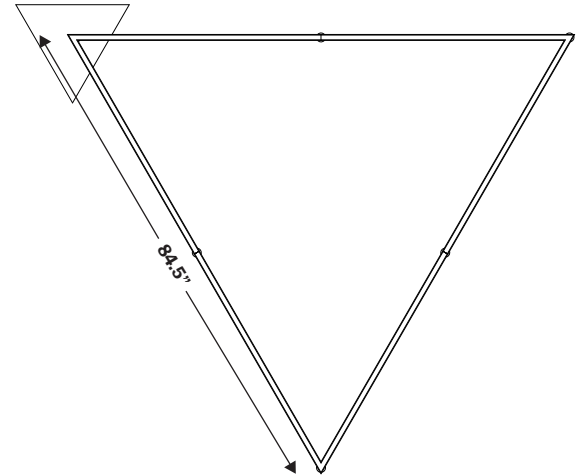



7D / 7ID

SIZE	FULL SIZE	MOUNTING POINT	MINIMUM DISTANCE ^{1,2}	CANOPY SIZE		NUMBER OF CANOPY	WEIGHT (POUNDS - LBS)	SECTIONS
				MMCD	PSCD - PSRM			
25	25.5"	3	22"	8.5"	13.5"	1(D)/ 1(ID)	11(D)/ 15(ID)	1
37	37.5"	3	35"	13.5"	17"	1(D)/ 1(ID)	16(D)/ 23(ID)	1
48	48.5"	3	53"	13.5"	17"	1(D)/ 1(ID)	20(D)/ 27(ID)	1
60	60.5"	3	69"	17"	19"	1(D)/ 1(ID)	25(D)/ 36(ID)	1
72	72.5"	3	88"	19"	19"	1(D)/ 1(ID)	30(D)/ 41(ID)	1
84	84.5"	6	N/A	19"	N/A"	1(D)/ 1(ID)	35(D)/ 46(ID)	3



1. ONLY FOR PSCD AND PSRM (SINGLE POINT) MOUNTING OPTIONS, THIS IS THE MINIMUM DISTANCE FROM CEILING TO THE BOTTOM OF THE FIXTURE
 2. MINIMUM CABLE MOUNTING ANGLE IS 70°

POS (POWER OVER SUSPENSION)



MMRM COMBINATION (MULTIPLE CABLES, REMOTE MOUNT DRIVER)

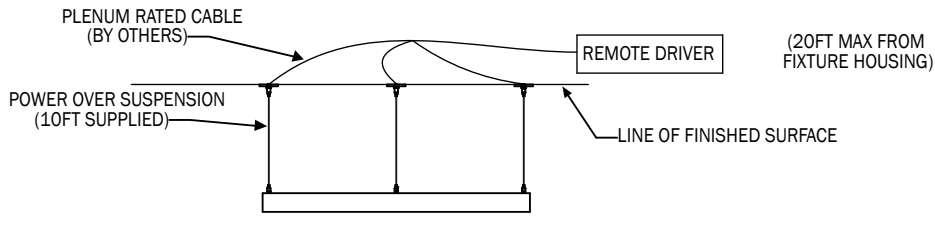

PSCD COMBINATION (SINGLE POINT, CANOPY MOUNT DRIVER)


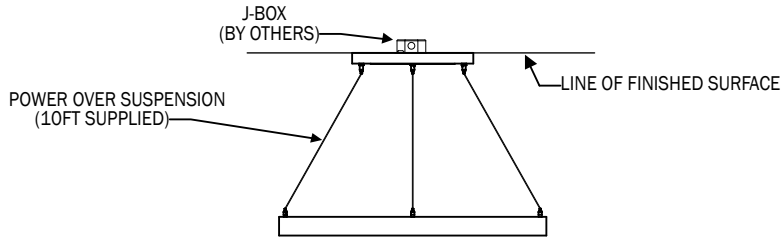


PSRM COMBINATION (SINGLE POINT, REMOTE MOUNT DRIVER)


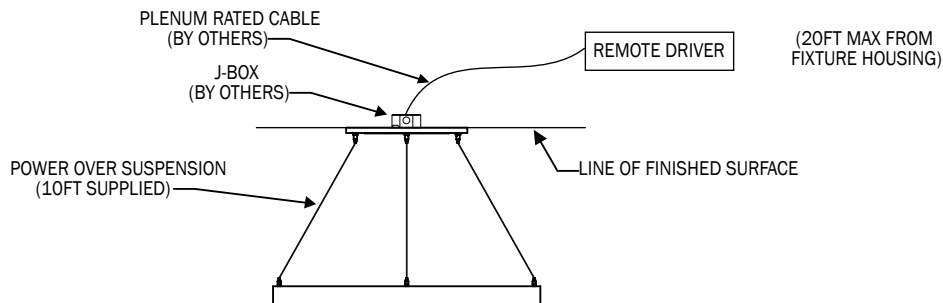


DROP CORD



MMCD COMBINATION (MUTIPLE CABLES, CANOPY MOUNT DRIVER)

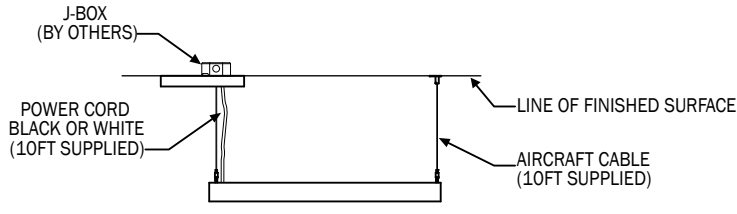



MMRM COMBINATION (MUTIPLE CABLES, REMOTE MOUNT DRIVER)

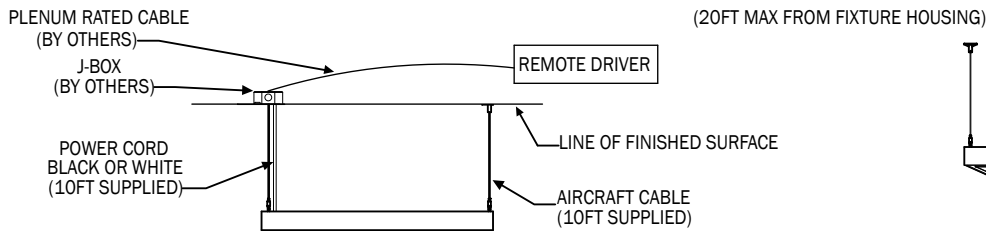

PSCD COMBINATION (SINGLE POINT, CANOPY MOUNT DRIVER)

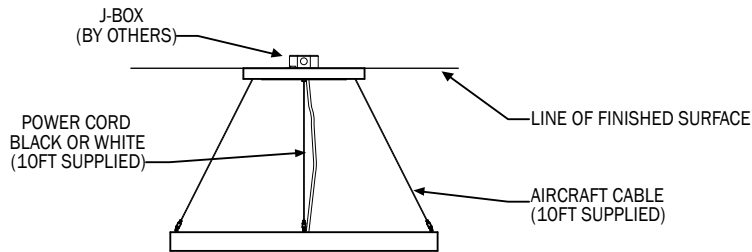

PSRM COMBINATION (SINGLE POINT, REMOTE MOUNT DRIVER)

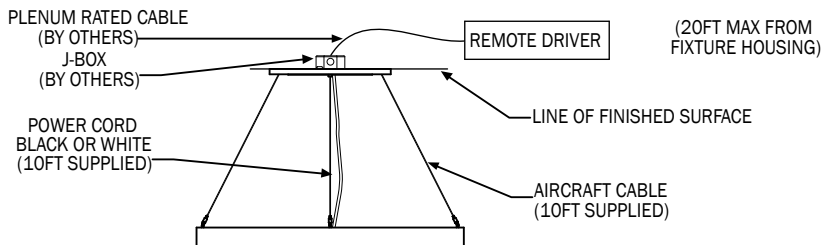

DIRECT

PN	SIZE (LXW)	LUMENS	WATTAGE
941LUTP	2D	2695	28
	3D	3845	40
	4D	5200	54
	5D	6930	71
	6D	8085	83
	7D	9425	196


INDIRECT / DIRECT

PN	SIZE (LXW)	LUMENS	WATTAGE
941LUTP	2ID	3793	58
	3ID	7690	75
	4ID	10400	119
	5ID	13860	146
	6ID	16170	170
	7ID	18850	196

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 941LUTP 7D 35K F05.IES

POLAR GRAPH

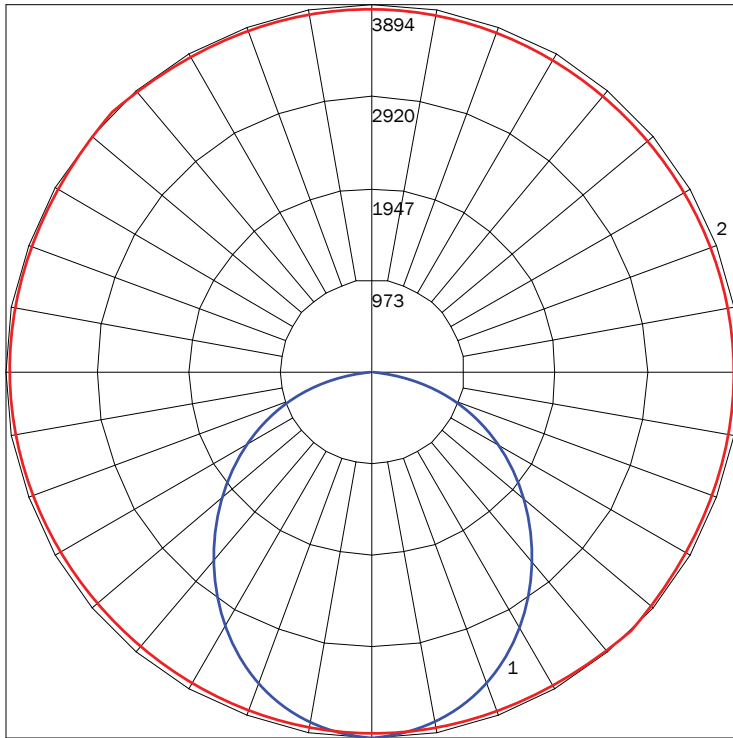

MAXIMUM CANDELA = 3893.9 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	9425
TOTAL LUMINAIRE EFFICIENCY	72%
LUMINAIRE EFFICACY RATING	92
TOTAL LUMINAIRE WATTS	34

LUNA TRIO™ PENDANT

FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F15
MATTE
BLACK



F16
GLOSS
BLACK



F09
PEWTER



F31
SILVER
METALLIC



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE

PREMIUM FINISHES



RAL
CUSTOM
(RAL #)



F40
BUBBLE
PINK



F10
FIRE
RED



F41
ELECTRIC
PURPLE



F08
MIDNIGHT
BLUE



F39
AQUA
BLUE



F13
FOREST
GREEN



F38
MEADOW
GREEN



F45
COPPER
METALLIC



F06
CLAY
BROWN



F11
CITRUS
ORANGE



F28
DARK
CHAMPAGNE



F22
HARVEST
GOLD



F14
SUNSHINE
YELLOW



F33
PYRITE
BRONZE



F07
ZEUS
BROWN




F32
BRONZE
METALLIC



F26
MELTED
COPPER



F25
MELTED
GOLD



F24
MELTED
PLATINUM



F44
FAUX
COPPER



F43
FAUX
GOLD



F42
FAUX
CHROME

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.