

LUNA ZEST™ PENDANT


PROJECT: _____
 TYPE: _____
 QUANTITY: _____





PN: 941LURSP

ILLUMINATION	<ul style="list-style-type: none"> • 4,483 - 15,326 LUMENS • DIRECT OR INDIRECT/DIRECT • LED 90CRI
APPLICATION	<ul style="list-style-type: none"> • DIRECT OR DIRECT/INDIRECT PENDANT MOUNT • INDOOR RATED
DIMENSION	<ul style="list-style-type: none"> • AVAILABLE IN LENGTHS RANGING FROM 60" - 96" AND WIDTHS RANGING FROM 36" - 60" • PROFILE: 1"W X 2.625"H (2.54cm X 6.6675cm)
ELECTRICAL	<ul style="list-style-type: none"> • 120 - 277V • 10KV SURGE SUPPRESSION
DIFFUSERS	<ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none"> • 120" (304.8cm) BLACK OR WHITE DROP CORD WITH AIRCRAFT CABLES • 120" (304.8cm) POWER OVER SUSPENSION
LED DRIVER	<ul style="list-style-type: none"> • CANOPY OR REMOTE MOUNT
CONSTRUCTION	<ul style="list-style-type: none"> • ALUMINUM
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0 - 10V DIMMING (120-277V) • LINE VOLTAGE/TRIAC/ELV (120V ONLY) • LUTRON DIMMING (120-277V)
WEIGHT	<ul style="list-style-type: none"> • 25 LBS MINIMUM, 43 LBS MAXIMUM

FLAT DIFFUSER

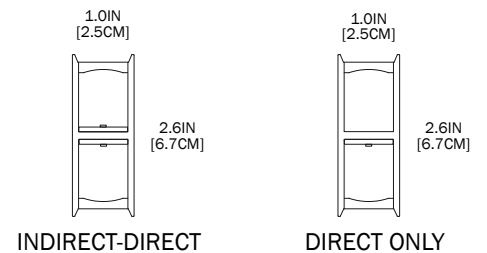

DOM DIFFUSER

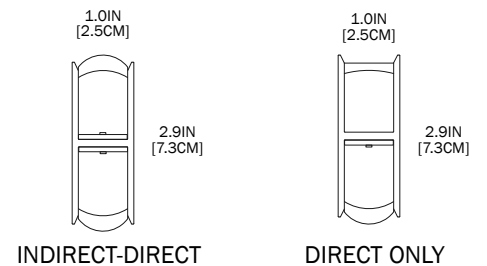

LUNA ZEST™ PENDANT



PROJECT: _____
 TYPE: _____
 QUANTITY: _____

941LURSP

1 2 3 4 5 6 7 8

1.	DIRECT									
PN	5L3WD	6L3WD	7L3WD	7L4WD	8L3WD	8L4WD	8L5WD	CUS		
LxW (Inch)	60x36	72x36	84x36	84x48	96x36	96x48	96x60	CUSTOM SIZE (SPECIFY LXW)		
LED (W)	48	55	63	70	70	77	85			
LUMENS	4483	5167	5859	6547	6547	7240	7930			
	DIRECT/INDIRECT									
PN	5L3WID	6L3WID	7L3WID	7L4WID	8L3WID	8L4WID	8L5WID	CUS		
LxW (Inch)	60x36	72x36	84x36	84x48	96x36	96x48	96x60	CUSTOM SIZE (SPECIFY LXW)		
LED (W)	96	111	125	140	140	155	170			
LUMENS	8480	9862	11240	12581	12581	14000	15326			
2.	H		M		L		C: _____ ²			
OUTPUT	100% LUMENS		75% LUMENS		50% LUMENS		[CUSTOM]% LUMENS			
3.	30K		35K		40K					
CCT	3000		3500		4000					
4.	S				D					
CIRCUITS	SINGLE				DUAL					
5.	MMCD				MMRM					
MOUNTING	MULTIPLE CABLES AND CANOPY DRIVER				MULTIPLE CABLES AND REMOTE DRIVER					
6.	BC		WC		POS					
CORD	BLACK DROP CORD WITH AIRCRAFT CABLES		WHITE DROP CORD WITH AIRCRAFT CABLES		POWER OVER SUSPENSION (SILVER ONLY) (FOR APPLICABLE SIZES SEE CHART ON PAGE THREE) (NOT APPLICABLE FOR MMCD COMBINATION)					
7.	FLAT				DOM					
DIFFUSER	FLAT DIFFUSER				DOME DIFFUSER					
8.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART			F04	F05	F15	F16	F09	F31	F18
FINISH				MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM
9.	DIML		DIME			DIMV				
DIMMING	0-10V (120-277V)		LUTRON HI-LUME (120-277V) (FOR APPLICABLE SIZES SEE CHART ON PAGE THREE)			LINE VOLTAGE/TRIAC/ELV (120V ONLY)				

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.








SPECIFICATIONS

MMCD, MMRM, AND POS SIZING VARIATIONS¹

SIZE	SIZE	POS	DIME	MOUNTING POINTS	CANOPY SIZE	NUMBER OF CANOPY	WEIGHT (POUNDS - LBS)	SECTIONS
5L3W	60" x 36"	YES	YES	4	10"	1(D)/ 1(ID)	25	1
6L3W	72" x 36"	YES	YES	4	10"	1(D)/ 1(ID)	29	1
7L3W	84" x 36"	YES	YES	4	10"	1(D)/ 1(ID)	32	1
7L4W	84" x 48"	NO	NO	4	10"	1(D)/ 1(ID)	35	1
8L3W	96" x 36"	NO	NO	6	10"	1(D)/ 1(ID)	38	1
8L4W	96" x 48"	NO	NO	6	10"	1(D)/ 1(ID)	40	1
8L5W	96" x 60"	NO	NO	6	10"	1(D)/ 1(ID)	43	1



1. THE VISUAL REPRESENTATIONS OF THESE OPTIONS AND THEIR SPECIFICATIONS ARE LISTED ON THE FOLLOWING PAGE FOUR.

LUNA ZEST™ PENDANT

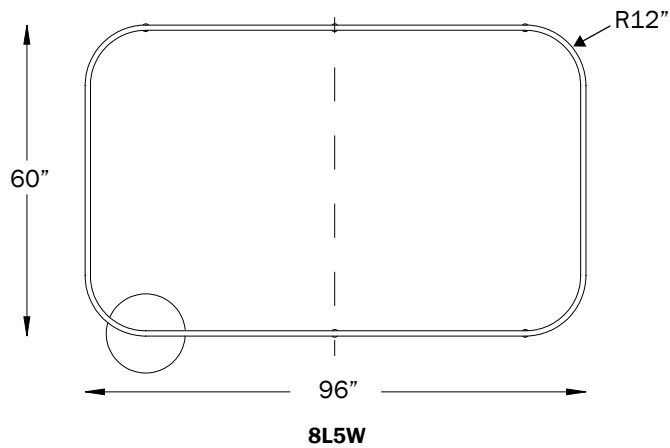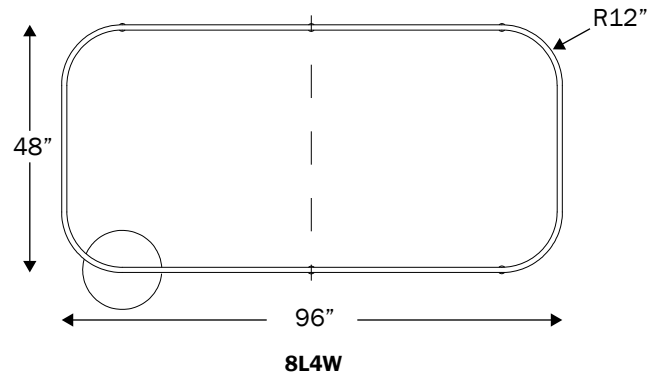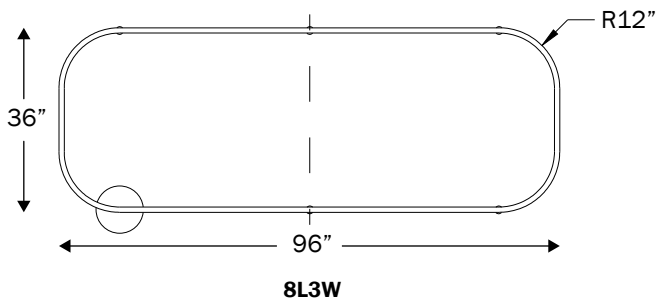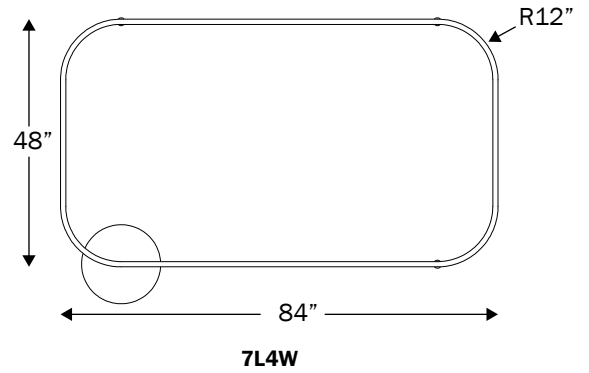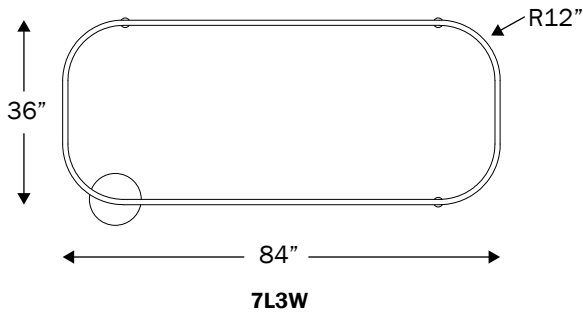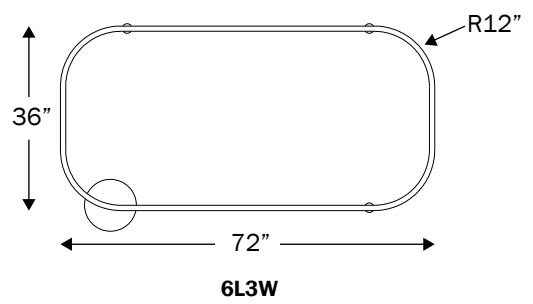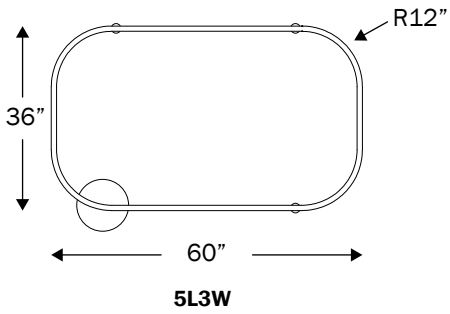



POS (POWER OVER SUSPENSION)

MMRM COMBINATION (MUTIPLE CABLES, REMOTE MOUNT DRIVER)

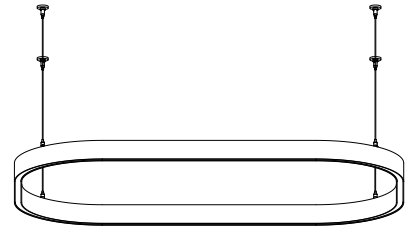
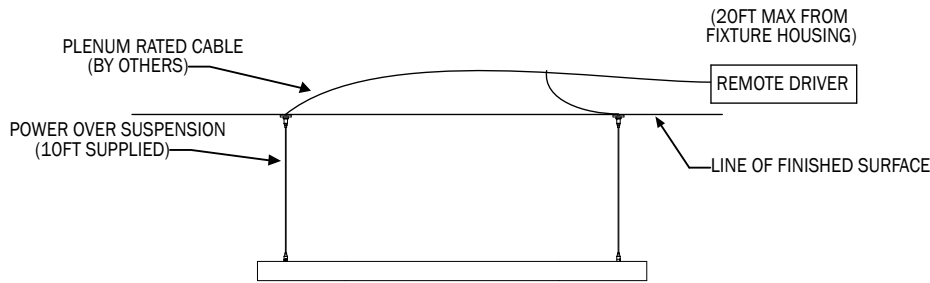


DROP CORD

MMCD COMBINATION (MUTIPLE CABLES, CANOPY MOUNT DRIVER)

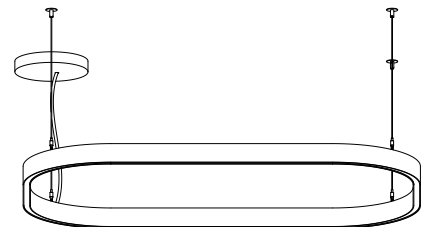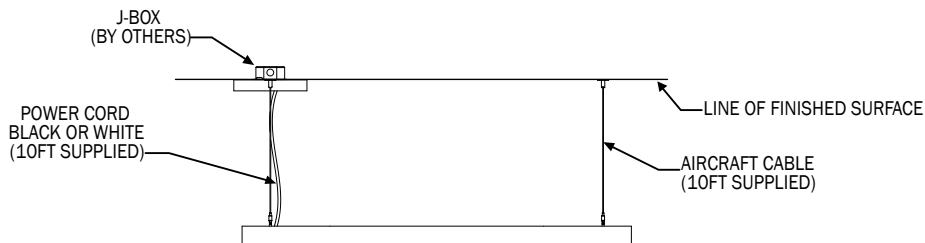

MMRM COMBINATION (MUTIPLE CABLES, REMOTE MOUNT DRIVER)

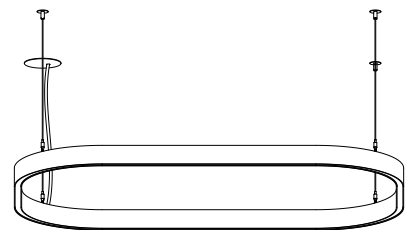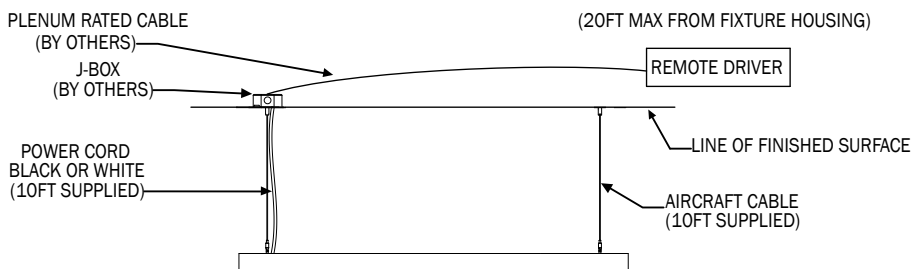

LUNA ZEST™ PENDANT

DIRECT

PN (INCH)	LUMENS	WATTAGE
5L3WD	4483	48
6L3WD	5167	55
7L3WD	5859	63
7L4WD	6547	70
8L3WD	6547	70
8L4WD	7240	77
8L5WD	7930	85


DIRECT/INDIRECT

PN (INCH)	LUMENS	WATTAGE
5L3WID	8480	96
6L3WID	9862	111
7L3WID	11240	125
7L4WID	12581	140
8L3WID	12581	140
8L4WID	14000	155
8L5WID	15326	170

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 941LURSP 8L5WD 35K F05.IES

POLAR GRAPH

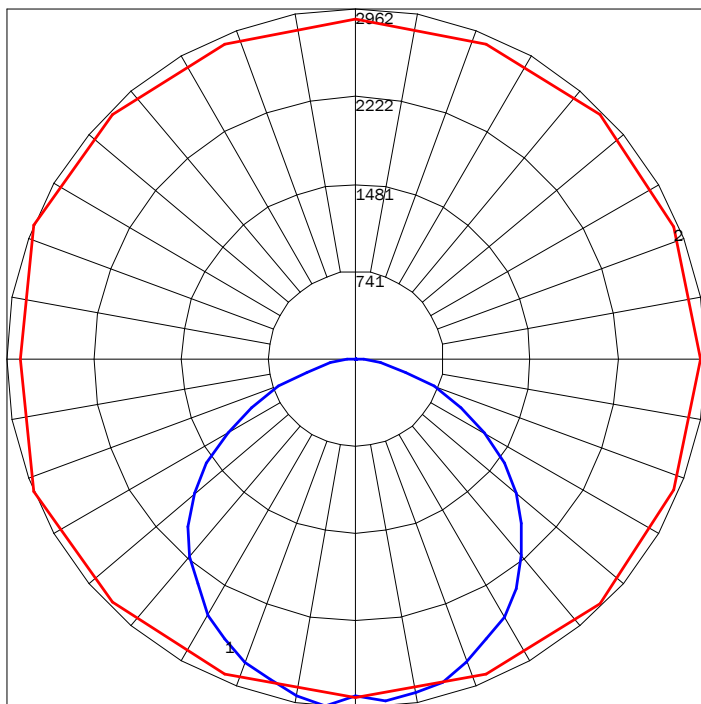


MAXIMUM CANDELA = 2962.16 LOCATED AT HORIZONTAL ANGLE = 157.5, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (157.5 - 337.5) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 7930
TOTAL LUMINAIRE EFFICIENCY 60%
LUMINAIRE EFFICIENCY RATING 94
TOTAL LUMINAIRE WATTS 85

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 941LURSP 8L5WID 35K F05.IES

POLAR GRAPH

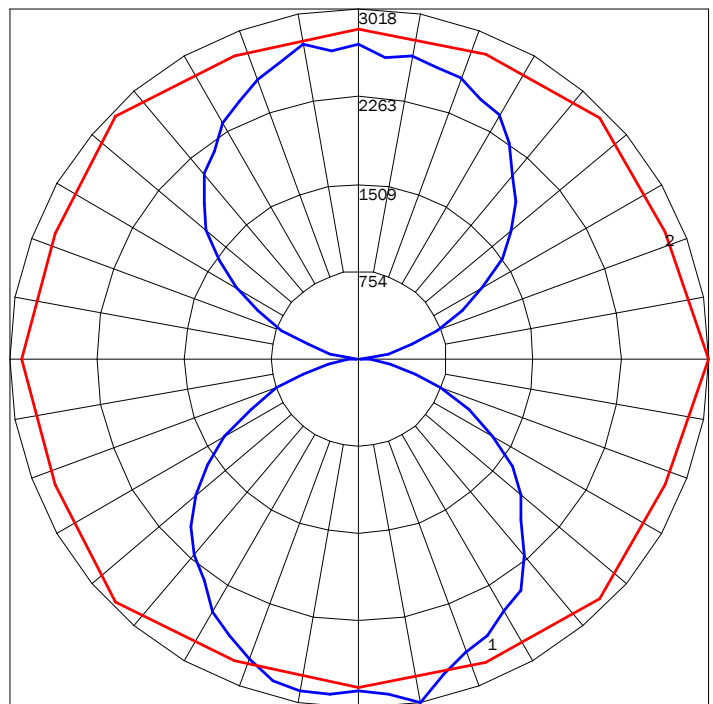

MAXIMUM CANDELA = 3017.67 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 10
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (10) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 15326
TOTAL LUMINAIRE EFFICIENCY 58%
LUMINAIRE EFFICIENCY RATING 90
TOTAL LUMINAIRE WATTS 170

LUNA ZEST™ PENDANT

FINISHES



PREMIUM FINISHES



DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.