


LUNA ZEST™ CEILING

PROJECT: _____

TYPE: _____


QUANTITY: _____

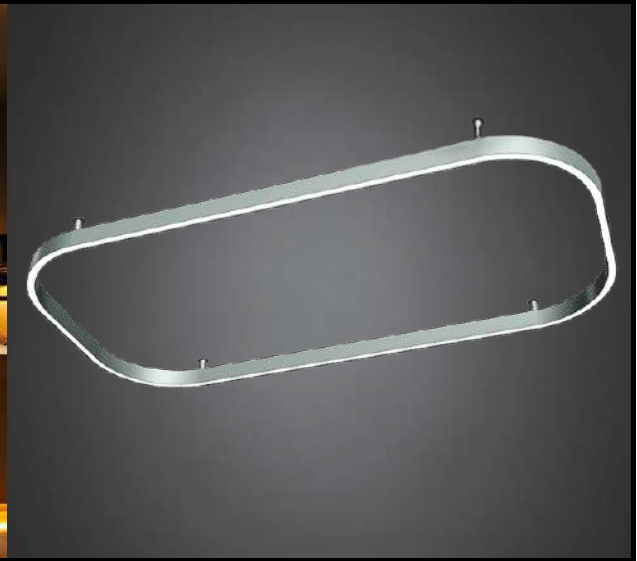

PN: 941LURSP


ILLUMINATION	• 4,483 - 7,930 LUMENS • DIRECT • LED 90CRI
APPLICATION	• DIRECT CEILING MOUNT • INDOOR RATED
DIMENSION	• AVAILABLE IN LENGTHS RANGING FROM 60" - 96" AND WIDTHS RANGING FROM 36" - 60" • PROFILE: 1"W X 2.625"H (2.54cm X 6.6675cm)
ELECTRICAL	• 120 - 277V • 10KV SURGE SUPPRESSION
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• CANOPY OR REMOTE MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V (1%) DIMMING (120-277V) • LINE VOLTAGE/TRIAC/ELV (120V ONLY) • LUTRON HI-LUME (1%) DIMMING (120-277V)
WEIGHT	• 25 LBS MINIMUM, 43 LBS MAXIMUM

FLAT DIFFUSER



DIRECT ONLY

DOM DIFFUSER



DIRECT ONLY




TMSLIGHTING

INDOOR



LUNA ZEST™ CEILING

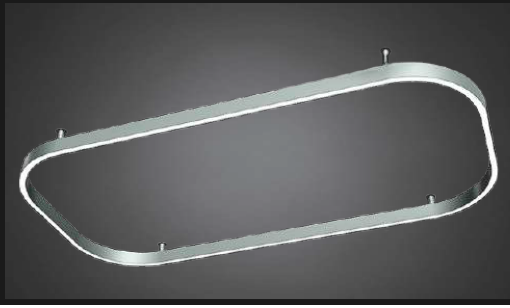

PROJECT: _____
 TYPE: _____
 QUANTITY: _____

941LURSCL - 1 - 2 - 3 - 4 - 5 - 6 - 7

1.	5L3WD	6L3WD	7L3WD	7L4WD	8L3WD	8L4WD	8L5WD	CUS	
LxW (INCH)	60x36	72x36	84x36	84x48	96x36	96x48	96x60	CUSTOM SIZE (SPECIFY LXW)	
LED (W)	48	55	63	70	70	77	85		
LUMENS	4483	5167	5859	6547	6547	7240	7930		
2.	H		M		L		C: _____ ²		
OUTPUT	100% LUMENS		75% LUMENS		50% LUMENS		[CUSTOM]% LUMENS		
3.	30K		35K			40K			
CCT	3000		3500			4000			
4.	CD				RM				
MOUNTING	CANOPY MOUNT				REMOTE MOUNT				
5.	FLAT				DOM				
DIFFUSER	FLAT DIFFUSER				DOME DIFFUSER				
6.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART		F04	F05	F15	F16	F09	F31	F18
FINISH			MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM
7.	DIML		DIME			DIMV			
DIMMING	0-10V (1%) (120-277V)		LUTRON HI-LUME (1%) (120-277V) (FOR APPLICABLE SIZES SEE CHART ON PAGE THREE)			LINE VOLTAGE/TRIAC/ELV (120V ONLY)			

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. **ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.** CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING










SPECIFICATIONS

CANOPY AND REMOTE SIZING VARIATIONS¹

SIZE	SIZE	DIME	MOUNTING POINTS	CANOPY SIZE	NUMBER OF CANOPY	WEIGHT (POUNDS - LBS)	SECTIONS
5L3W	60" x 36"	YES	4	10"	1	25	1
6L3W	72" x 36"	YES	4	10"	1	29	1
7L3W	84" x 36"	YES	4	10"	1	32	1
7L4W	84" x 48"	NO	4	10"	1	35	1
8L3W	96" x 36"	NO	6	10"	1	38	1
8L4W	96" x 48"	NO	6	10"	1	40	1
8L5W	96" x 60"	NO	6	10"	1	43	1


1. THE VISUAL REPRESENTATIONS OF THESE OPTIONS AND THEIR SPECIFICATIONS ARE LISTED ON THE FOLLOWING PAGE FOUR.

LUNA ZEST™ CEILING

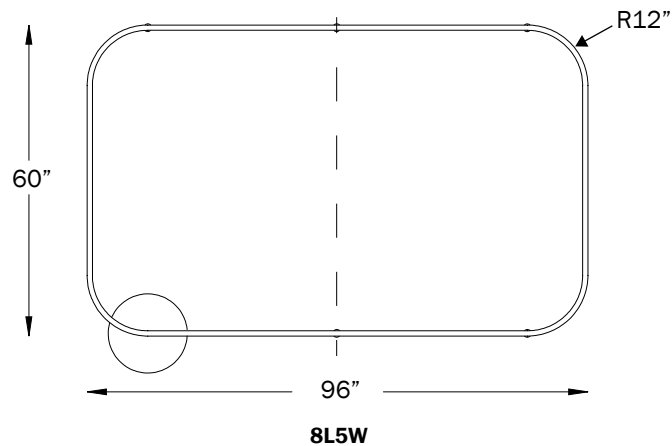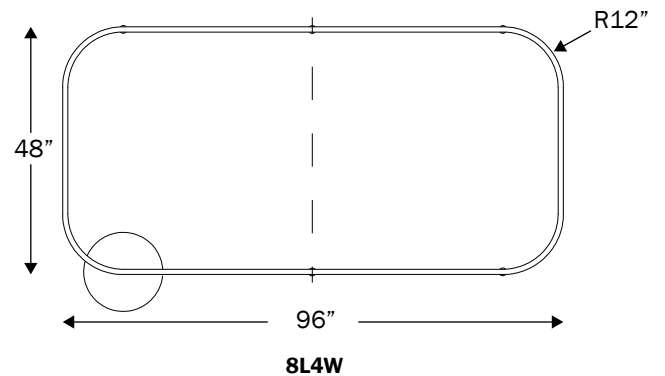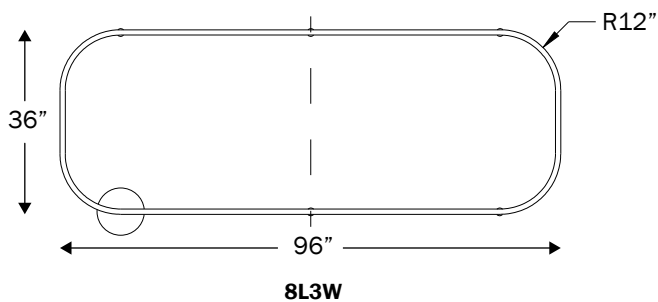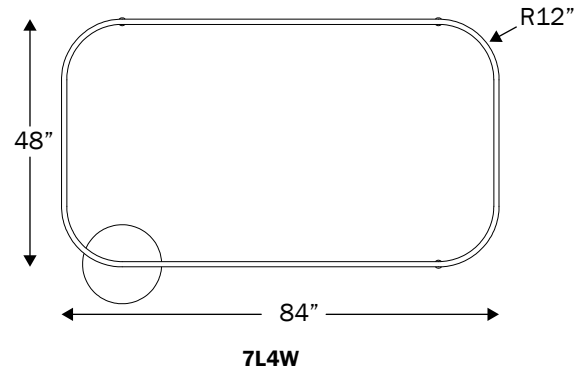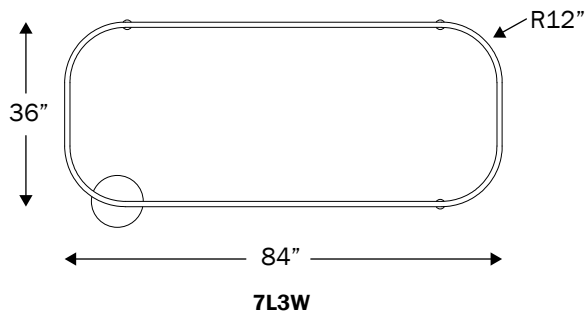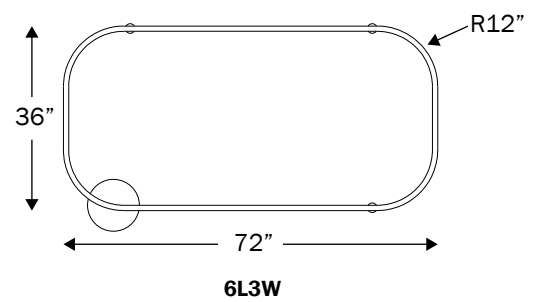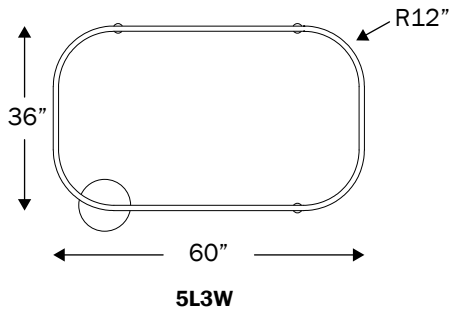


MOUNTING

CANOPY MOUNT DRIVER

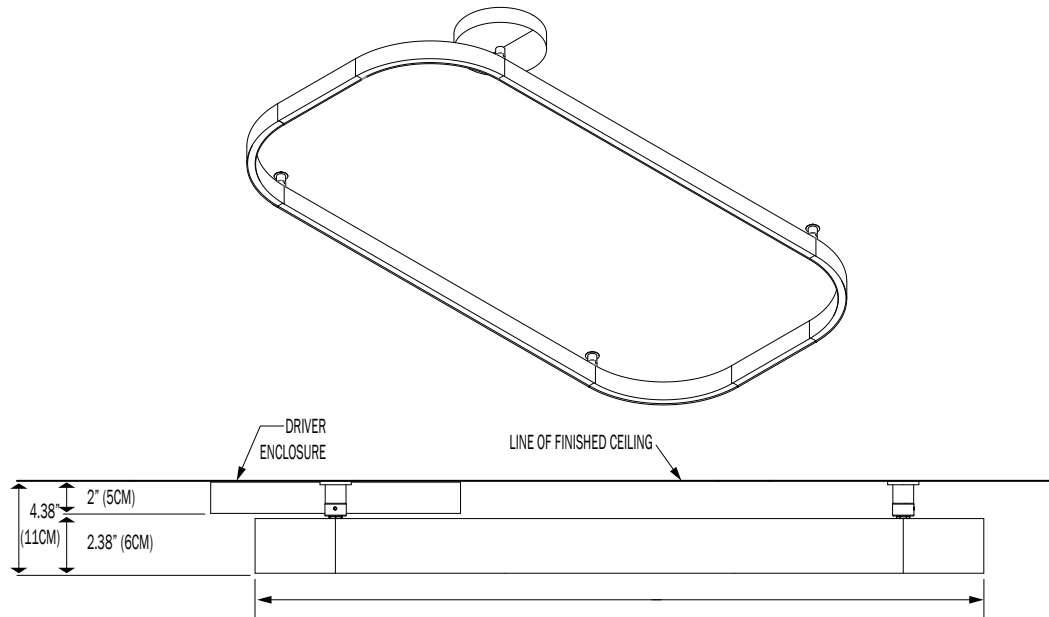

REMOTE MOUNT DRIVER

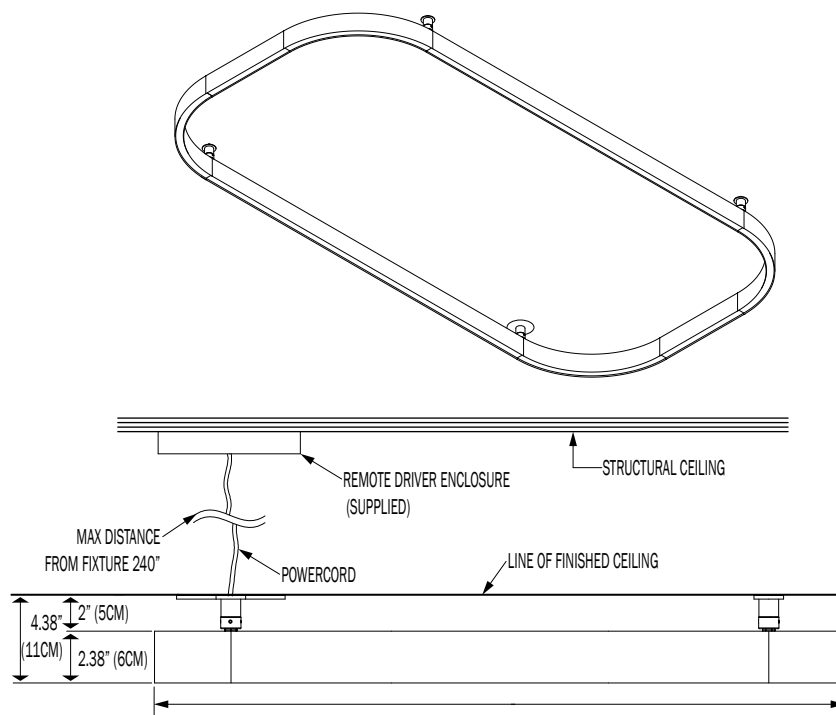


DIRECT

PN (INCH)	LUMENS	WATTAGE	CANOPY DIA	WEIGHT
5L3WD	4483	48	10"	25 LBS
6L3WD	5167	55	10"	29 LBS
7L3WD	5859	63	10"	32 LBS
7L4WD	6547	70	10"	35 LBS
8L3WD	6547	70	10"	38 LBS
8L4WD	7240	77	10"	40 LBS
8L5WD	7930	85	10"	43 LBS

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 941LURSCL DO 5L3WD 35K F05.IES

POLAR GRAPH

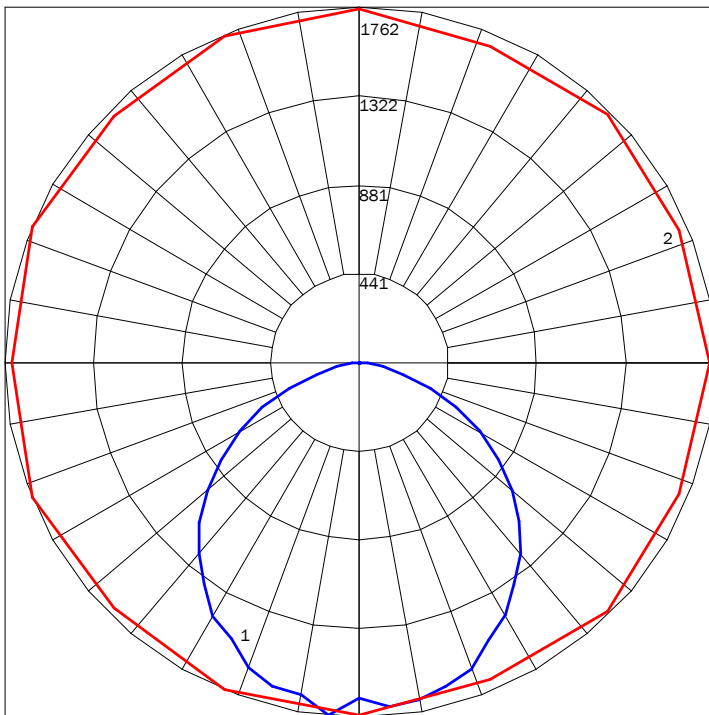


MAXIMUM CANDELA = 1762.2 LOCATED AT HORIZONTAL ANGLE = 157.5, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (157.5 - 337.5) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 941LURSCL 8L5WD 35K F05.IES

POLAR GRAPH

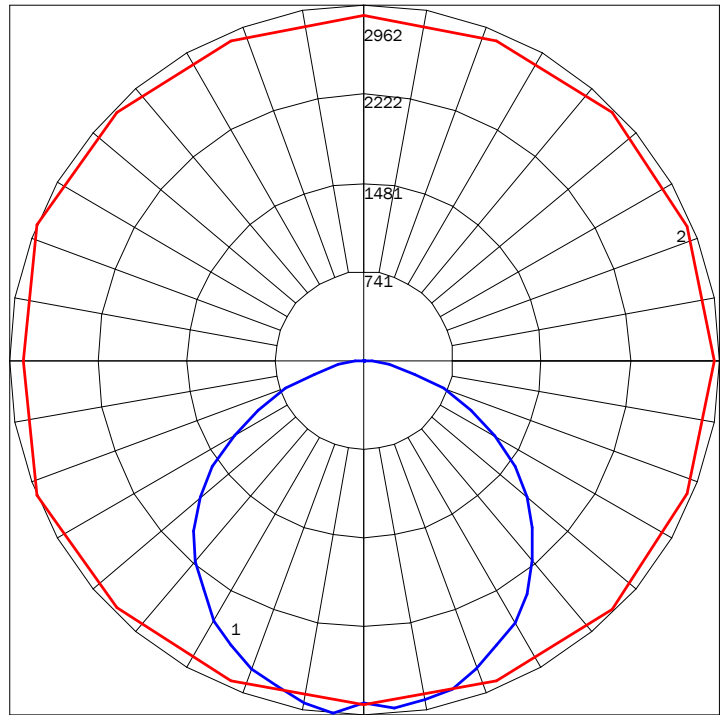

MAXIMUM CANDELA = 3017.67 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 10
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (10) (THROUGH MAX. CD.)

LUMINAIRE LUMENS

4483

TOTAL LUMINAIRE EFFICIENCY

60%

LUMINAIRE EFFECIENCY RATING

94

TOTAL LUMINAIRE WATTS

48

LUMINAIRE LUMENS

7930

TOTAL LUMINAIRE EFFICIENCY

60%

LUMINAIRE EFFECIENCY RATING

94

TOTAL LUMINAIRE WATTS

85

FINISHES



PREMIUM FINISHES



DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.