PROJECT: TYPE: QTY:





PRODUCT #	MOO1
APPLICATION	• INDOOR RATED
DIMENSIONS	• 8", 12", 18", AND 24" (20CM, 30CM, 45CM, AND 60CM)
ILLUMINATION	• DIRECT • LED 90 CRI • 1,102 - 2,894 LUMEN RANGE
LED DRIVER	• CANOPY OR REMOTE
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• 120" (30.5CM) BLACK OR WHITE CORD WITH AC CABLES
CONSTRUCTION	• ALUMINUM
FINISHES	AVAILABLE IN SEVERAL TMS POWDER     COATED FINISHES     CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0-10V STANDARD DIMMING (1%) • LINE VOLTAGE/TRIAC/ELV (120V ONLY)
WEIGHT	• 3 LBS 13 LBS.









TYPE: QTY: PROJECT:

MO01-		-	-	_	-		-		-
	1	2	3	4	5	6	7	8	9

							•					
1.	8		12		18		24					
DIA	8" (20.32CM)		12" (30.48CM)			18" (45.72CM)		24" (60.96CM)				
WATTAGE	20W MAX			20W MA	ΑX	3	BOW MAX			40W MA	X	
LUMENS	1102			1096		1856		2894				
2.	Н			М		L			<b>C</b> :1			
OUTPUT	100% LUMEN	S		75% LUMI	ENS	50% LUMENS [CUSTOM]% LUMEN			JMENS			
3.	30	)K			3:	5K			4	40K		
ССТ	30	00	35			00	00 4000					
4.	BC WC											
CORD	BLACK DROP CORD				WHITE DROP CORD							
5.	CD RM											
DRIVER		CANOPY N	ИOUNT			REMOTE MOUNT						
6.				F04	F05	F15	F16	FO	9	F31	F18	
FINISH				MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK			SILVER METALLIC	SATIN ALUMINUM	
7.	F04	F05			F10	F14		F1	<b>.</b> 5		00	
INTERIOR FINISH	MATTE WHITE	GLOSS WHITE	DSS FIRE RED			SUNSHII YELLOV	NE W	MA <sup>-</sup> BLA	ITE ICK	AS	SAME OUTSIDE	
8.	DIML											
DIMMING	0-10V(1%) (120-277V) LINE VOLTAGE/TRIAC/ELV (120V ONLY)											
9.	ACC											
MOUNTING ACCESSORIES	AIRCRAFT CABLE FOR DROP CORDS											

<sup>1.</sup> CUSTOM PERCENTAGE I.E. 60%. CONSULT AGENT.

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.







## **DIRECT LIGHTING**

PN	SIZE (DIA)	LUMENS	WATTAGE
	8 12	1102	20
моо		1096	20
	18	1856	30
	24	2894	40

**IES INDOOR REPORT** 

PHOTOMETRIC FILENAME: MOO 12 15LED 35K F05.IES

**IES INDOOR REPORT** 


PHOTOMETRIC FILENAME: MOO 18 32LED 35K F05.IES

#### **POLAR GRAPH**

# 1200 800 800 300

Maximum Candela = 1050.62 Located At Horizontal Angle = 0, Vertical Angle = 0 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) # 2 - Vertical Plane Through Horizontal Angles (0 - 180)

## POLAR GRAPH

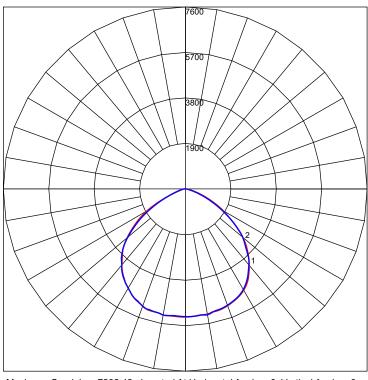

Maximum Candela = 7232.42 Located At Horizontal Angle = 0, Vertical Angle = 0 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) # 2 - Vertical Plane Through Horizontal Angles (0 - 180)

LUMINAIRE LUMENS
<b>TOTAL LUMINAIRE EFFICIENCY</b>
<b>LUMINAIRE EFFICACY RATING</b>
TOTAL LUMINAIRE WATTS

1096	LUMINAIRE LUMENS	2894
NA	TOTAL LUMINAIRE EFFICIENCY	NA
64	LUMINAIRE EFFICACY RATING	80
17	TOTAL LUMINAIRE WATTS	36

#### **STANDARD**



F04 **MATTE** WHITE



F05 **GLOSS** WHITE



F15 **MATTE BLACK** 



F16 GLOSS BLACK



F09 **PEWTER** 



F31 **SILVER METALLIC** 



F18 SATIN **ALUMINUM** 



F21 ARCH **BRONZE** 

#### **PREMIUM**



**RAL CUSTOM** (RAL #)



F40 **BUBBLE** PINK



F10 **FIRE** RED



F41 **ELECTRIC** PURPLE



F08 **MIDNIGHT BLUE** 



**F39** AQUA **BLUE** 



F13 **FOREST GREEN** 



**F38 MEADOW GREEN** 



F45 **COPPER METALLIC** 



F06 CLAY **BROWN** 



F11 **CITRUS ORANGE** 



F281 DARK **CHAMPAGNE** 



F22<sup>1</sup> **HARVEST GOLD** 



F14 SUNSHINE YELLOW



F331 **PYRITE BRONZE** 



F07 ZEUS **BROWN** 



**F32** BRONZE **METALLIC** 



F26<sup>1</sup> MELTED **COPPER** 



F25<sup>1</sup> MELTED **GOLD** 



F24<sup>1</sup> MELTED **PLATINUM** 



F441 **FAUX** COPPER



F43<sup>1</sup> **FAUX** GOLD



F42<sup>1</sup> **FAUX CHROME** 

## ACCENT



F04 MATTE WHITE





F15 MATTE BLACK



F10 FIRE RED








1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE. 2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK. NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE. MATTE FINISHES AVAILABLE. CONSULT FACTORY. FINISHES ARE SUBJECT TO AVAILAB ILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.






# **AIRCRAFT CABLE & CORD (CANOPY MOUNT)**

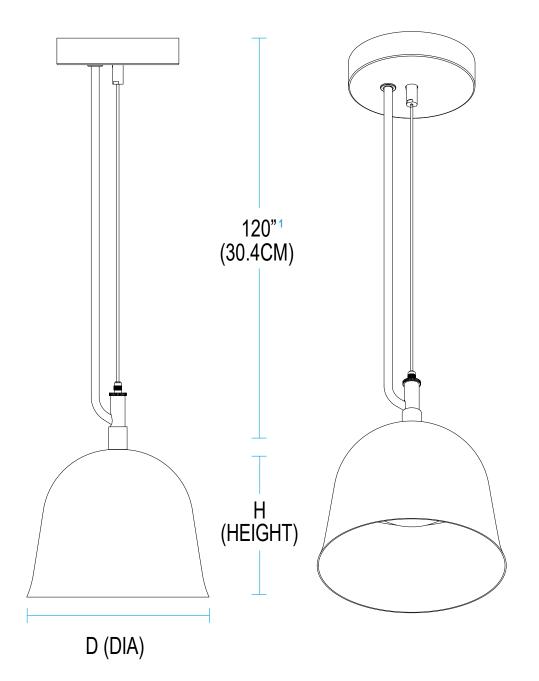





2 POWER CORD (BLACK OR WHITE)


3 AIRCRAFT CABLE


D (DIA)	H (HEIGHT)	WEIGHT
8" (20.3CM)	6.5" (16.5CM)	3LBS
12" (30.4CM)	10.5" (26.6CM)	5LBS
18" (45.72CM)	15.5" (39.7CM)	8LBS
24" (60.96CM)	21.8" (55.2CM)	13LBS


FOR LENGTHS BEYOND 120" (10FT) CONSULT FACTORY



# **AIRCRAFT CABLE & CORD (REMOTE MOUNT)**

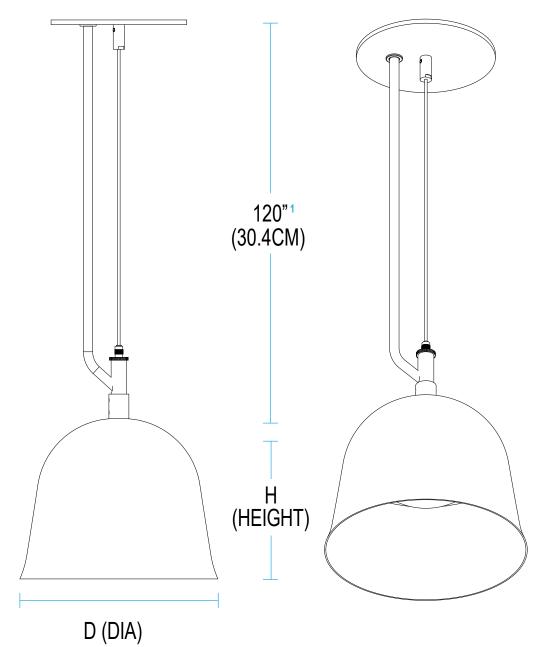






3 AIRCRAFT CABLE

D (DIA)	H (HEIGHT)	WEIGHT
8" (20.3CM)	6.5" (16.5CM)	3LBS
12" (30.4CM)	10.5" (26.6CM)	5LBS
18" (45.72CM)	15.5" (39.7CM)	8LBS
24" (60.96CM)	21.8" (55.2CM)	13LBS



4 J-BOX SUPPLIED BY OTHERS

