


PROJECT: _____
 TYPE: _____
 QUANTITY: _____




PN: 2130NSC

APPLICATION	<ul style="list-style-type: none"> • CEILING MOUNT • INDOOR RATED
DIMENSION	<ul style="list-style-type: none"> • 8', 16', 24', 32' AND CUSTOM SIZES AVAILABLE (2388MM, 4748MM, 7137MM, 9525MM) • PROFILE: 2.75"W X 3"H (699MM X 762MM)
ILLUMINATION	<ul style="list-style-type: none"> • DIRECT • LED 90CRI • 528 - 1057 LUMENS PER FOOT
ELECTRICAL	<ul style="list-style-type: none"> • 120 - 277V (347V CONSULT FACTORY) • 6KV SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none"> • HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none"> • CEILING
CONSTRUCTION	<ul style="list-style-type: none"> • ALUMINUM
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0 - 10V STANDARD DIMMING (1%) • LUTRON (1%) DIMMING OPTIONAL
WEIGHT	<ul style="list-style-type: none"> • 24 LBS MINIMUM, 96 LBS MAXIMUM (CUSTOM EXCL.)

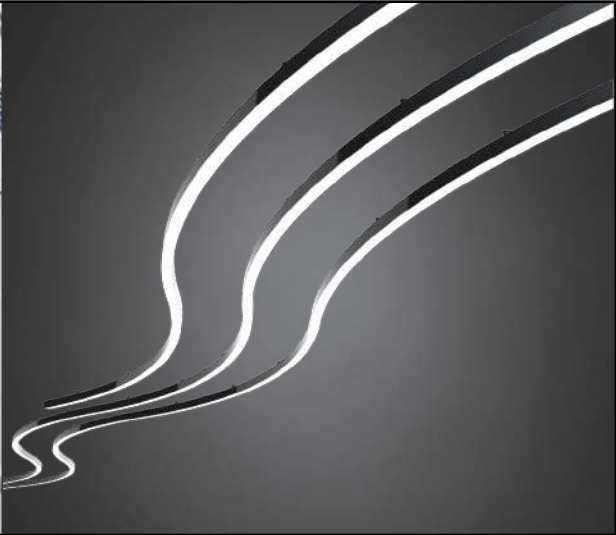

ONDA™ S CEILING

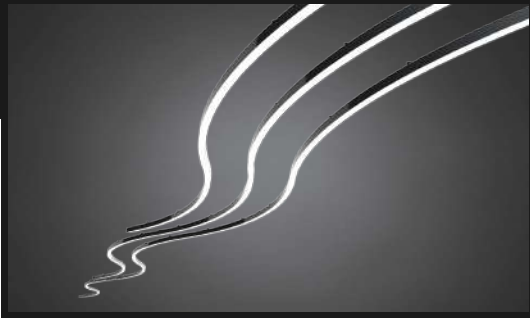


PROJECT: _____

TYPE: _____

QUANTITY: _____

2130NSC




1.	8D	16D	24D	32D	CUS ¹	
LENGTH	94" (2388MM)	187" (4749MM)	281" (7137MM)	375" (9525MM)	CUSTOM SIZE (SPECIFY LENGTH)	
LED (W)	90	180	270	360		
LUMEN	8454	16908	25362	33816		
2.	H	M	L	C: ___ ²		
OUTPUT	100% LUMENS	75% LUMENS	50% LUMENS	[CUSTOM]% LUMENS		
3.	30K		35K		40K	
CCT	3000		3500		4000	
4.	347			UNI		
VOLTAGE	347V			120-277V		
5.	F04	F05	F15	F16	F18	RAL
FINISH	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	CUSTOM (SPECIFY)
6.	DS		OS		DOS	
SENSORS	DAYLIGHT		OCCUPANCY		DAYLIGHT/OCCUPANCY	
7.	DIML			DIME		
DIMMING	STANDARD 0-10V (1%)			LUTRON HI-LUME (1%)		

1. CUSTOM LENGTHS MAY REQUIRE MORE THAN ONE POWER CABLE. CONTACT TMS LIGHTING FOR MORE INFO.

2. CUSTOM PERCENTAGE I.E. 60%. CONSULT FACTORY.


3. 127V - 277V AVAILABLE.

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.




- MOUNTING POINTS: 3
- WEIGHT: 24 LBS

8D / 8ID

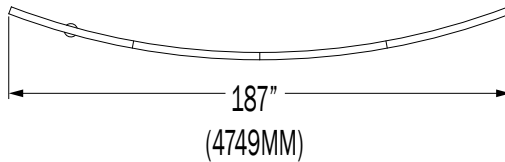


- MOUNTING POINTS: 4
- WEIGHT: 48 LBS

16D / 16ID

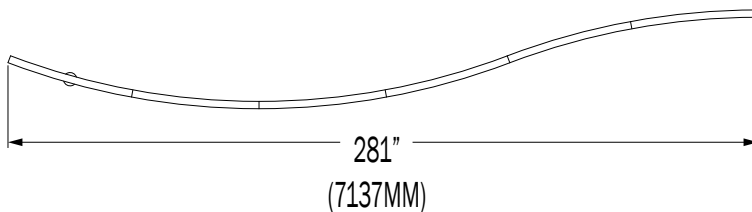


- MOUNTING POINTS: 6
- WEIGHT: 72 LBS

24D / 24ID

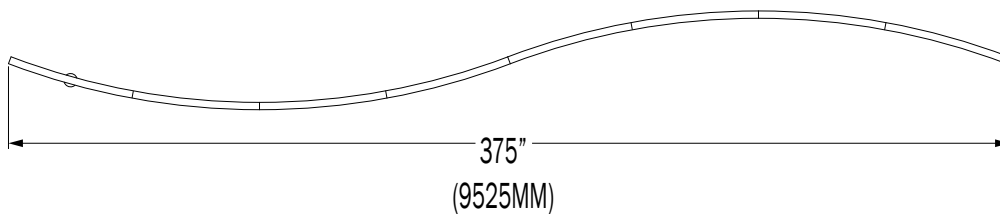



- MOUNTING POINTS: 8
- WEIGHT: 96 LBS

32D / 32ID

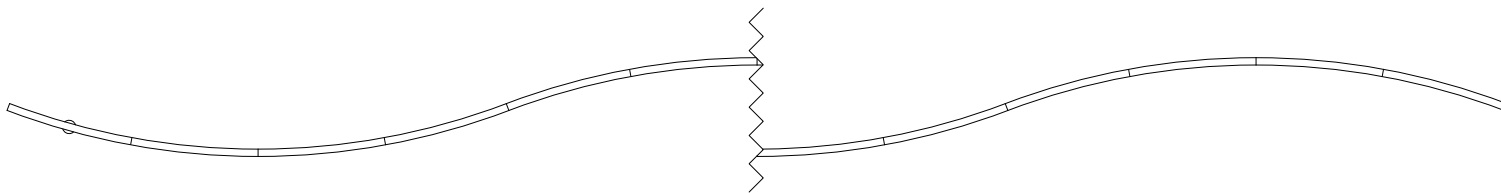

- MOUNTING POINTS: 2/8FT
- WEIGHT: 24 LBS/8FT

CUS

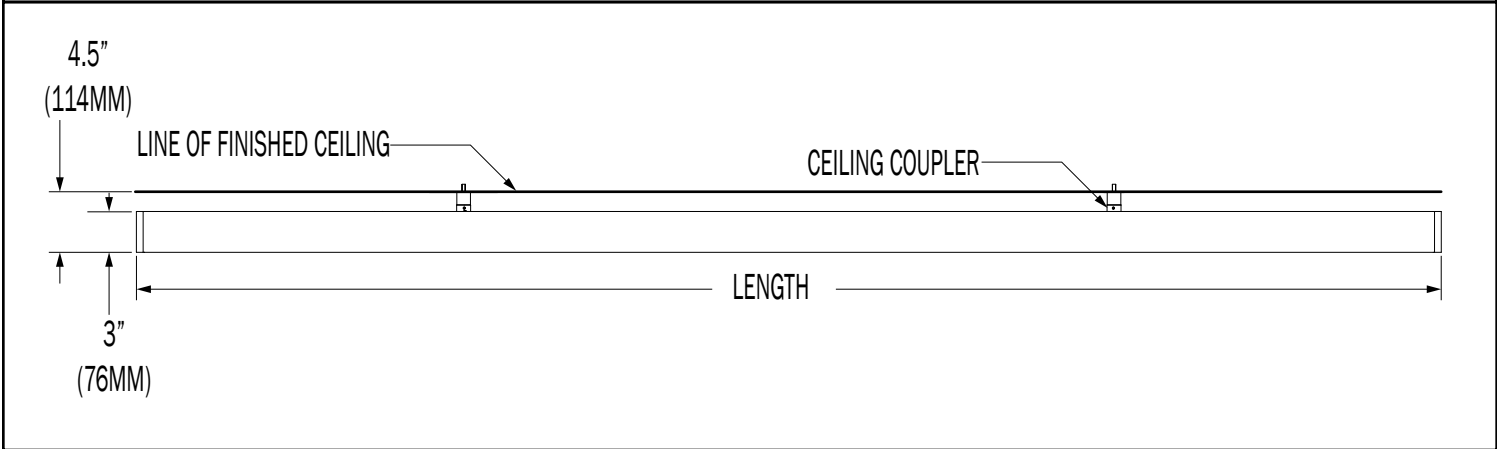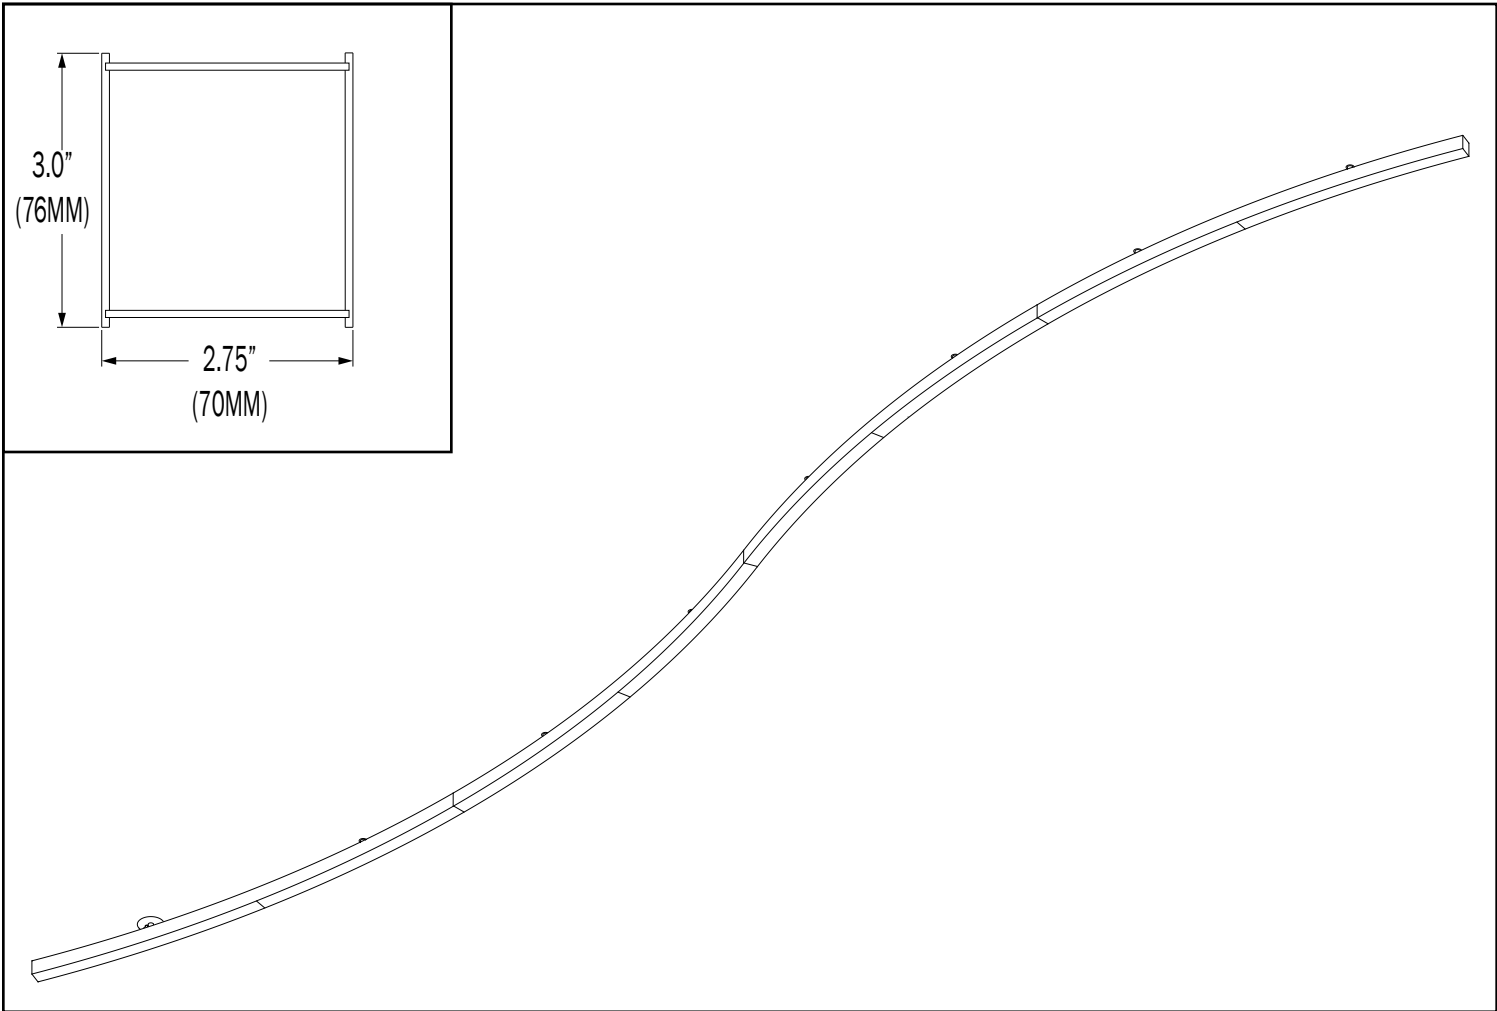


DIRECT

PN	LUMENS	WATTAGE
8D	8454	90
16D	16908	180
24D	25362	270
32D	33816	360

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 2130NSC D 35K F05.IES

POLAR GRAPH

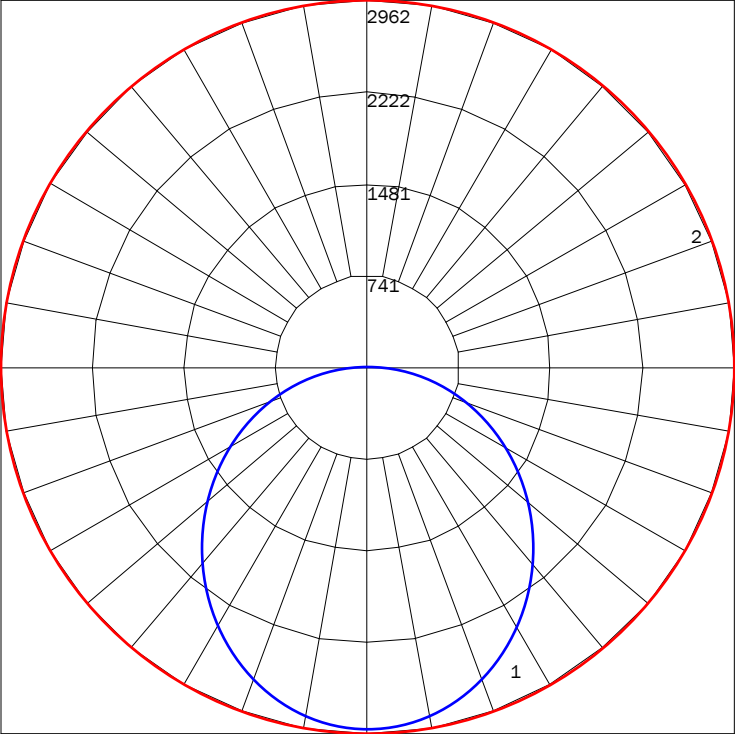

MAXIMUM CANDELA = 2962.13 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (0) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	8454
TOTAL LUMINAIRE EFFICIENCY	73%
LUMINAIRE EFFECIENCY RATING	94
TOTAL LUMINAIRE WATTS	90

FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



RAL
CUSTOM
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.