

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: CYP

APPLICATION	<ul style="list-style-type: none"> • PENDANT MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	<ul style="list-style-type: none"> • 6" DIA OR 8" DIA (15CM, 20CM)
ILLUMINATION	<ul style="list-style-type: none"> • DIRECT • LED 90CRI • 711 - 2,994 LUMENS
ELECTRICAL	<ul style="list-style-type: none"> • 120v, 277V, AND 347V • 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none"> • CLEAR, FLAT, TEMPERED GLASS
MOUNTING	<ul style="list-style-type: none"> • 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE (OPTIONAL) • 1" TO 60" (2.5CM TO 152CM) STEM MOUNT
CONSTRUCTION	<ul style="list-style-type: none"> • ALUMINUM
FINISHES	<ul style="list-style-type: none"> • AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none"> • 0 - 10V STANDARD DIMMING
WEIGHT	<ul style="list-style-type: none"> • 9.5 LBS MAXIMUM



CYLINDER™ CYLINDER



PROJECT: _____

TYPE: _____

QUANTITY: _____

CYP - - - - - 1 - - - - - 2 - - - - - 3 - - - - - 4 - - - - - 5 - - - - - 6 - - - - - 7 - - - - - 8 - - - - - 9 - - - - - 10 - - - - - 11 - - - - - 12

1.	I				O								
APPLICATION	INDOOR				OUTDOOR								
2.	6				8								
DIAMETER	6"DIA. (15CM)				8"DIA. (20CM)								
3.													
ILLUMINATION	100IN¹	15LED	19LED	32LED	150IN¹	15LED	19LED	32LED					
LED (W)	100W	15W	19W	32W	150W	15W	19W	32W					
LUMENS	843	1113	1874	2631	1234	1121	1882	2994					
4.	CRD	C03	C06	C12	C18	C24	C36	C48	C60				
MOUNTING	120"(305CM) DROP CORD	3"(8CM) STEM MOUNT	6"(15CM) STEM MOUNT	12"(31CM) STEM MOUNT	18"(46CM) STEM MOUNT	24"(61CM) STEM MOUNT	36"(91CM) STEM MOUNT	48"(122CM) STEM MOUNT	60"(152CM) STEM MOUNT				
5.	BC				WC								
CORD	BLACK DROP CORD				WHITE DROP CORD								
6.	---		30K		35K		40K						
LED CCT	NONE		3000K		3500K		4000K						
7.	120			277			347						
VOLTAGE	120V			277V			347V						
8.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART			F04	F05	F15	F16	F09	F31	F18			
FINISH													
				F06	F07	F08	F10	F11	F13	F14	F21	F22	F24
				CLAY BROWN	ZEUS BROWN	MIDNIGHT BLUE	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUM
				F25	F26	F28	F32	F33	F38	F39	F40	F41	F45
	MELTED GOLD	MELTED COPPER	DARK CAMPAGNE	BRONZE METALLIC	PYRITE BRONZE	MEADOW GREEN	AQUA BLUE	BUBBLE PINK	ELECTRIC PURPLE	COPPER METALLIC			
9.	---				DIML								
DIMMING	NONE				LED DIMMING (0 - 10V, CURRENT - SINKING)								
10.	---			EMR			EMCR						
EMERGENCY ²	NONE			REMOTE			REMOTE COLD PACK						
11.	---			BL			ACC						
MOUNTING ³ ACCESSORIES	NONE			CEILING SLOPE ADAPTER FOR STEM MOUNT (30°)			AIRCRAFT CABLE FOR DROP CORDS						
12.	---			BFL			GLS						
ACCESSORIES	NONE			ANTI - GLARE BAFFLE			GLASS LENS						


1. INCANDESCENT AND METAL HALIDE SYSTEMS, AND THOSE USING THE 17 LED PAR 38 LAMPS, USES A MEDIUM BASE SOCKET (E26)

2. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

3. MAY REQUIRE TO COMPLY WITH LOCAL SEISMIC/EARTHQUAKE CODE

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

CYP

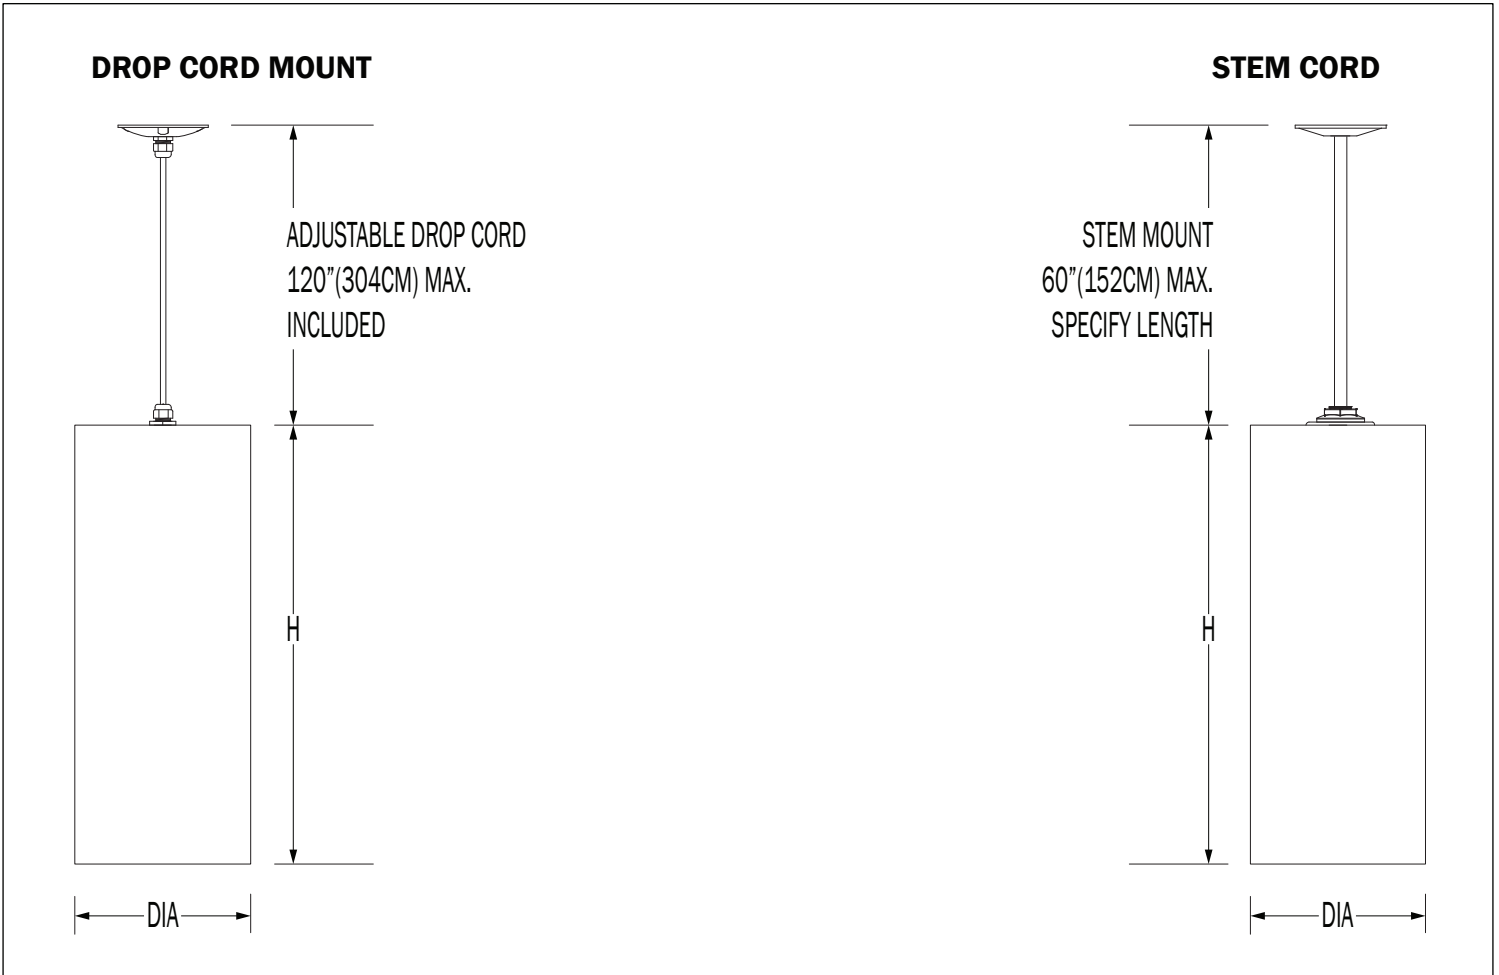

SIZE	DIAMETER (DIA)	HEIGHT (H)	WEIGHT (LBS)
CYP - 6	6" (15CM)	15" (38CM)	6.75
CYP - 8	8" (20CM)	18" (46CM)	9.5

CUSTOM


NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

DIRECT

PN	SIZE (DIA)	ILLUMINATION	ACCESSORIES	LUMENS	WATTAGE
CYP	6	100 IN	---	843	100
		15 LED	GLS	711	17
			BFL	1054	17
		19 LED	---	1113	17
			GLS	1323	22
			BFL	1814	22
			---	1874	22
		32 LED	GLS	1805	36
			BFL	2631	36
			---	2949	36
			---	1234	150
		8	150 IN	---	840
	15 LED		BFL	1096	17
			---	1121	17
			---	1462	22
	19 LED		BFL	1861	22
			---	1882	22
			---	2143	36
	32 LED		BFL	2858	36
			---	2994	36
---			2994	36	

IES INDOOR REPORT
PHOTOMETRIC FILENAME : CYP6 15LED GLS.IES

POLAR GRAPH

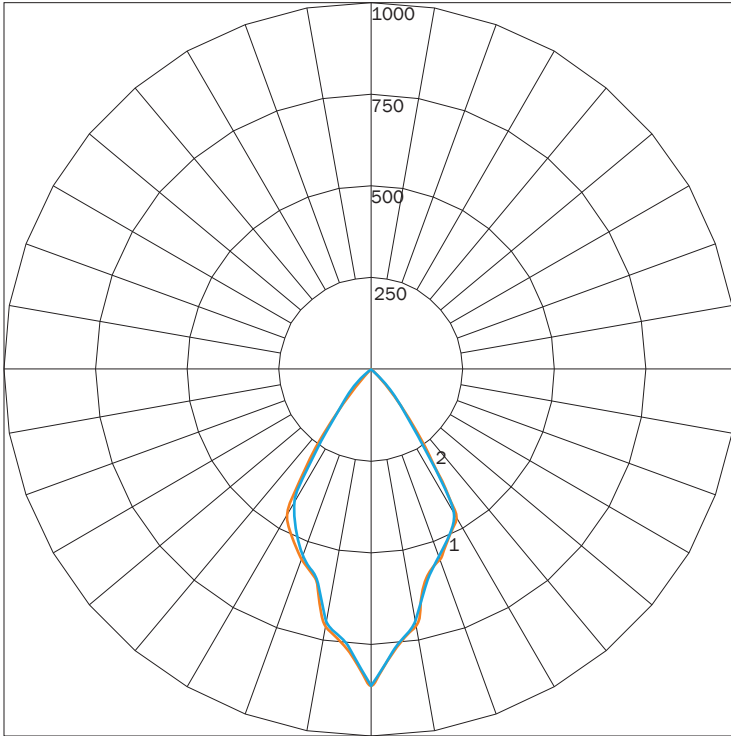


MAXIMUM CANDELA = 862.42 - LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	711
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	41
TOTAL LUMINAIRE WATTS	17

IES INDOOR REPORT
PHOTOMETRIC FILENAME : CYP8 32LED.IES

POLAR GRAPH

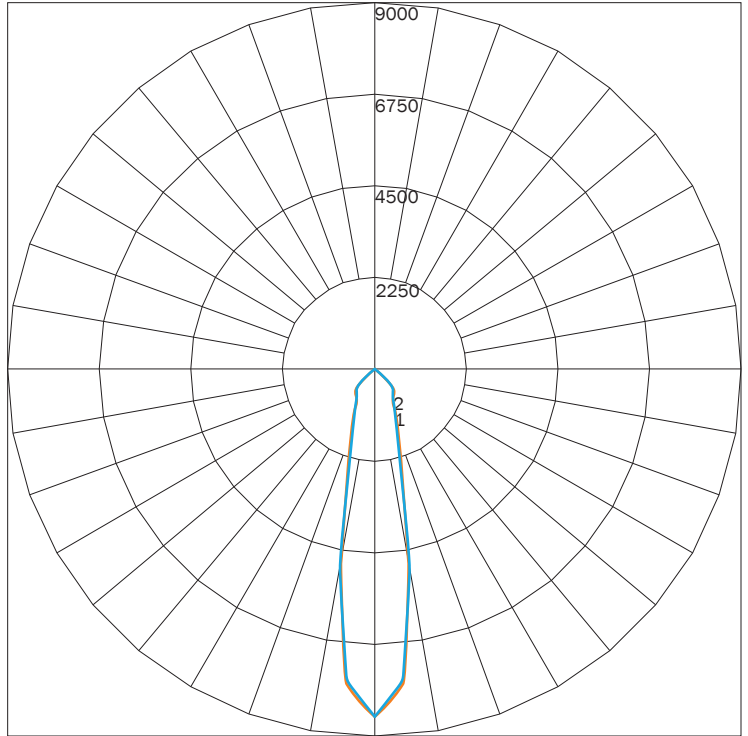

MAXIMUM CANDELA = 8523.55 - LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	2994
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	82
TOTAL LUMINAIRE WATTS	36

FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F15
MATTE
BLACK



F16
GLOSS
BLACK



F09
PEWTER



F31¹
SILVER
METALLIC



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE

PREMIUM FINISHES



F40
BUBBLE
PINK



F10
FIRE
RED



F41
ELECTRIC
PURPLE



F08
MIDNIGHT
BLUE



F39
AQUA
BLUE



F13
FOREST
GREEN



F38
MEADOW
GREEN



F45
COPPER
METALLIC



F06
CLAY
BROWN



F11
CITRUS
ORANGE



F28¹
DARK
CHAMPAGNE



F22¹
HARVEST
GOLD



F14
SUNSHINE
YELLOW



F33¹
PYRITE
BRONZE



F07
ZEUS
BROWN




F32¹
BRONZE
METALLIC



F26¹
MELTED
COPPER



F25¹
MELTED
GOLD



F24¹
MELTED
PLATINUM



F44¹
FAUX
COPPER



F43¹
FAUX
GOLD



F42¹
FAUX
CHROME



RAL
CUSTOM
(RAL #)

1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE. MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.