PHANTOM 5[™] PENDANT

PROJECT:	
TYPE:	
OLIANTITY:	



PN: 3005PH

APPLICATION	PENDANT MOUNTINDOOR RATED
DIMENSION	• 8"DIA X 61"H OR 75"H (23CM X 155CM OR 191CM)
ILLUMINATION	DIFFUSELED 90CRI6,367 - 9,439 LUMENS
ELECTRICAL	120V, 277V, AND 347V10kA SURGE SUPRESSION STANDARD
DIFFUSERS	OPAL - WHITE ACRYLIC
MOUNTING	STEM MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	 AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING (1%)
EMERGENCY	• REMOTE





PHANTOM 5TM PENDANT

PROJECT: _	
TYPE: _	
OHANTITY:	
QUANTITI	

75

3005PH				_				_	_
0000111	1	2	3	4	5	6	7	8	9

61

SIZE	61"H X 8"DIA (1	155CM X 20CM)	75"H X 8"DIA (1	L91CM X 20CM)	
2.	78	LED	112	LED	
ILLUMINATION	78W	/ LED	112W LED		
LED (W)	96W	114W	129W	146W	
LUMENS	6367	7411 W/DLED	8377	9439 W/DLED	

3.	30К	35K	40K
LED CCT	3000К	3500K	4000K

4.		DLED
DOWNLIGHT	NONE	15W LED DOWNLIGHT

5.	120	277	347
VOLTAGE	120V	277V	347V

6.	SN	SB	ВС	СН	PB	F05	F09	F16	F19	F24
	SATIN NICKEL	SATIN BRASS	BLACK CHROME	CHROME	POLISHED BRASS	WHITE	PEWTER	GLOSS BLACK	MIRROR SILVER	MELTED PLATINUM
FINISH	F25	F26	F31	F32	F33	RAL				
	MELTED GOLD	MELTED COPPER	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)				


7.	OP OP
DIFFUSER	OPAL - WHITE ACRYLIC

8.		DIML
DIMMING	NONE	LED DIMMING (1 - 10V, CURRENT - SINKING)
9.		EMR
EMERGENCY ¹	NONE	REMOTE


^{1. 10}W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

PHANTOM 5[™] PENDANT


3005PH - 61"

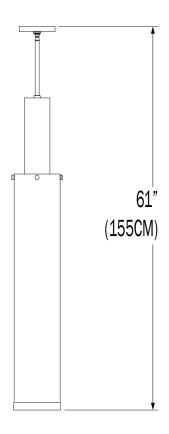

3005PH - 75"

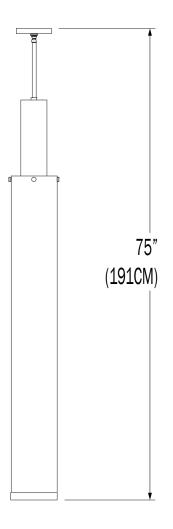

BOTTOM



PHANTOM 5[™] PENDANT

DIFFUSE W/ DIRECT

PN	SIZE (HEIGHT)	DOWNLIGHT	LUMENS	WATTAGE
	61D		6367	97
3005PH		DLED	7411	114
3005FH	750		8377	129
75D	750	DLED	9439	146


IES INDOOR REPORT

PHOTOMETRIC FILENAME: 3005PH 61 84LED F05.IES

IES INDOOR REPORT


PHOTOMETRIC FILENAME: 3005PH 75 112LED DLED F05.IES

POLAR GRAPH

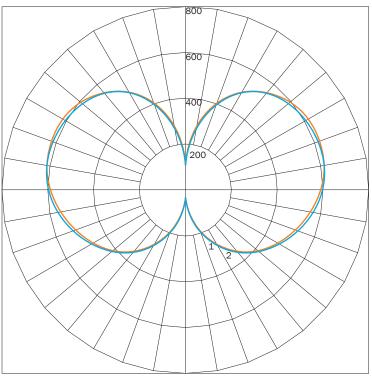

MAXIMUM CANDELA = 636.11 LOCATED AT HORIZONTAL ANGLE = 45, VERTICAL ANGLE = 110 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

POL	AR	GR	AΡ	н

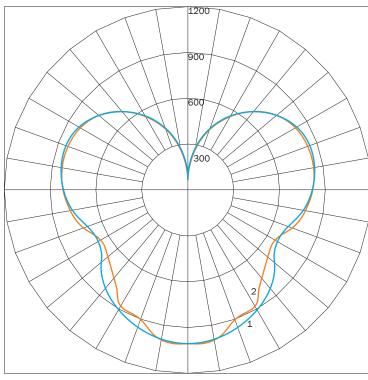

MAXIMUM CANDELA = 1079.69 LOCATED AT HORIZONTAL ANGLE = 45, VERTICAL ANGLE = 5 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	6367	LUMINAIRE LUMENS	9439
TOTAL LUMINAIRE EFFICIENCY	NA	TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	66	LUMINAIRE EFFICACY RATING	65
TOTAL LUMINAIRE WATTS	97	TOTAL LUMINAIRE WATTS	146

PHANTOM 5TM PENDANT

AVAILABLE FINISHES



SN SATIN NICKEL



SB SATIN BRASS



CH CHROME



BC BLACK CHROME



PB POLISHED BRASS



F05 GLOSS WHITE



F09 PEWTER



F16 GLOSS BLACK



F19 MIRROR SILVER



F24 MELTED PLATINUM



F25 MELTED GOLD



F26 MELTED COPPER



F31 SILVER METALLIC



F32 METALLIC BRONZE



F33 PYRITE BRONZE



RAL CUSTOM COLOR (RAL #)