PROJECT:	
TYPE:	
01144ITITY	



## PN: 3007PH

APPLICATION	<ul><li>PENDANT MOUNT</li><li>INDOOR RATED</li></ul>
DIMENSION	• 9"DIA X 42"H, 54"H, OR 66"H (23CM X 107CM, 137CM, OR 168CM)
ILLUMINATION	<ul><li>DIFFUSE</li><li>LED 90CRI</li><li>3,905 - 8,854 LUMENS</li></ul>
ELECTRICAL	<ul><li>120V, 277V, AND 347V</li><li>10kA SURGE SUPRESSION STANDARD</li></ul>
DIFFUSERS	OPAL - WHITE ACRYLIC
MOUNTING	STEM MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	<ul> <li>AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES</li> <li>CUSTOM RAL FINISHES AVAILABLE</li> </ul>
DIMMING	• 0 - 10V STANDARD DIMMING (1%)
EMERGENCY	• REMOTE





PROJECT:	
TYPE:	
QUANTITI.	

3007PH									-
	1	2	3	4	5	6	7	8	9

1.	42		5	54	66		
SIZE	42"H X 9"DIA (107CM X 23CM)		54"H X 9"DIA (:	137CM X 23CM)	66"H X 9"DIA (168CM X 23CM)		
2.	52LED		78LED		112LED		
ILLUMINATION	52W LED		78W LED		112W LED		
LED (W)	59W	74W	89W	89W 106W		145W	
LUMENS	3905	4958 <b>W/DLED</b>	5875	5875 7059 <b>W/DLED</b>		8854 <b>W/DLED</b>	
3.	30К		35К		40K		
LED CCT	3000K		3500К		4000K		

4.		DLED
DOWNLIGHT	NONE	15W LED DOWNLIGHT

5.	120	277	347
VOLTAGE	120V	277V	347V

6.	F05	F09	F16	F18	F19	F24	F25	F26	F31	F32
	WHITE	PEWTER	GLOSS BLACK	SATIN ALUMINUM	MIRROR SILVER	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	BRONZE METALLIC
FINISH	F33	RAL								
	PYRITE BRONZE	CUSTOM (SPECIFY)								


7.	ОР
DIFFUSER	OPAL - WHITE ACRYLIC

8.		DIML
DIMMING	NONE	LED DIMMING (1 - 10V, CURRENT - SINKING)
9.		EMR
EMERGENCY <sup>1</sup>	NONE	REMOTE


<sup>1. 10</sup>W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

EMERGENCY<sup>1</sup>


## 3007PH - 42"

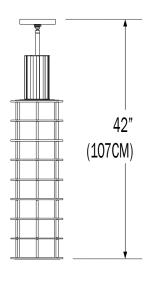


## 3007PH - 54"

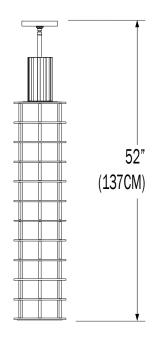

## 3007PH - 66"

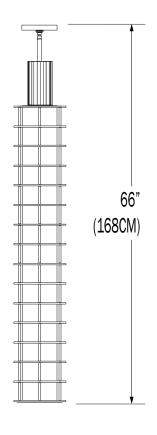

### **BOTTOM**




### **DIFFUSE W/ DIRECT**

PN	SIZE (HEIGHT)	DOWNLIGHT	LUMENS	WATTAGE	
3007РН	42D		3905	59	
		DLED	4958	74	
	54D 66D		5875	89	
		340	DLED	7059	106
			7772	127	
		DLED	8854	145	

**IES INDOOR REPORT** 

PHOTOMETRIC FILENAME: 3007PH 42 52LED.IES

#### **POLAR GRAPH**

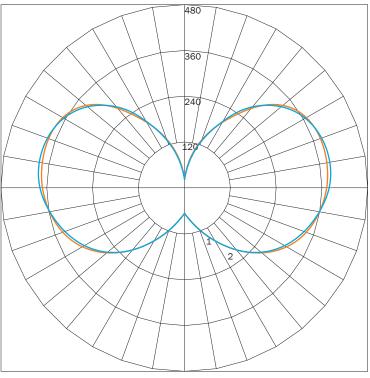


MAXIMUM CANDELA = 427.61 LOCATED AT HORIZONTAL ANGLE = 135, VERTICAL ANGLE = 100 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

#### **IES INDOOR REPORT**

PHOTOMETRIC FILENAME: 3007PH 66 112LED DLED.IES

#### **POLAR GRAPH**

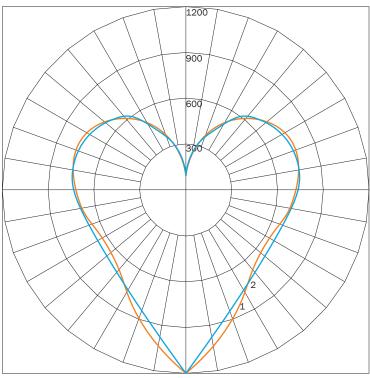

MAXIMUM CANDELA = 1199.31 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

3905	LUMINAIRE LUMENS	8854
NA	TOTAL LUMINAIRE EFFICIENCY	NA
66	LUMINAIRE EFFICACY RATING	61
59	TOTAL LUMINAIRE WATTS	145

## **AVAILABLE FINISHES**



F05 GLOSS WHITE



F09 PEWTER



F16 GLOSS BLACK



F18 SATIN ALUMINUM



F19 MIRROR SILVER



F24 MELTED PLATINUM



F25 MELTED GOLD



F26 MELTED COPPER



F31 SILVER METALLIC



F32 METALLIC BRONZE



F33 PYRITE BRONZE



CUSTOM COLOR (RAL #)