

PONTE™ PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: 490PO

APPLICATION	<ul style="list-style-type: none">• PENDANT MOUNT• INDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 70" L X 2" W (178CM X 5CM)
ILLUMINATION	<ul style="list-style-type: none">• DIRECT• LED 90CRI• 3,500 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120 - 277V• 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES
CONSTRUCTION	<ul style="list-style-type: none">• STEEL
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SPECIALTY, SEVERAL TMS PLATED, AND POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING (1%)



PONTE™ PENDANT



PROJECT: _____

TYPE: _____

QUANTITY: _____

490PO



1 2 3 4 5 6 7

1.	3LED10									
ILLUMINATION	10 X 3W LED									
LED (W)	30W									
LUMENS	3,500									
2.	30K			35K			40K			
LED CCT	3000K			3500K			4000K			
3.	120					277				
VOLTAGE	120V					277V				
4.	BC					WC				
CORD	BLACK DROP CORD					WHITE DROP CORD				
5.	PB	SN	CH	BC	AC	AB	SB	F04	F05	F09
FINISH	POLISHED BRASS	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUE COPPER	ANTIQUE BRASS	SATIN BRASS	MATTE WHITE	GLOSS WHITE	PEWTER
	F15	F16	F18	F21	F31	F32	F33	RAL		
	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)		
6.	---					DIML				
DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)				
7.	---					EMR				
EMERGENCY ²	NONE					REMOTE				

1. 10W AT 90 MINUTES. EMERGENCY (EMR) OPTION ILLUMINATES MAX OF 4 FT.

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

490PO

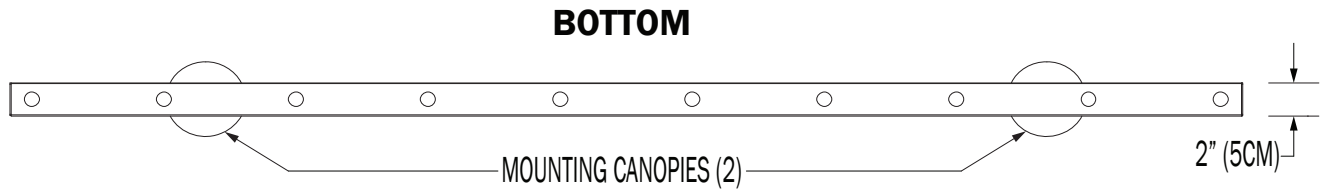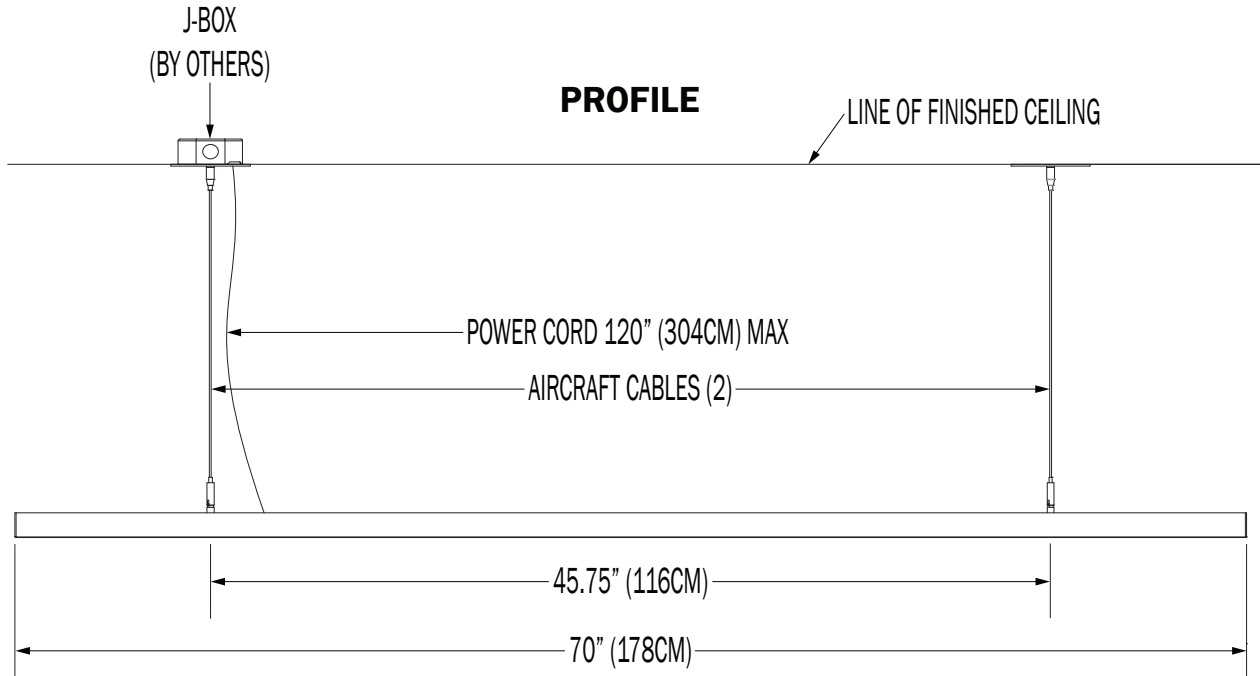


DIRECT

PN	ILLUMINATION	FINISH	LUMENS	WATTAGE
490PO	3LED10	F31	7	30
	3LED10	F05	13	30

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 490PO 3LED10 F05 IES

POLAR GRAPH

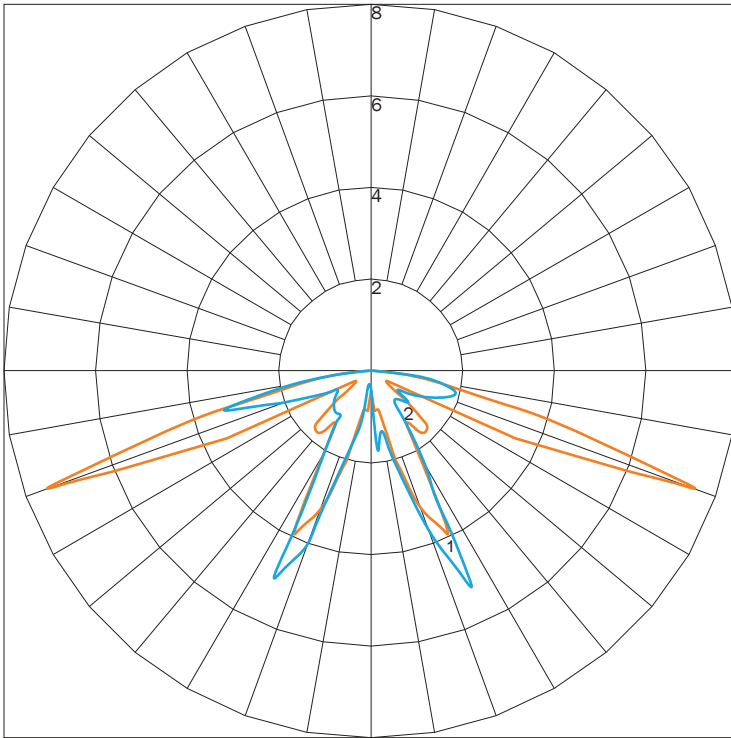

MAXIMUM CANDELA = 7.25 LOCATED AT HORIZONTAL ANGLE = 90, VERTICAL ANGLE = 70
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

TOTAL LUMINAIRE EFFICIENCY

LUMINAIRE EFFICACY RATING

TOTAL LUMINAIRE WATTS

7

NA


0

33

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 490PO 3LED10 F31 IES

POLAR GRAPH

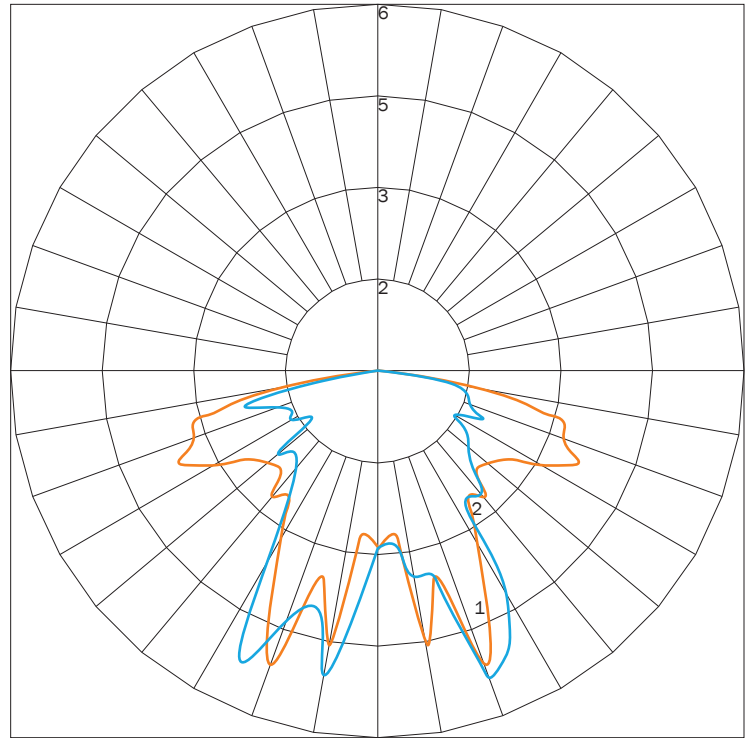

MAXIMUM CANDELA = 5.62 LOCATED AT HORIZONTAL ANGLE = 165, VERTICAL ANGLE = 20
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

TOTAL LUMINAIRE EFFICIENCY

LUMINAIRE EFFICACY RATING

TOTAL LUMINAIRE WATTS

NA

0

33

AVAILABLE FINISHES



PB
POLISHED
BRASS



SN
SATIN
NICKEL



CH
CHROME



BC
BLACK
CHROME



AC
ANTIQUÉ
COPPER



AB
ANTIQUÉ
BRASS



SB
SATIN
BRASS



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE




F31
SILVER
METALLIC



F32
METALLIC
BRONZE



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.