

SAUREL 2™ SCONCE

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: SA835

APPLICATION	<ul style="list-style-type: none">• SCONCE MOUNT• INDOOR OR OUTDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 15"H (38CM)• DEPTH: 6.5" (17CM)
ILLUMINATION	<ul style="list-style-type: none">• DIFFUSE• LED 90CRI• 888 - 1,302 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120V, 277V AND 347V• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING



DIFFUSE



SAUREL 2™ SCONCE

PROJECT: _____

TYPE: _____

QUANTITY: _____

SA835

1 2 3 4 5 6 7 8

1.	I	O
APPLICATION	INDOOR	OUTDOOR

2.	ILLUMINATION	
	21LED	
LED (W)	21W	
LUMENS	1302	

3.	30K	35K	40K
LED CCT	3000	3500	4000

4.	120	277	347
VOLTAGE	120V	277V	347V

5.	F04	F05	F09	F15	F16	F18	F24	F25	F26	F31
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC
	F33	RAL								
	PYRITE BRONZE	CUSTOM (SPECIFY)								

6.	OP	SD
DIFFUSER	OPAL - WHITE ACRYLIC	SAND - BLASTED WHITE ACRYLIC


7.	---	DIML
DIMMING ¹	NONE	LED DIMMING (0 - 10V, CURRENT-SINKING)

8.	---	EMR	EMCR
EMERGENCY ²	NONE	REMOTE	REMOTE COLD PACK


1. USE CURRENT - SINKING DIMMING SYSTEM (BY OTHERS) FOR LED DIMMING. COMPATIBILITY OF THIS PRODUCT IS NOT GUARANTEED WITH ALL CONTROL SYSTEMS
 2. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.


TOP

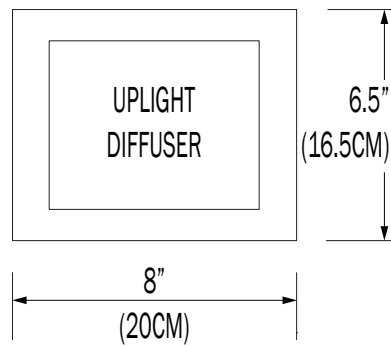


FRONT

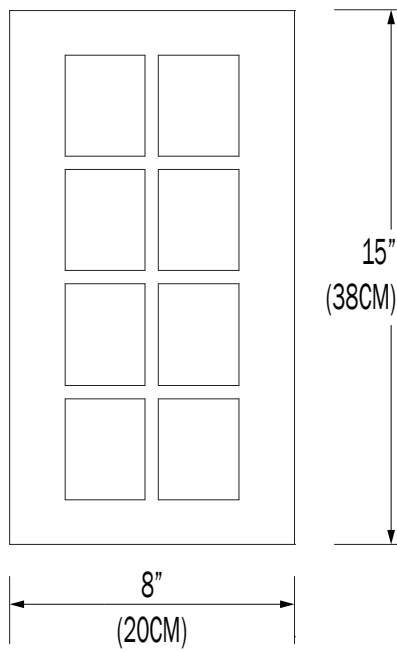

PROFILE

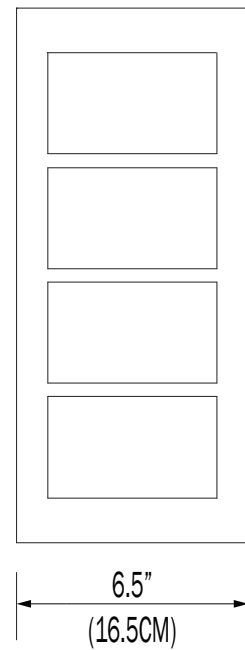

BOTTOM

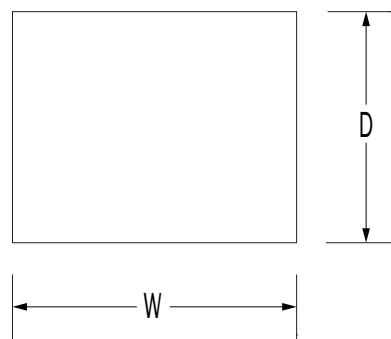


DIFFUSE

PN	ILLUMINATION	DIFFUSER	FINISH	LUMENS	WATTAGE
SA835	21LED	OP	F15	888	21
			F05	1302	21

IES INDOOR REPORT

PHOTOMETRIC FILENAME : SA835 21LED F15 OP.IES

POLAR GRAPH

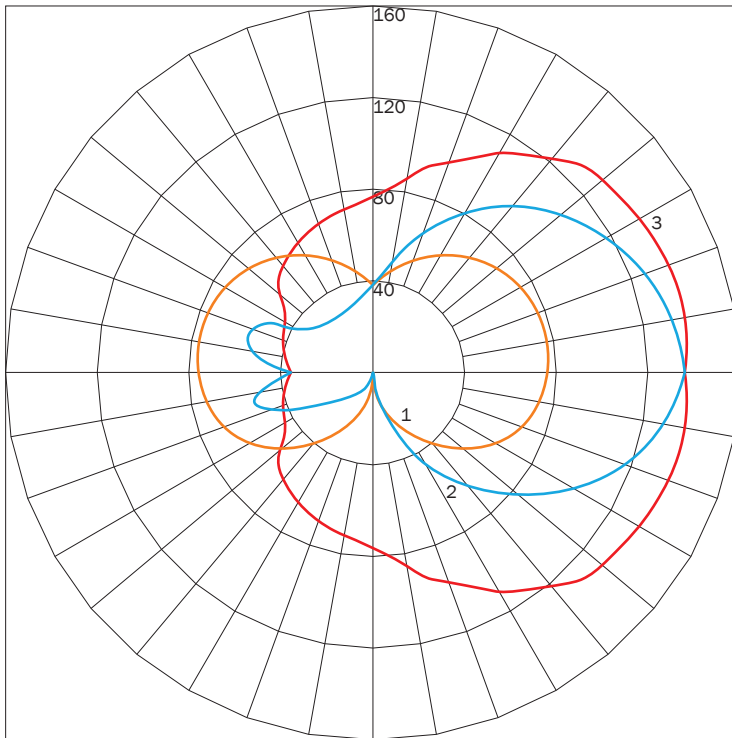

MAXIMUM CANDELA = 139.89 LOCATED AT HORIZONTAL ANGLE = 15, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS

888

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

35


TOTAL LUMINAIRE WATTS

25

IES INDOOR REPORT

PHOTOMETRIC FILENAME : SA835 21LED F05 OP.IES

POLAR GRAPH

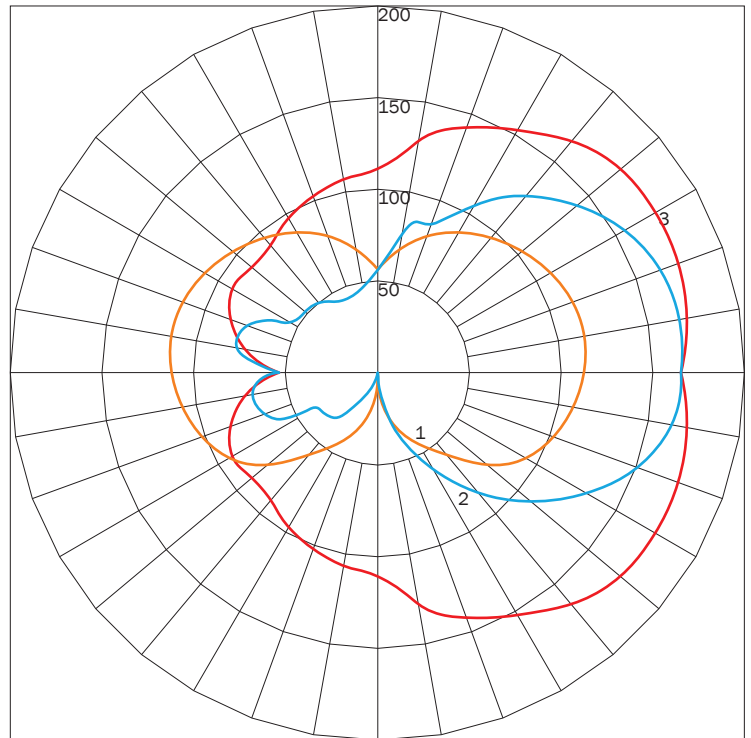

MAXIMUM CANDELA = 180.35 LOCATED AT HORIZONTAL ANGLE = 15, VERTICAL ANGLE = 100
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS

1302

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

52

TOTAL LUMINAIRE WATTS

25

AVAILABLE FINISHES



F04
GLOSS
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.