

SERENITY EZRA™ CEILING

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: EZ831

APPLICATION	<ul style="list-style-type: none">• CEILING MOUNT• INDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 24" - 48" DIA. (61CM - 122CM)
ILLUMINATION	<ul style="list-style-type: none">• DIRECT• LED 90CRI• 3,370 - 5,875 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120 - 347V• 6KV SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING
WEIGHT	<ul style="list-style-type: none">• 33 LBS MAX



DIRECT

SERENITY EZRA™ CEILING



PROJECT: _____

TYPE: _____

QUANTITY: _____


EZ831

1 2 3 4 5 6 7


1.	24			36			48			
DIA	24" DIA. (61CM)			36" DIA. (91CM)			48" DIA. (122CM)			
2.	40LED			60LED			75LED			
ILLUMIN	40W LED			60W LED			75W LED			
	40IN4			60IN6						
	4X40W INCANDESCENT			6X60W INCANDESCENT						
3.	30K			35K			40K			
LED CCT	3000K			3500K			4000K			
4.	120			227			347			
VOLT	120V			227V			347V			
5.	SN	CH	BC	AC	AB	SB	PB	F05	F16	F33
FINISH	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUÉ COPPER	ANTIQUÉ BRASS	SATIN BRASS	POLISHED BRASS	GLOSS WHITE	GLOSS BLACK	PYRITE BRONZE
	RAL									
	CUSTOM (SPECIFY)									
6.	OP					SD				
DIFFUSER	OPAL-WHITE ACRYLIC					SAND-BLASTED, WHITE ACRYLIC				
7.	DIML									
DIMMING	Standard 0-10V									

1. 127V - 277V AVAILABLE


SERENITY EZRA™ CEILING

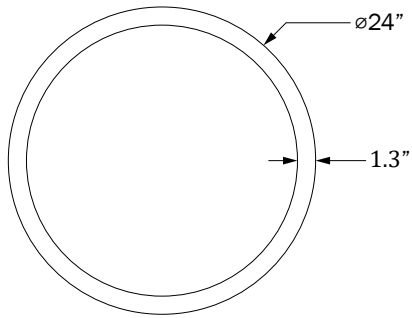



24

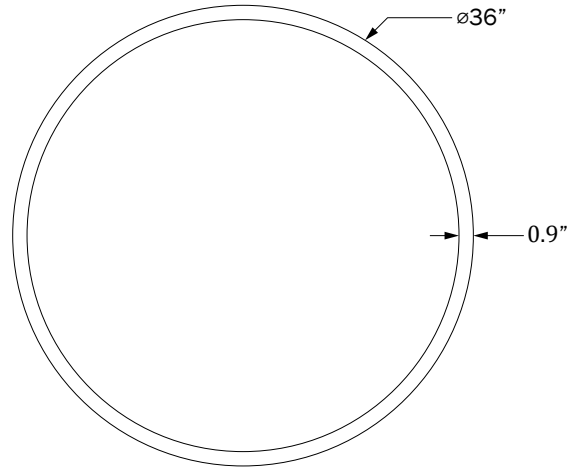

36

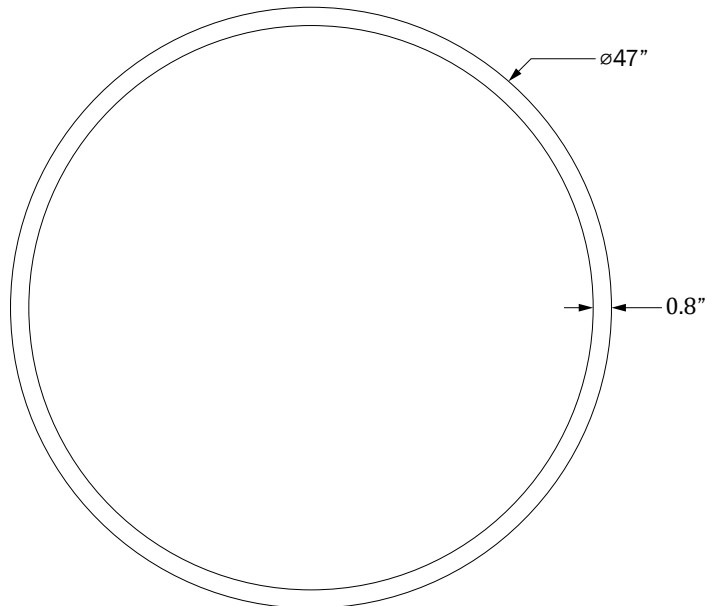

48

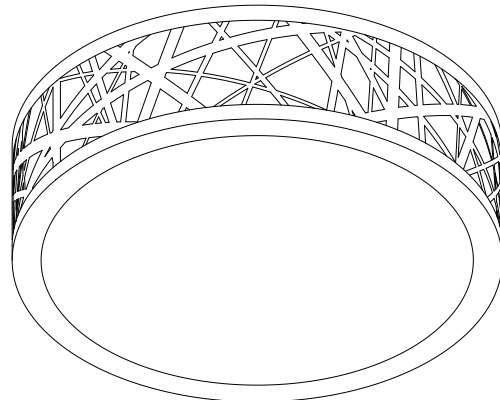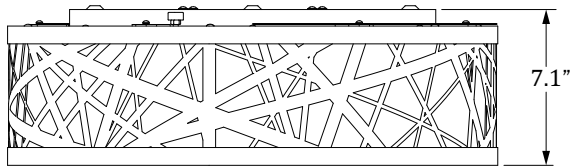

SERENITY EZRA™ CEILING


DIRECT

PN	WATTAGE	LUMENS	WEIGHT
24	41	3370	11
36	59	5108	22
48	79	6875	33

IES INDOOR REPORT

PHOTOMETRIC FILENAME : EZ831 24 40LED 35K F05.IES

POLAR GRAPH

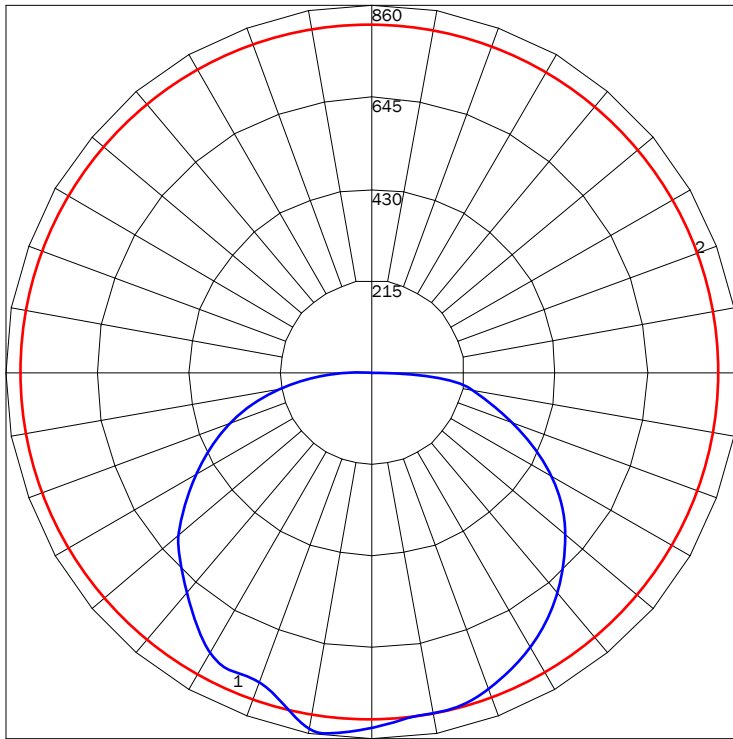


MAXIMUM CANDELA = 859.72 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 10
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (10) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 3370
TOTAL LUMINAIRE EFFICIENCY 54%
LUMINAIRE EFFICACY RATING 82
TOTAL LUMINAIRE WATTS 41

IES INDOOR REPORT

PHOTOMETRIC FILENAME : EZ831 48 75LED 35K F05.IES

POLAR GRAPH

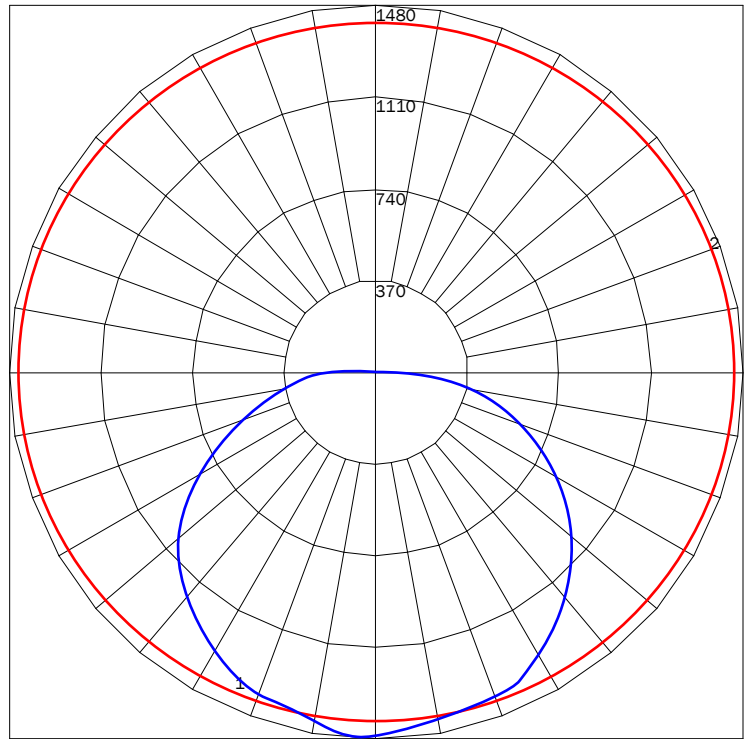

MAXIMUM CANDELA = 2479.53 LOCATED AT HORIZONTAL ANGLE = 157.5, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (157.5 - 337.5) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS 5875
TOTAL LUMINAIRE EFFICIENCY 54%
LUMINAIRE EFFICACY RATING 75
TOTAL LUMINAIRE WATTS 79

SERENITY EZRA™ CEILING

FINISHES



F04
MATTE
WHITE




F05
GLOSS
WHITE



F16
GLOSS
BLACK



F33¹
PYRITE
BRONZE



RAL
CUSTOM
(RAL #)

PREMIUM PLATED




SN
SATIN
NICKEL




CH
CHROME




BC
BLACK
CHROME



AC
ANTIQU
COPPER



AB
ANTIQU
BRASS



SB
SATIN
BRASS



PB
POLISH
ED
BRASS

1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE. MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.

TMSLIGHTING