PROJECT: ______ TYPE: ____ QTY: ____





PRODUCT#	502SICL
APPLICATION	CEILING MOUNT INDOOR RATED
DIMENSIONS	• 12", 18", 24", AND 36" (30CM, 45.7CM, 61CM, AND 91CM)
ILLUMINATION	• DIRECT • LED 90 CRI • 1,492 - 4,965 LUMEN RANGE
LED DRIVER	• CANOPY OR REMOTE
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	• CEILING MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0-10V STANDARD DIMMING (1%)
WEIGHT	• 20 LBS 30 LBS.









PROJECT: TYPE: QTY:

502SICL	_	-	-	-	_			-
	1	2	3	4	5	6	7	8

1.	12	18	24	36
DIA	12" (30.4CM)	18" (45.7CM)	24" (60.9CM)	36" (91.4CM)
WATTAGE	20W	30W	40W	60W
LUMENS	1492	2157	2981	4965
2.	Н	М	L	C :1
OUTPUT	100% LUMENS	75% LUMENS	50% LUMENS	[CUSTOM]% LUMENS

3.	30К	35K	40K
CCT	3000	3500	4000

4.	120	277	347
VOLTAGE ²	120V	277V	347V

i	6,	F04	F05	F10		F14		F15		00
	FINISH	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM
	5.			F04	F05	F15	F16	F09	F31	F18

6.	F04	F05	F10	F14	F15	00
INTERIOR FINISH	MATTE WHITE	GLOSS WHITE	FIRE RED	SUNSHINE YELLOW	MATTE BLACK	SAME AS OUTSIDE

7.	DIML	DIML	DIME	DIMV
DIMMING ³	0-10V(1%) (120-277V)	0-10V (10%) (347V)	LUTRON HI-LUME (1%) (120-277V)	LINE VOLTAGE/TRIAC/ELV (120V ONLY)

8.	EMR ⁴
EMERGENCY	REMOTE

^{1.} CUSTOM PERCENTAGE I.E. 60%. CONSULT AGENT.


^{2. 347}V NOT AVAILABLE WITH DIME DIMMING OPTION.

^{3.} FOR DALI AND OTHER DIMMING OPTIONS, CONSULT FACTORY.


^{4.} REMOTE EMERGENCY 6W @ 90 MINUTES.


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.






MOUNTING





REMOTE (EMERGENCY DRIVE)




REMOTE LED DRIVER BOX

NOTE: J-BOX BY OTHERS







SIYA - 12" DIA.




SIYA - 18" DIA.



SIYA - 24" DIA.



SIYA - 38" DIA.





DIRECT LIGHTING

SIZE	LUMENS H:	100%	ı	M: 75%	ī	L: 50%
12	H: 1492 @ 20W	M:	1119	@ 15W	ı	L: 746 @ 10W
18	H: 2157 @ 30W	M:	1617	@ 23W	1	L: 1079 @ 15W
24	H: 2981 @ 40W	M:	2236	@ 30W	1	L: 1492 @ 20W
36	H: 4965 @ 60W	M:	3724	@ 45W		L: 2483 @ 30W

IES INDOOR REPORT

PHOTOMETRIC FILENAME: 502SI 12 20LED 35K F05.IES

IES INDOOR REPORT

PHOTOMETRIC FILENAME: 502SI 36 60LED 35K F05.IES


POLAR GRAPH

550

MAXIMUM CANDELA = 733.89 LOCATED AT HORIZONTAL ANGLE = 45, VERTICAL ANGLE = 10 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (10) (THROUGH MAX. CD.)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFECIENCY RATING
TOTAL LUMINAIRE WATTS

POLAR GRAPH

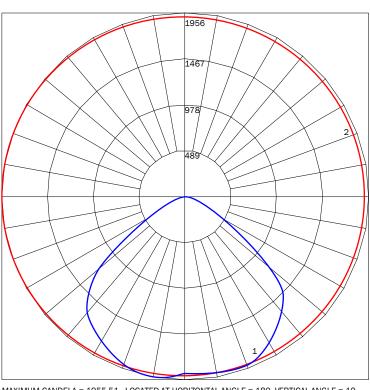

MAXIMUM CANDELA = 1955.51 LOCATED AT HORIZONTAL ANGLE = 180, VERTICAL ANGLE = 10 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (180 - 0) # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (10) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	6671
TOTAL LUMINAIRE EFFICIENCY	74%
LUMINAIRE EFFECIENCY RATING	81
TOTAL LUMINAIRE WATTS	60

CEILING

STANDARD

SIYA™



F04 MATTE WHITE



F05 GLOSS WHITE



F15 MATTE BLACK



F16 GLOSS BLACK



F09 PEWTER



F31¹ SILVER METALLIC



F18 SATIN ALUMINUM



F21 ARCH BRONZE

PREMIUM



RAL CUSTOM (RAL #)



F40 BUBBLE PINK



F10 FIRE RED



F41 ELECTRIC PURPLE



F08 MIDNIGHT BLUE



F39 AQUA BLUE



F13 FOREST GREEN



F38 MEADOW GREEN



F45 COPPER METALLIC



F06 CLAY BROWN



F11 CITRUS ORANGE



F28 DARK CHAMPAGNE



F22 HARVEST GOLD



F14 SUNSHINE YELLOW



F33¹ PYRITE BRONZE



F07 ZEUS BROWN



F32¹ BRONZE METALLIC



F26 MELTED COPPER



F25 MELTED GOLD



F24 MELTED PLATINUM



F43 FAUX GOLD



F42 FAUX CHROME

ACCENT









F15 MATTE BLACK



F10 FIRE RED



00 SAME FINISH



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILAB ILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.