


PROJECT: _____

TYPE: _____


QUANTITY: _____

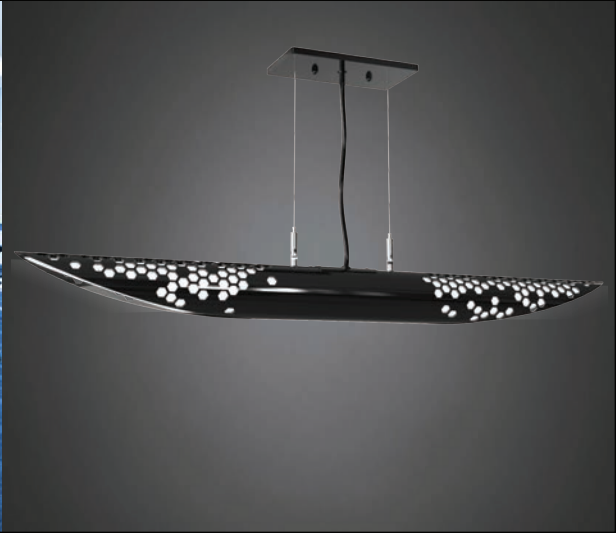

PN: 444TA

APPLICATION	<ul style="list-style-type: none">• PENDANT MOUNT• INDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 36" L X 3" H (91CM X 8CM)
ILLUMINATION	<ul style="list-style-type: none">• INDIRECT/DIRECT• LED 90CRI• 343 - 393 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120 - 277V (347V CONSULT FACTORY)• 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES
CONSTRUCTION	<ul style="list-style-type: none">• STEEL
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING
WEIGHT	<ul style="list-style-type: none">• 9 LBS MAXIMUM



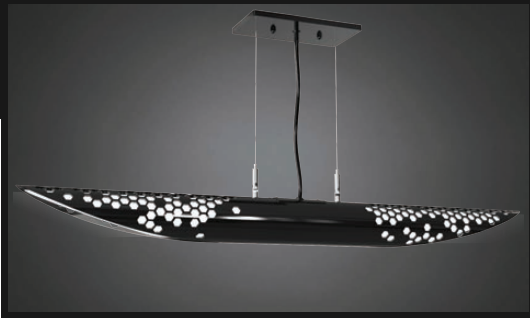

TANI™ PENDANT



PROJECT: _____
 TYPE: _____
 QUANTITY: _____

444TA

1 2 3 4 5 6

1.	ILLUMINATION									
	7LED2									
LED (W)	15W									
LUMENS	393									
2.	30K			35K				40K		
	LED CCT	3000K			3500K				4000K	
3.	120					277				
	VOLTAGE	120V					277V			
4.	BC					WC				
	CORD	BLACK DROP CORD					WHITE DROP CORD			
5.	F04	F05	F09	F15	F16	F18	F21	F31	F32	F33
	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE
	RAL									
	CUSTOM (SPECIFY)									
6.	---					DIML				
	DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)			

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

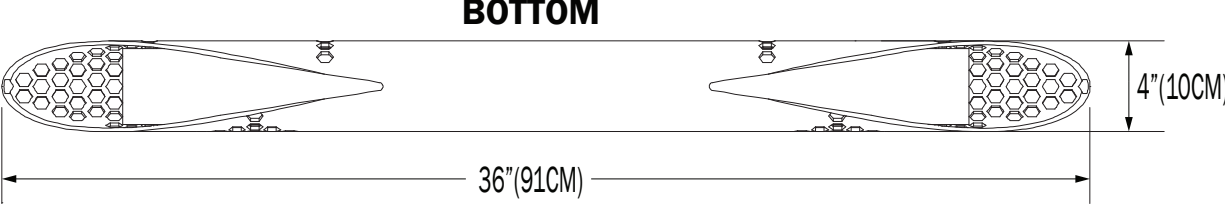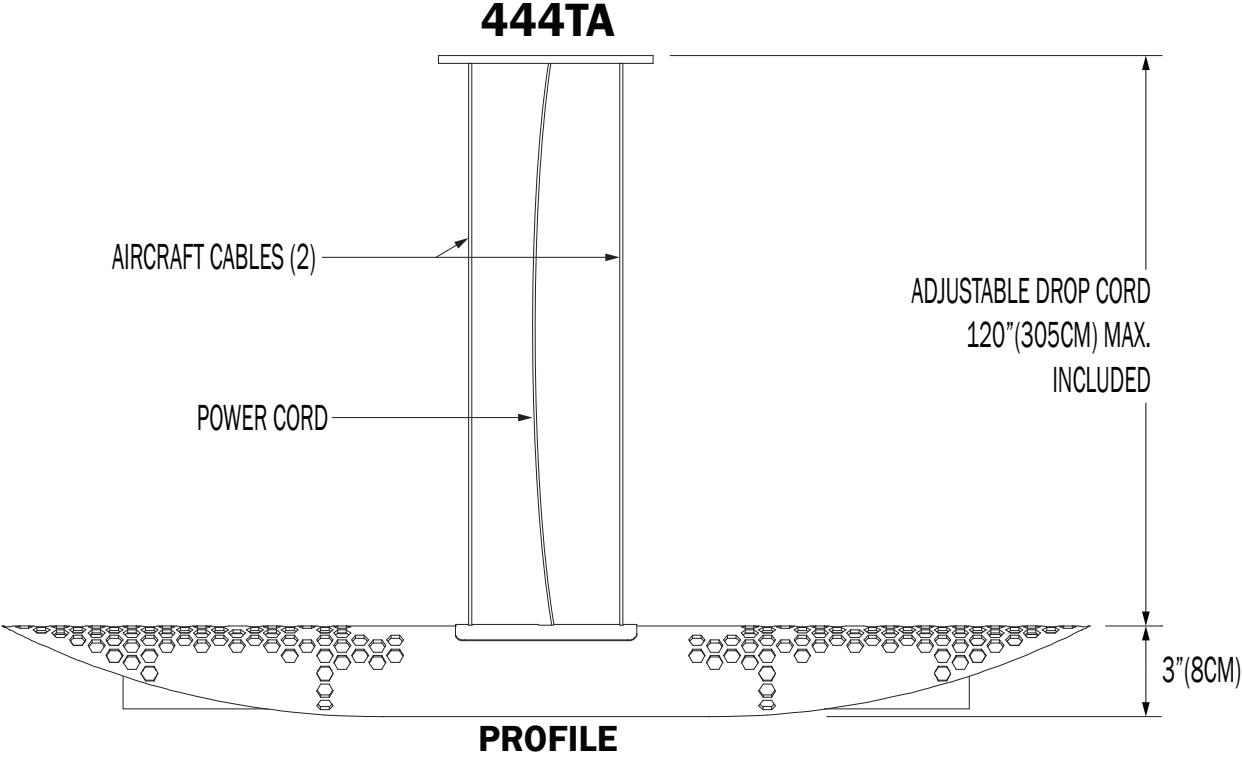

CUSTOM


NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

INDIRECT/DIRECT

PN	ILLUMINATION	LUMENS	WATTAGE
444TA	7LED2	343	15
		393	15

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 444TA 7LED2 F31.IES

POLAR GRAPH

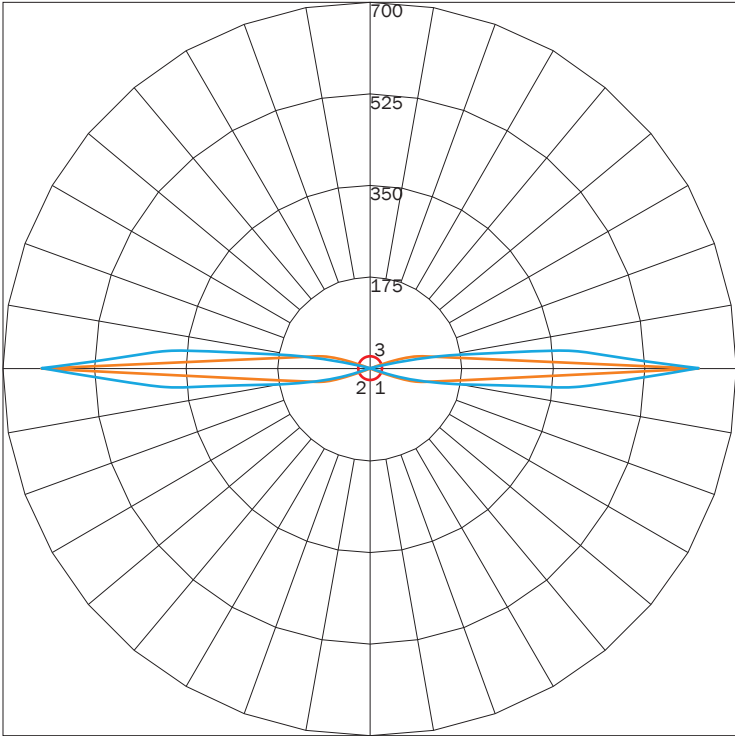


MAXIMUM CANDELA = 630.64 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS 343
TOTAL LUMINAIRE EFFICIENCY NA
LUMINAIRE EFFICACY RATING 23
TOTAL LUMINAIRE WATTS 15

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 444TA 7LED2 F05.IES

POLAR GRAPH

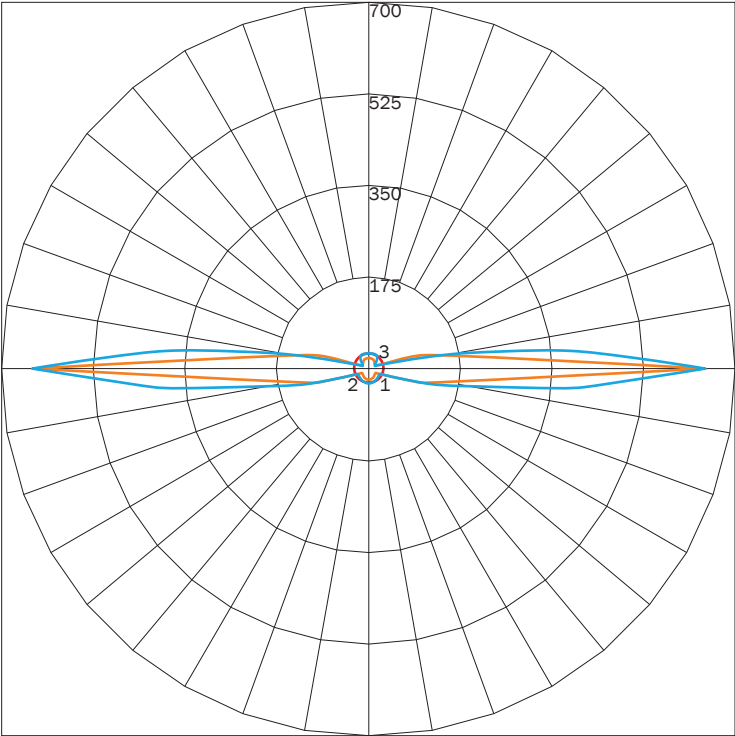

MAXIMUM CANDELA = 644.63 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS 393
TOTAL LUMINAIRE EFFICIENCY NA
LUMINAIRE EFFICACY RATING 26
TOTAL LUMINAIRE WATTS 15

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F31
SILVER
METALLIC



F32
METALLIC
BRONZE



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.