
TENI[™] CYLINDER

PROJECT:

TYPE:

QUANTITY: .

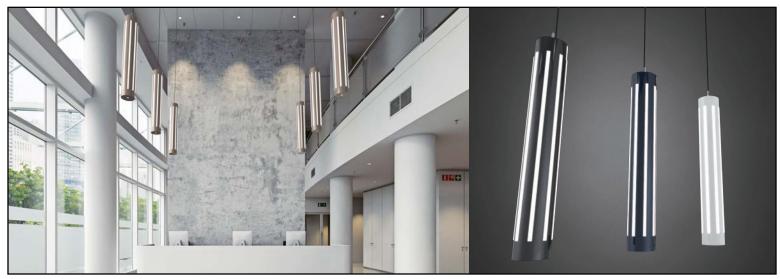

PN: 3830TE

APPLICATION	PENDANT MOUNT INDOOR RATED
DIMENSION	• 53"H X 8"D (135CM X 20CM)
ILLUMINATION	• DIFFUSE • LED 90CRI • 1,149 - 2,085 LUMENS
ELECTRICAL	 120 - 277V (347V CONSULT FACTORY) 10kA SURGE SUPRESSION STANDARD
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE
CONSTRUCTION	• STEEL
FINISHES	AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES CUSTOM RAL FINISHES AVAILABLE
DIMMING	0 - 10V STANDARD DIMMING
WEIGHT	• 17.5 LBS MAXIMUM



TMSLIGHTING







PROJECT: _____

TYPE:

QUANTITY: _____

3830TE -....- 2 3 4 5 6 7 8

1.	ILLUMINATION									
	56LED									
LED (W)		56W								
2.					DLED					
DOWNLIGHT			NONE			15W LED DOWNLIGHT				
LUMENS	1149				2085					
3.	BC				wc					
CORD	BLACK DROP CORD					WHITE DROP CORD				
4.	30K 35			5K 40K						
LED CCT	3000К 350			ООК	4000K					
5.	120						277			
VOLTAGE	120V				277V					
6.	F04	F05	F07	F08	F09	F10	F13	F14	F15	F16
	MATTE WHITE	GLOSS WHITE	ZEUS BROWN	MIDNIGHT BLUE	PEWTER	FIRE RED	FOREST GREEN		MATTE BLACK	GLOSS BLACK
FINISH	F18	F21	F24	F25	F26	F31	F32	F33	F45	RAL
	SATIN ALUMINUM	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	BRONZE METALLI		COPPER METALLIC	CUSTOM (SPECIFY)
7.						DIML				
DIMMING	NONE				LED DIMMING (0 - 10V, CURRENT - SINKING)					
8.	EN			MR EMCR						
EMERGENCY ¹	NONE REM			10TE		REM	IOTE COLD PACK			

1. 10W AT 90 MINUTES

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.











NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: https://tmslighting.com/sales-agents.html

CUSTOM



TOP/BOTTOM

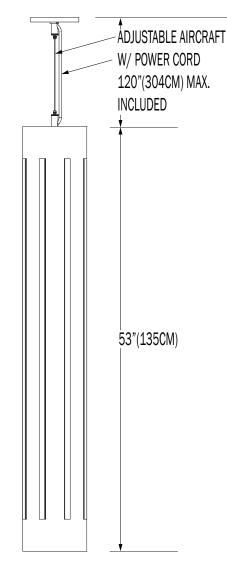



TENI[™] CYLINDER


DIFFUSE

PN	DOWNLIGHT	LUMENS	WATTAGE
3830TE		1149	56

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 3830TE 56LED F05.IES

POLAR GRAPH

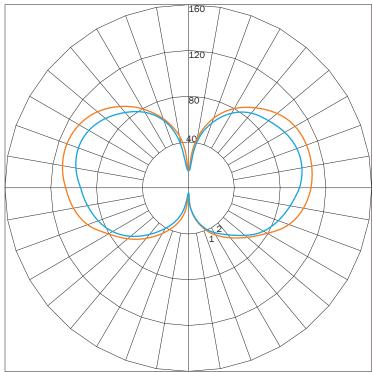

MAXIMUM CANDELA = 137.8 LOCATED AT HORIZONTAL ANGLE = 75, VERTICAL ANGLE = 105 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	1149
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	18
TOTAL LUMINAIRE WATTS	63


DIRECT

PN	DOWNLIGHT	LUMENS	WATTAGE
3830TE	DLED	2085	56 (+15W)

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 3830TE 56LED DL F05.IES

POLAR GRAPH

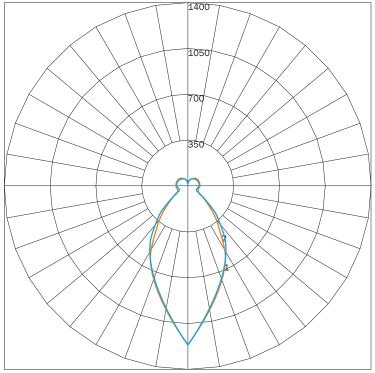

MAXIMUM CANDELA = 1213.75 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

149	LUMINAIRE LUMENS	2085
NA	TOTAL LUMINAIRE EFFICIENCY	NA
18	LUMINAIRE EFFICACY RATING	26
63	TOTAL LUMINAIRE WATTS	81





TENI[™] CYLINDER

AVAILABLE FINISHES



F04 MATTE WHITE



GLOSS WHITE



F07 ZEUS BROWN



F08 MIDNIGHT BLUE



F09 PEWTER



F13

FOREST

GREEN



F14 SUNSHINE YELLOW





F16 GLOSS BLACK







F21 ARCH BRONZE

F24 MELTED

PLATINUM



MELTED GOLD



RED

MELTED

COPPER

F31 SILVER METALLIC





BRONZE



F45 COPPER METALLIC







