


PROJECT: _____
TYPE: _____
QUANTITY: _____



PN: TSB

APPLICATION	<ul style="list-style-type: none">• SURFACE MOUNT• INDOOR OR OUTDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 6"D X 30"H (15CM X 76CM)
ILLUMINATION	<ul style="list-style-type: none">• DIFFUSE• LED 90CRI• 2128 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120 - 277V• 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• FIXED SURFACE, MOUNT TO A SOLID FOUNDATION WITH PLATE AND ANCHOR BOLTS (SUPPLIED)
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE



DIFFUSE

TESLA™ BOLLARD



PROJECT: _____
 TYPE: _____
 QUANTITY: _____



TSB - - - - -
 1 2 3 4 5 6

1.	630									
HEIGHT	6" DIA X 30"H (15CM X 76CM)									
2.	ILLUMINATION									
	19LED									
LED (W)	19W									
LUMENS	2128									
3.	30K			35K				40K		
LED CCT	3000K			3500K				4000K		
4.	120					277				
VOLTAGE	120V					277V				
5.	F04	F05	F09	F15	F16	F21	F24	F25	F26	F31
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC
	F32	F33	RAL							
	BRONZE METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)							
6.	---			EM				EMR		
EMERGENCY ¹	NONE			INTEGRAL				REMOTE		

1. 10W AT 90 MINUTES

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TOP/BOTTOM

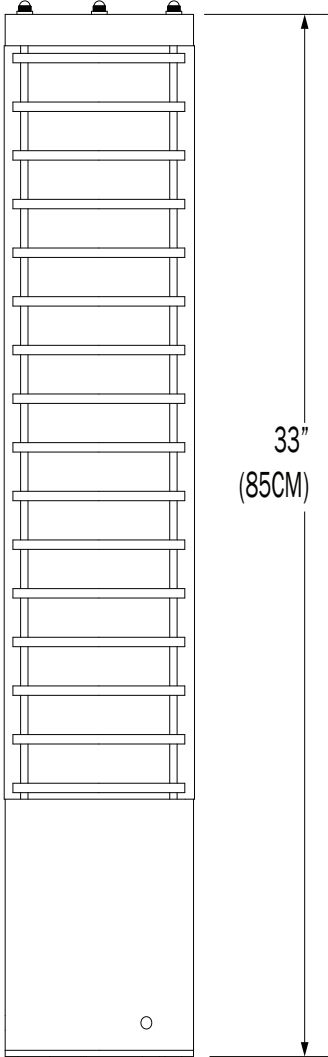

CUSTOM


NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <http://tmslighting.com/sales-agents.html>

DIFFUSE

PN	ILLUMINATION	LUMENS	WATTAGE
TSB	19LED	2128	19

IES INDOOR REPORT
PHOTOMETRIC FILENAME : TSB 630 19LED.IES

POLAR GRAPH

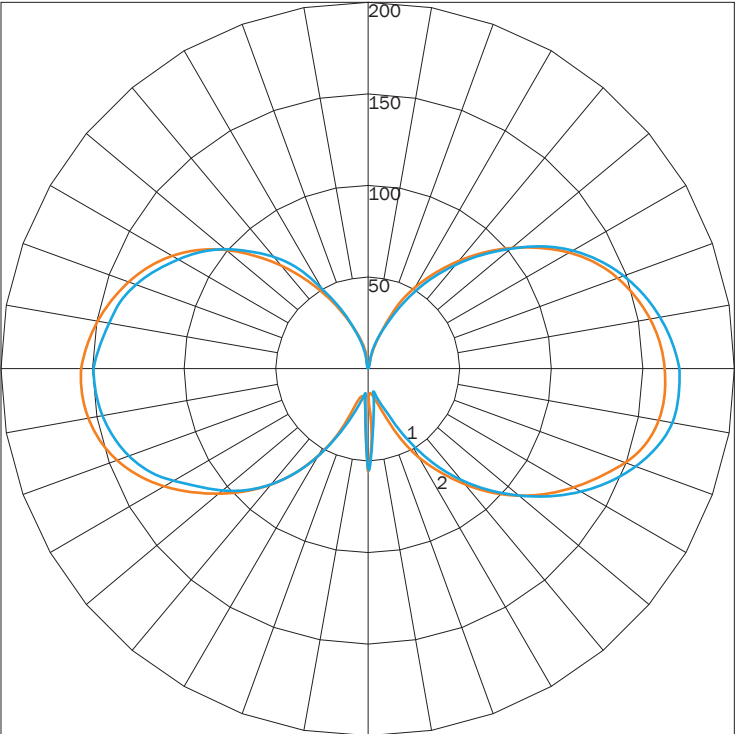

MAXIMUM CANDELA = 174.257 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 85
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	2128
TOTAL LUMINAIRE EFFICIENCY	63%
LUMINAIRE EFFICACY RATING	101
TOTAL LUMINAIRE WATTS	21

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F21
ARCH
BRONZE



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F32
METALLIC
BRONZE



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.