TEUER™ CEILING

PROJECT:	
TYPE:	
OHANTITY:	



TE811

APPLICATION	CEILINGINDOOR OR OUTDOOR RATED
DIMENSION	• 60"DIA X 18"H (152CM X 46CM)
ILLUMINATION	DIRECTLED 90CRI8,090 - 11,815 LUMENS
ELECTRICAL	120 - 277V10kA SURGE SUPRESSION STANDARD
DIFFUSERS	HIGH EFFICIENCY ACRYLIC
MOUNTING	• CEILING, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	• STEEL
FINISHES	 AVAILABLE BRUSHED, IN SEVERAL TMS PLATED, AND POWDER COATED FINISHES CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 100 LBS MAXIMUM





INDOOR

APPLICATION

TEUER™ CEILING

PROJECT:		
TYPE:		
QUANTITY: .		
7		
	0	
	OUTDOOR	
NATION		

2.	ILLUMINATION			
	162LED			
LED (W)	162W			
DIFFUSER	OP			
LUMENS	11815			

3.	30K	35K	40K
LED CCT	3000	3500	4000

4.	120	277
VOLTAGE	120V	277V

5.	SN	СН	ВС	AC	AB	SB	РВ	BR	F04	F05
	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUE COPPER	ANTIQUE BRASS	SATIN BRASS	POLISHED COPPER	BRUSHED ALUMINUM	MATTE WHITE	GLOSS WHITE
	F07	F08	F09	F10	F13	F14	F16	F16	F18	F21
FINISH	ZEUS BROWN	MIDNIGHT BLUE	PEWTER	FIRE RED	FOREST GREEN	SUNSHINE YELLOW	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE
	F24	F25	F26	F31	F32	F33	F45	RAL		
	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE	COPPER METALLIC	CUSTOM (SPECITY)		


6.	OP OP	SD	
DIFFUSER	OPAL - WHITE ACRYLIC	SAND - BLASTED WHITE	

7.	_	DIML
DIMMING	NONE	LED DIMMING (0 - 10V, CURRENT - SINKING)


TEUER™ CEILING

TE811

PROFILE



BOTTOM

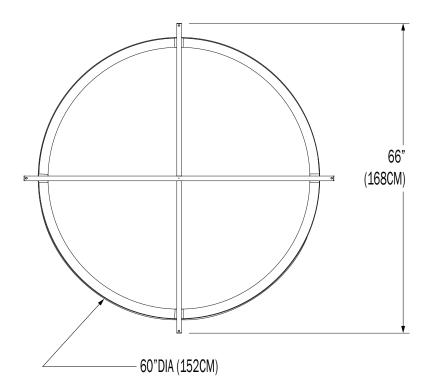

CUSTOM

...
NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: https://tmsiighting.com/sales-agents.html

DIRECT

POLAR GRAPH

PN	FINISH	DIFFUSER	LUMENS	WATTAGE
TE011	F32	OD	8090	162
TE811	F05	OP	11815	162


IES INDOOR REPORT

PHOTOMETRIC FILENAME: TE811 162LED F32 OP.IES


IES INDOOR REPORT

PHOTOMETRIC FILENAME: TE811 162LED F05 OP.IES

POLAR GRAPH

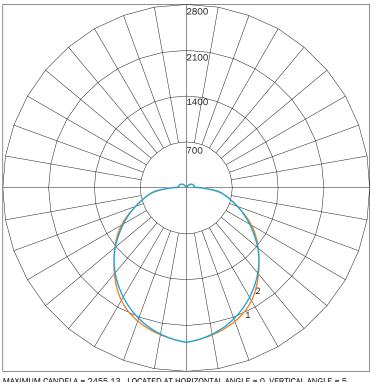

MAXIMUM CANDELA = 2455.13 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 5 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (09 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (00 - 180)

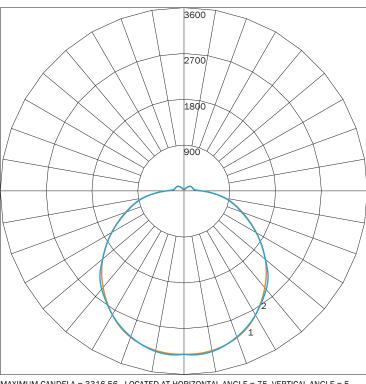

MAXIMUM CANDELA = 3316.56 LOCATED AT HORIZONTAL ANGLE = 75, VERTICAL ANGLE = 5 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS	8090	LUMINAIRE LUMENS	11815
TOTAL LUMINAIRE EFFICIENCY	NA	TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	43	LUMINAIRE EFFICACY RATING	63
TOTAL LUMINAIRE WATTS	186	TOTAL LUMINAIRE WATTS	186

TEUER[™] CEILING

AVAILABLE FINISHES



SN SATIN NICKEL



CH CHROME



BC BLACK CHROME



AC ANTIQUE COPPER



AB ANTIQUE BRASS



SB SATIN BRASS



PB POLISHED BRASS



BR BRUSHED ALUMINUM



F04 MATTE WHITE



F05 GLOSS WHITE



F07 ZEUS BROWN



F08 MIDNIGHT BLUE



F09 PEWTER



F10 FIRE RED



F13 FOREST GREEN



F14 SUNSHINE YELLOW



F15 MATTE BLACK



F16 GLOSS BLACK



F18 SATIN ALUMINUM



F21 ARCH BRONZE



F24 MELTED PLATINUM



F25 MELTED GOLD



F26 MELTED COPPER



F31 SILVER METALLIC



F32 METALLIC BRONZE



F33 PYRITE BRONZE



F45 COPPER METALLIC



NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.