

TOLICE™ PENDANT

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: 6325

APPLICATION	<ul style="list-style-type: none">• PENDANT MOUNT• INDOOR
DIMENSION	<ul style="list-style-type: none">• 24", 36", 48", 60", AND 72" (61CM, 91CM, 122CM, 152CM, 183CM)• PROFILE: 4.31"W X 2.75"H (11CM X 7CM)
ILLUMINATION	<ul style="list-style-type: none">• INDIRECT/DIRECT• LED 90CRI• 3,577 - 20,587 LUMENS
DRIVER	<ul style="list-style-type: none">• 120 - 277V (347V CONSULT FACTORY)• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• 96" (244CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES• MULTIPLE AIRCRAFT CABLES• SINGLE PLATE WITH AIRCRAFT CABLES
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING
WEIGHT	<ul style="list-style-type: none">• 45 LBS MAXIMUM



DIFFUSE

TOLICE™ PENDANT



PROJECT: _____

TYPE: _____

QUANTITY: _____


6325

1 2 3 4 5 6 7

1.	24	36	48	60	72					
SIZE	24" (61CM)	36" (91CM)	48" (122CM)	60" (152CM)	72" (183CM)					
LED (W)	35W	80W	124W	165W	208W					
LUMENS	3577	7985	11260	16394	20587					
2.	30K		35K		40K					
LED CCT	3000		3500		4000					
3.	UNI									
VOLTAGE	120 - 277V									
4.	MM					PS				
MOUNTING	MULTIPLE AIRCRAFT CABLES					SINGLE PLATE W/ AIRCRAFT CABLES				
5.	BC					WC				
CORD	BLACK DROP CORD					WHITE DROP CORD				
6.	F04	F05	F09	F15	F16	F18	F21	F31	F33	RAL
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)
7.	DIML									
DIMMING	0 - 10V DIMMING (1%)									

1. COMETA PS MOUNT ONLY AVAILABLE FOR SIZES 24, 36, AND 48

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

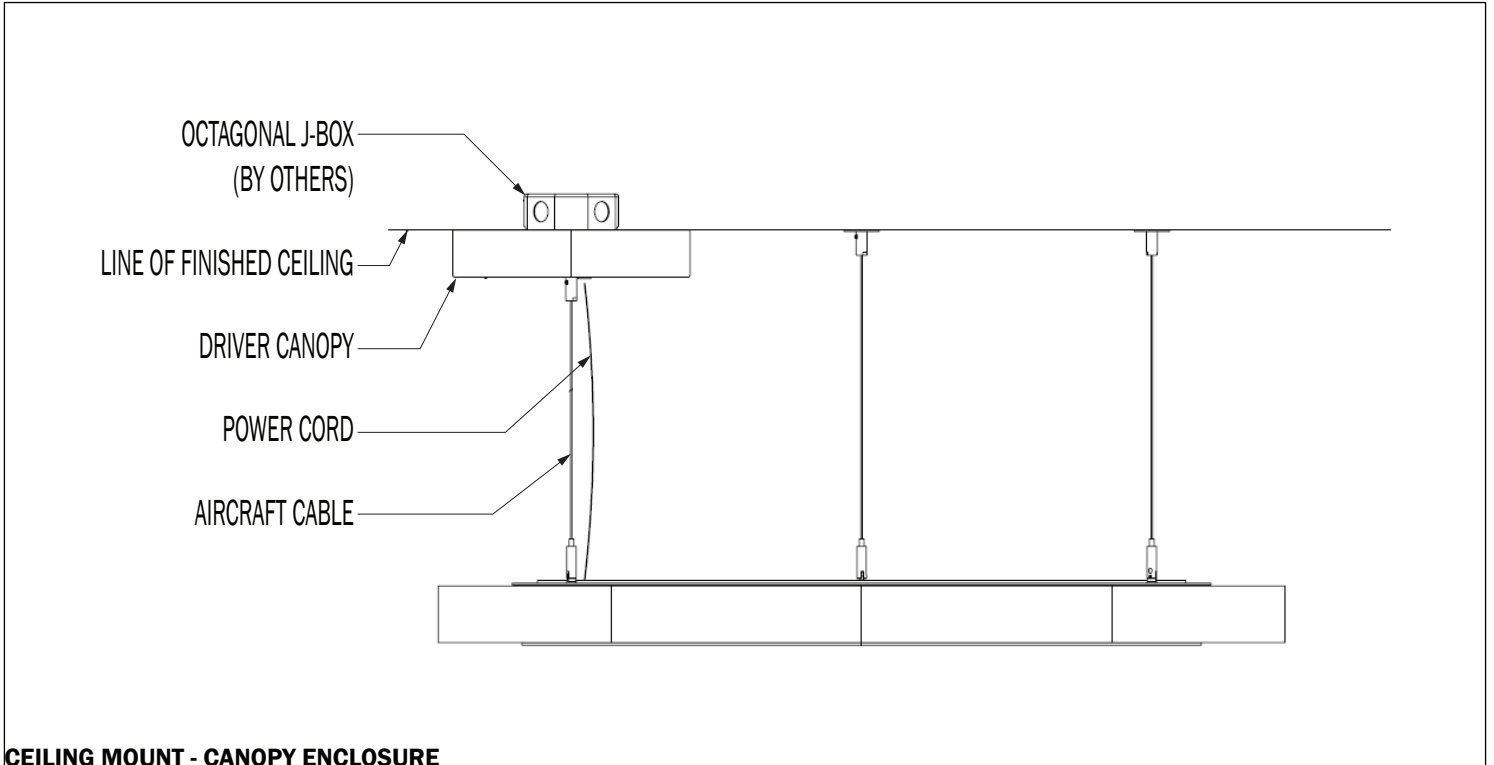


CEILING MOUNT - CANOPY ENCLOSURE


SIZE (INCH)	SECTION	AC CABLES	MOUNTING HEIGHT (SINGLE PLATE)	CANOPY SIZE (SIZE)	WEIGHT (LBS)
24" (61CM)	1	3	32"	12" (30.5CM)	25
36" (91CM)	1	3	54"	12" (30.5CM)	30
48" (122CM)	1	3	80"	12" (30.5CM)	35
60" (152CM)	1	3	NA	12" (30.5CM)	40
72" (183CM)	1	3	NA	14" (36CM)	45

6325

MM - MULTIPLE AIRCRAFT CABLES

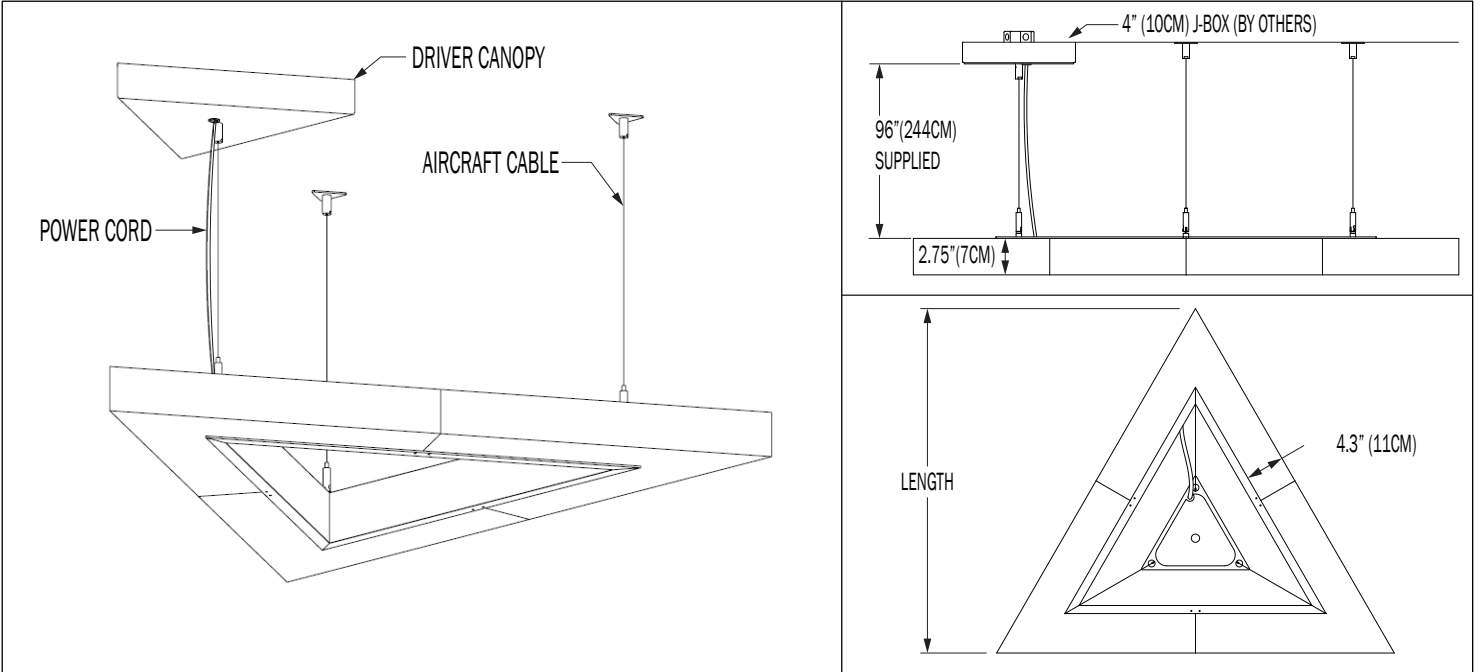

PS - SINGLE PLATE W/ AIRCRAFT CABLES

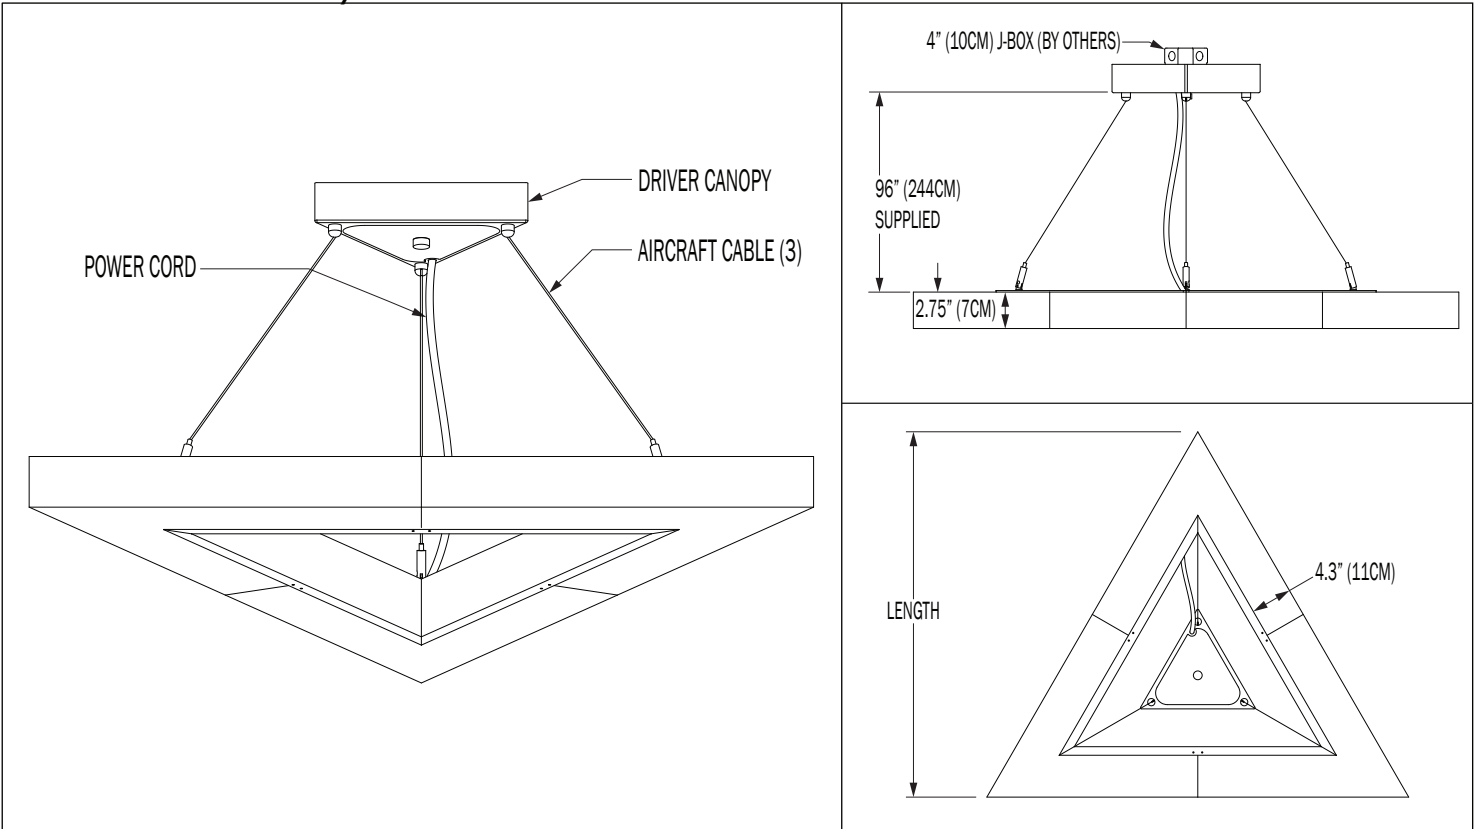


DIFFUSE

PN	SIZE (LENGTH)	LUMENS	WATTAGE
6325	24	3577	35
	36	7985	80
	48	11260	124
	60	16394	165
	72	20587	208

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6325 72 ID 35K F05.IES

POLAR GRAPH

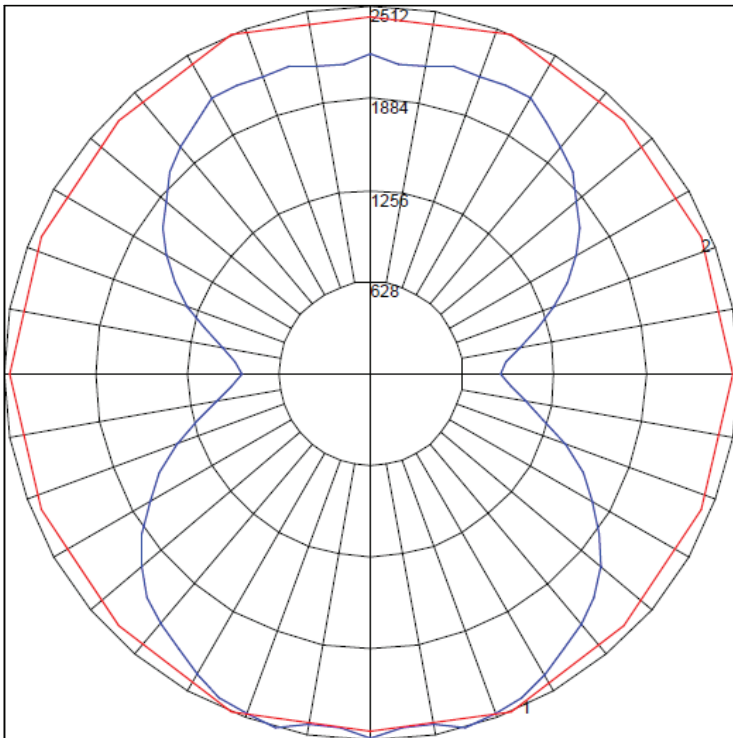

MAXIMUM CANDELA = 2512.4 - LOCATED AT HORIZONTAL ANGLE = 67.5, VERTICAL ANGLE = 15
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

LUMINAIRE LUMENS	20587
TOTAL LUMINAIRE EFFICIENCY	80%
LUMINAIRE EFFICACY RATING	99
TOTAL LUMINAIRE WATTS	208

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.