

# TOLICE™ PENDANT

PROJECT: \_\_\_\_\_



TYPE: \_\_\_\_\_

QUANTITY: \_\_\_\_\_



PN: 6325

<b>ILLUMINATION</b>	<ul style="list-style-type: none"> <li>• 3,577 - 20,587 LUMENS</li> <li>• DIFFUSE</li> <li>• LED 90CRI</li> </ul>
<b>APPLICATION</b>	<ul style="list-style-type: none"> <li>• PENDANT MOUNT</li> <li>• RATED: INDOOR</li> </ul>
<b>DIMENSION</b>	<ul style="list-style-type: none"> <li>• 24", 36", 48", 60", AND 72" DIA. (61cm, 91cm, 122cm, 152cm, and 183cm)</li> <li>• PROFILE: 4.31"W X 2.75"H (11cm X 7cm)</li> </ul>
<b>ELECTRICAL</b>	<ul style="list-style-type: none"> <li>• 120 - 277V</li> <li>• 10KV SURGE SUPPRESSION</li> </ul>
<b>DIFFUSERS</b>	<ul style="list-style-type: none"> <li>• HIGH EFFICIENCY ACRYLIC</li> </ul>
<b>MOUNTING</b>	<ul style="list-style-type: none"> <li>• 120" (305cm) BLACK OR WHITE DROP CORD WITH AC CABLES</li> <li>• 120" POWER OVER SUSPENSION</li> </ul>
<b>LED DRIVER</b>	<ul style="list-style-type: none"> <li>• CANOPY OR REMOTE MOUNT</li> </ul>
<b>CONSTRUCTION</b>	<ul style="list-style-type: none"> <li>• ALUMINUM</li> </ul>
<b>FINISHES</b>	<ul style="list-style-type: none"> <li>• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES</li> <li>• CUSTOM RAL FINISHES AVAILABLE</li> </ul>
<b>DIMMING</b>	<ul style="list-style-type: none"> <li>• 0 - 10V (1%) DIMMING (120-277V)</li> <li>• LINE VOLTAGE/TRIAC/ELV (120V ONLY)</li> <li>• LUTRON HI-LUME (1%) DIMMING (120-277V)</li> </ul>
<b>WEIGHT</b>	<ul style="list-style-type: none"> <li>• 25 LBS MINIMUM, 45 LBS MAXIMUM</li> </ul>

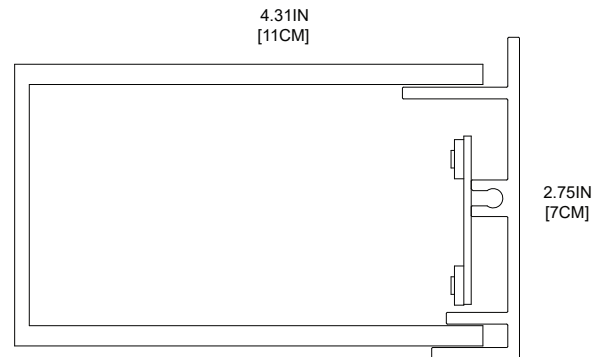

DIFFUSE

# TOLICE™ PENDANT



PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

**6325**

1 2 3 4 5 6 7

1.	24	36	48	60	72
SIZE	24" (61CM)	36" (91CM)	48" (122CM)	60" (152CM)	72" (183CM)
LED (W)	35W	80W	124W	165W	208W
LUMENS	3577	7985	11260	16394	20587

2.	H	M	L	C: _____
OUTPUT	100% LUMENS	75% LUMENS	50% LUMENS	[CUSTOM]% LUMENS

3.	30K	35K	40K
LED CCT	3000	3500	4000

4.	MMCD	MMRM	PSCD	PSRM
MOUNTING	MULTIPLE CABLES WITH CANOPY DRIVER	MULTIPLE CABLES WITH REMOTE DRIVER	SINGLE POINT WITH CANOPY DRIVER	SINGLE POINT WITH REMOTE DRIVER


5.	BC	WC	POS
CORD	BLACK DROP CORD WITH AIRCRAFT CABLES	WHITE DROP CORD WITH AIRCRAFT CABLES	POWER OVER SUSPENSION (SILVER ONLY) <small>(UP TO 36" ONLY) (NOT APPLICABLE FOR MMCD COMBINATION)</small>

6.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART							F04	F05	F15	F16	F09	F31	F18
FINISH								MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM

7.	DIML	DIME	DIMV
DIMMING	0-10V (1%) (120-277V)	LUTRON HI-LUME (1%) (120-277V) <small>(UP TO 36" ONLY)</small>	LINE VOLTAGE/TRIAC/ELV (120V ONLY)

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

# TOLICE™ PENDANT


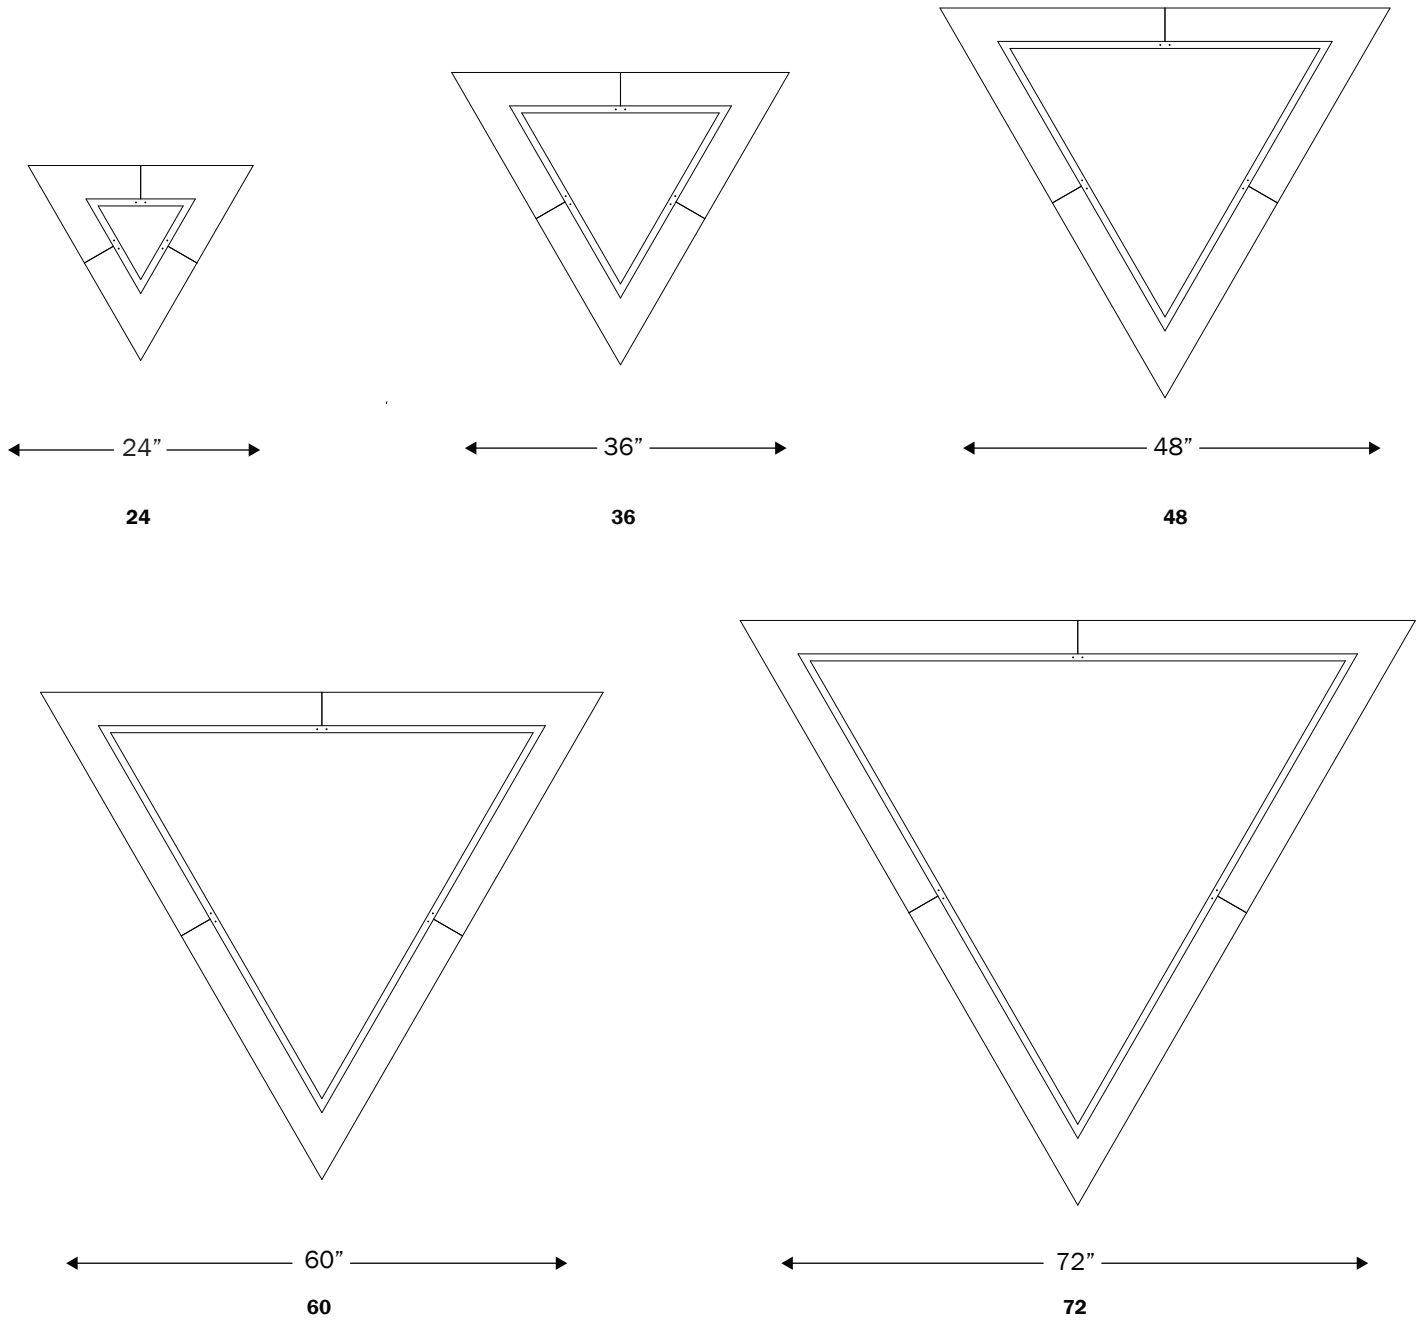


SIZES	ACTUAL SIZE	MOUNTING POINT	MINIMUM DISTANCE <sup>1 2</sup>	CANOPY SIZE		NUMBER OF CANOPY	WEIGHT (POUNDS - LBS)	SECTIONS
				MMCD	PSCD - PSRM			
24	24"	4	22"	8.5"	13.5"	1	25	1
36	36"	4	35"	13.5"	17"	1	30	1
48	48"	4	53"	13.5"	17"	1	35	1
60	60"	4	69"	17"	19"	1	40	1
72	72"	4	88"	19"	19"	1	45	1



1. ONLY FOR PS (SINGLE POINT) MOUNTING OPTION, THIS IS THE MINIMUM DISTANCE FROM CEILING TO THE BOTTOM OF THE FIXTURE  
 2. MINIMUM CABLE MOUNTING ANGLE IS 70°

## POS (POWER OVER SUSPENSION)



### MMRM COMBINATION (MULTIPLE CABLES, REMOTE MOUNT DRIVER)

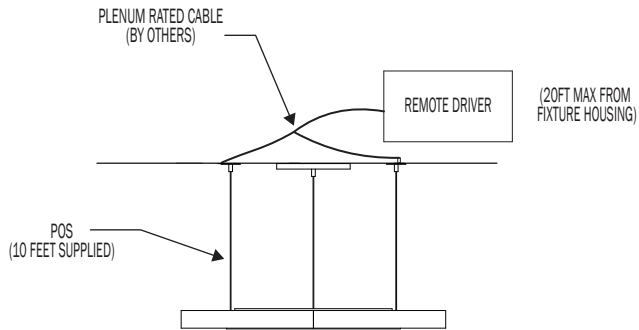

### PSCD COMBINATION (SINGLE POINT, CANOPY MOUNT DRIVER)

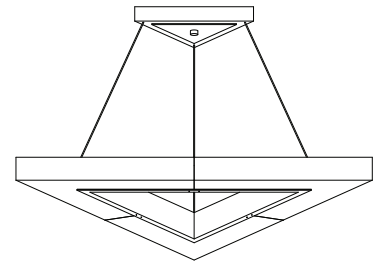
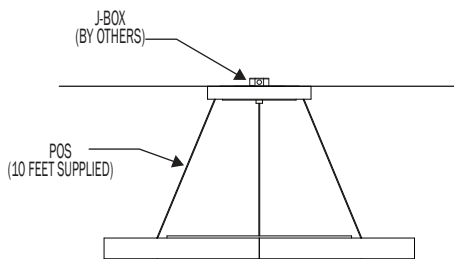


### PSRM COMBINATION (SINGLE POINT, REMOTE MOUNT DRIVER)

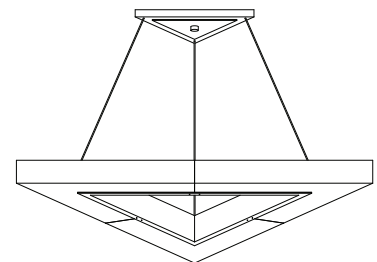
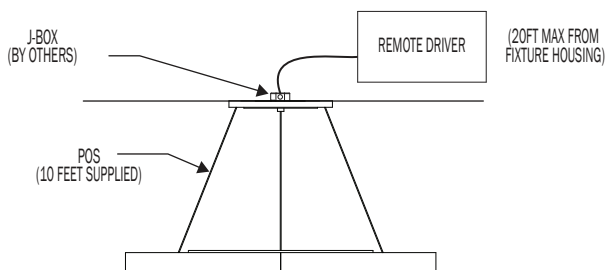


## DROP CORD



### MMCD COMBINATION (MUTIPLE CABLES, CANOPY MOUNT DRIVER)

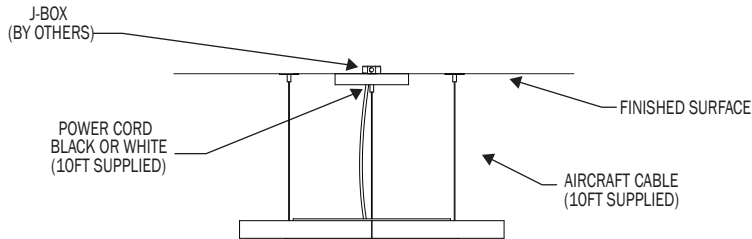



### MMRM COMBINATION (MUTIPLE CABLES, REMOTE MOUNT DRIVER)

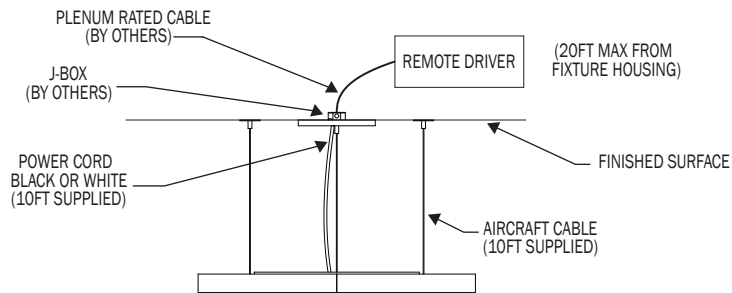

### PSCD COMBINATION (SINGLE POINT, CANOPY MOUNT DRIVER)

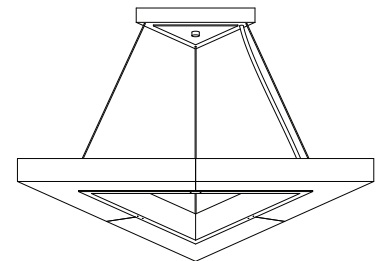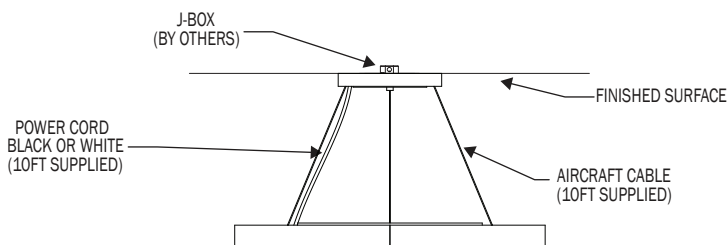

### PSRM COMBINATION (SINGLE POINT, REMOTE MOUNT DRIVER)

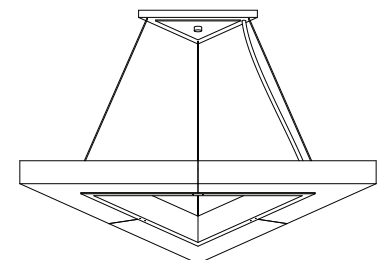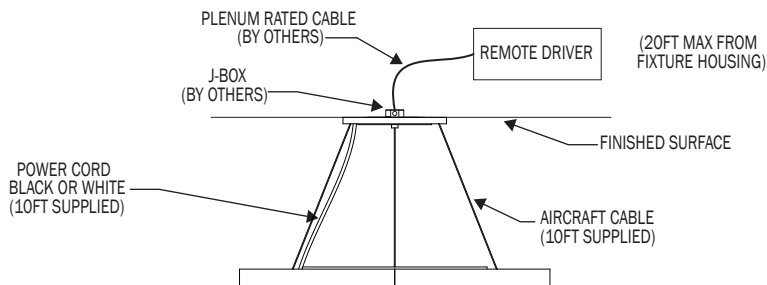


## DIFFUSE

PN	SIZE (LENGTH)	LUMENS	WATTAGE
6325	24	3577	35
	36	7985	80
	48	11260	124
	60	16394	165
	72	20587	208

### IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6325 72 ID 35K F05.IES

### POLAR GRAPH

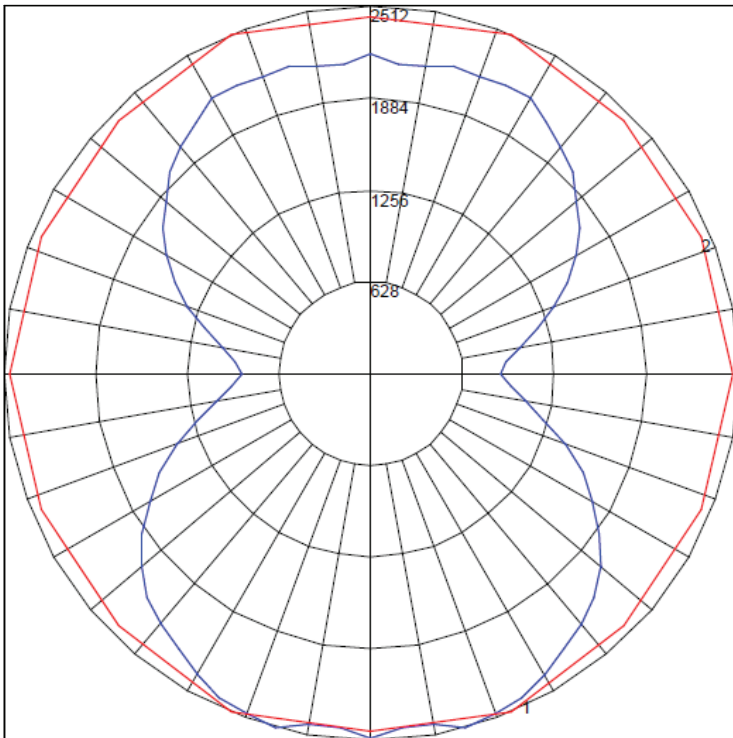

MAXIMUM CANDELA = 2512.4 - LOCATED AT HORIZONTAL ANGLE = 67.5, VERTICAL ANGLE = 15  
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)  
 # 2 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (5) (THROUGH MAX. CD.)

<b>LUMINAIRE LUMENS</b>	20587
<b>TOTAL LUMINAIRE EFFICIENCY</b>	80%
<b>LUMINAIRE EFFICACY RATING</b>	99
<b>TOTAL LUMINAIRE WATTS</b>	208

## FINISHES



## PREMIUM FINISHES



NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.