

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: TUW

APPLICATION	• WALL MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	• 14", 24", AND 33" (36CM, 62CM, 84CM)
ILLUMINATION	• DIFFUSE • LED 90CRI • 547 - 1,593 LUMENS
ELECTRICAL	• 120 - 277V (347V CONSULT FACTORY) • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 10 LBS MAXIMUM



DIFFUSE



TUCORE™ WALL

PROJECT: _____

TYPE: _____

QUANTITY: _____

TUW - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 -


1.	I					O				
APPLICATION	INDOOR					OUTDOOR				
2.	14			24			33			
SIZE	14"H X 5.8"D X 7.5"D (36CM X 17CM X 19CM)			24.25"H X 11"D X 13.8"D (62CM X 28CM X 35CM)			33"H X 11"D X 13.8"D (84CM X 28CM X 35CM)			
3.	15LED					30LED				
ILLUMINATION	15W LED					30W LED				
LED (W)	15W					30W				
LUMENS	SIZE 14" : 774 SIZE 24" : 669					SIZE 33" : 1593				
4.	30K			35K			40K			
LED CCT	3000K			3500K			4000K			
5.	120					277				
VOLTAGE	120V					277V				
6.	F04	F05	F09	F15	F16	F18	F21	F24	F25	F26
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER
	F31	F32	F33	RAL						
	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)						
7.	---					DIML				
DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)				
8.	---			EMR			EMCR			
EMERGENCY ¹	NONE			REMOTE			REMOTE COLD PACK			

1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.


TUW 14"

5LB

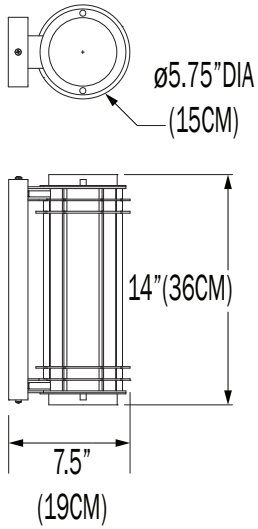


TUW 24"

7LB

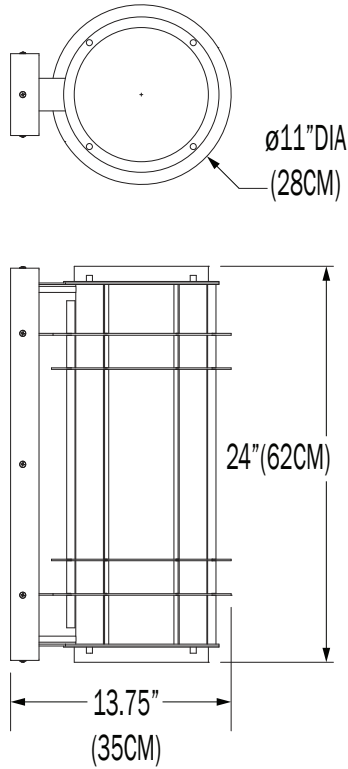

TUW 33"

10LB

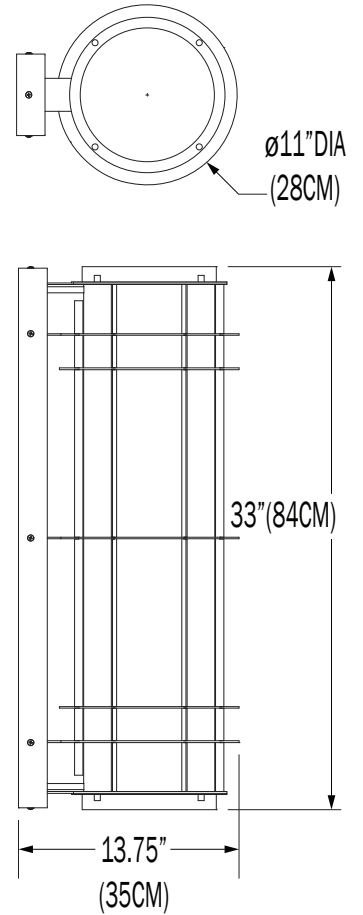

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


DIFFUSE

PN	SIZE (H)	ILLUMINATION	FINISH	LUMENS	WATTAGE
TUW	14	15LED	F32	547	15
			F31	744	15
	24	15LED	F32	563	15
			F31	769	15
	33	30LED	F32	1271	30
			F31	1593	30

IES INDOOR REPORT

PHOTOMETRIC FILENAME : TUW 14 15LED F32.IES

POLAR GRAPH

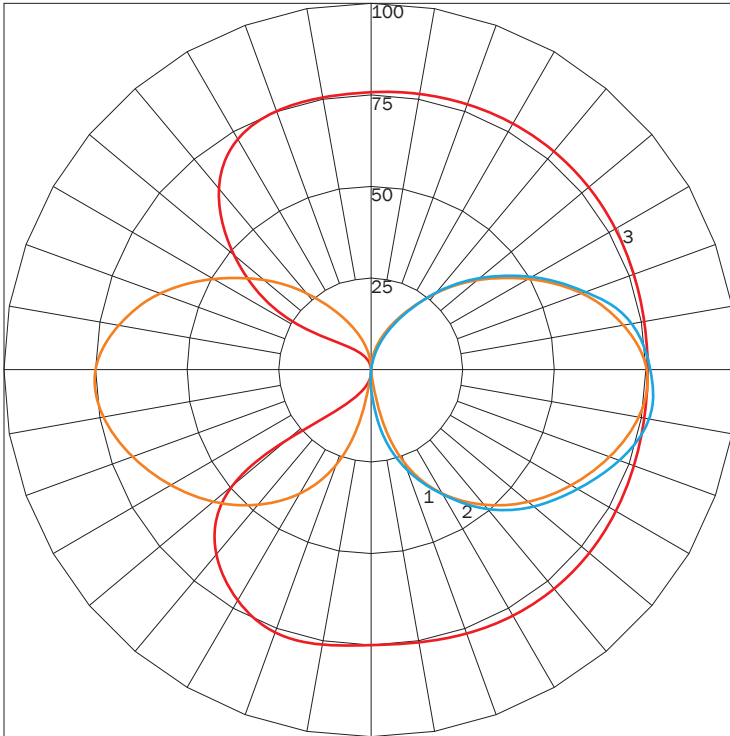

MAXIMUM CANDELA = 79.9 LOCATED AT HORIZONTAL ANGLE = 60, VERTICAL ANGLE = 90
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS

547

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

32


TOTAL LUMINAIRE WATTS

17

IES INDOOR REPORT

PHOTOMETRIC FILENAME : TUW 33 30LED F31.IES

POLAR GRAPH

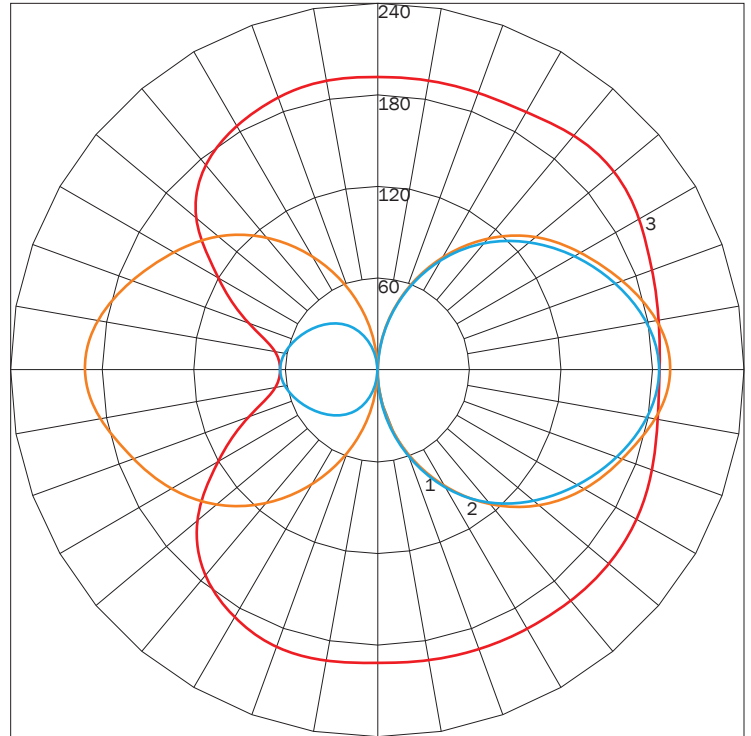

MAXIMUM CANDELA = 207.3 LOCATED AT HORIZONTAL ANGLE = 45, VERTICAL ANGLE = 85
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS

1593

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

46

TOTAL LUMINAIRE WATTS

35

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F09
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F32
METALLIC
BRONZE



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.