

TURM 2TM PENDANT

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: 762TU

APPLICATION	• PENDANT MOUNT • INDOOR RATED
DIMENSION	• 35.5"W X 35.5"L X 50"H (90CM X 90CM X 127CM)
ILLUMINATION	• DIFFUSE • LED 90CRI • 7,796 - 14,119 LUMENS
ELECTRICAL	• 120 - 277V (347V CONSULT FACTORY) • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLES
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING (1%)
WEIGHT	• 90 LB MAXIMUM



DIFFUSE

TMSLIGHTING





TURM 2™ PENDANT

PROJECT: _____

TYPE: _____

QUANTITY: _____

762TU



1 2 3 4 5 6 7

1.	ILLUMINATION									
	182LED									
LED (W)	182W									
DIFFUSER	OP					SD				
LUMENS	7796					14119				
2.	30K			35K				40K		
LED CCT	3000K			3500K				4000K		
3.	120					277				
VOLTAGE	120V					277V				
4.	BC					WC				
CORD	BLACK DROP CORD					WHITE DROP CORD				
5.	F04	F05	F07	F08	F09	F10	F13	F14	F15	F16
FINISH	MATTE WHITE	MATTE BLACK	ZEUS BROWN	MIDNIGHT BLUE	PEWTER	FIRE RED	FOREST GREEN	SUNSHINE YELLOW	MATTE BLACK	GLOSS BLACK
	F18	F21	F24	F25	F26	F31	F32	F33	F45	RAL
	SATIN ALUMINUM	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	BRONZE METALLIC	PYRITE BRONZE	COPPER METALLIC	CUSTOM (SPECIFY)
6.	SD									
DIFFUSER	SAND - BLASTED WHITE									
7.	---					DIML				
DIMMING	NONE					LED DIMMING (1 - 10V, CURRENT - SINKING)				

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING

TURM 2TM PENDANT

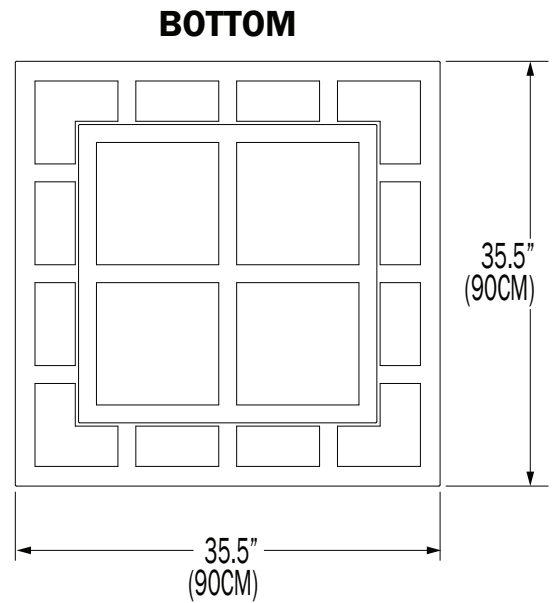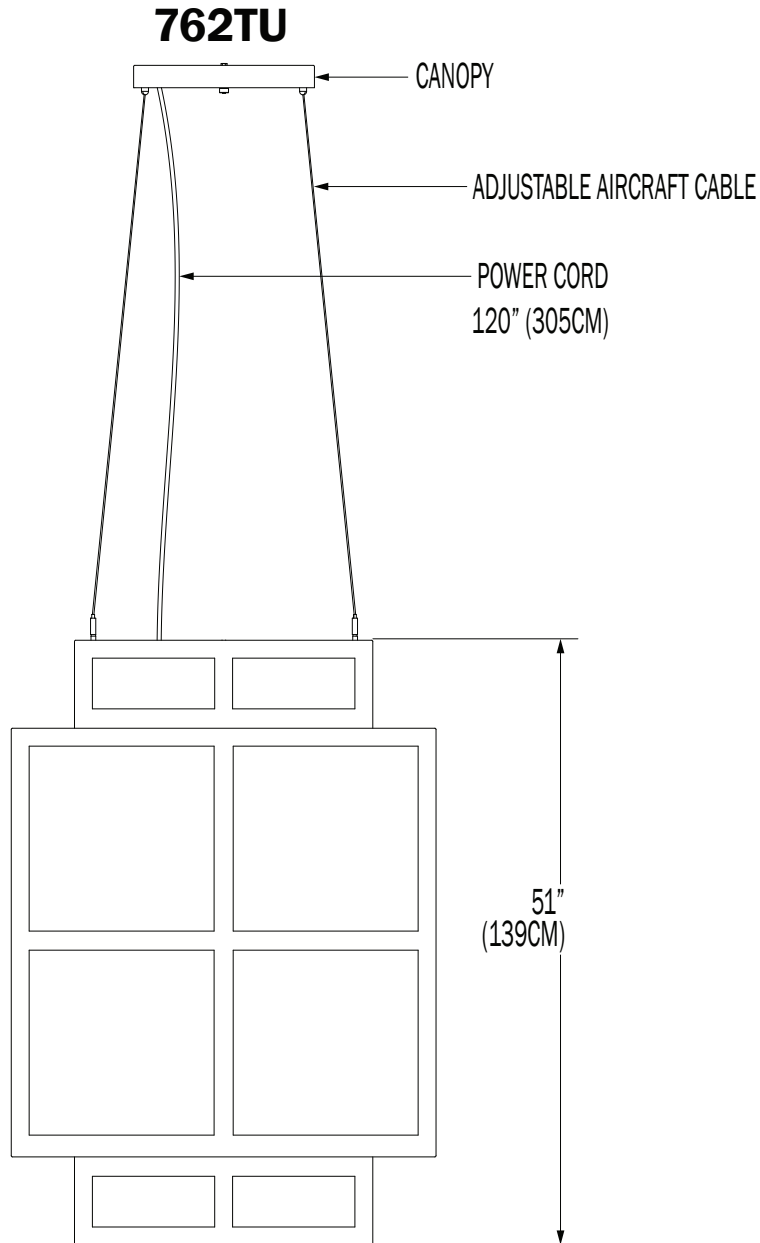

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

TMSLIGHTING


DIFFUSE

PN	DIFFUSER	LUMENS	WATTAGE
762TU	OP	7796	182
	SD	14119	182

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 762TU 182LED F05 OP.IES

POLAR GRAPH

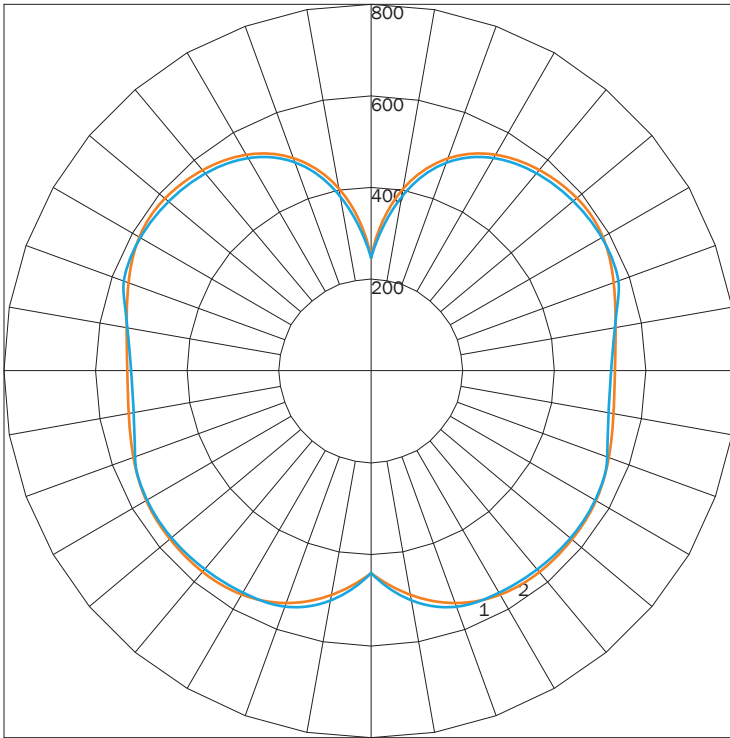

MAXIMUM CANDELA = 777.28 LOCATED AT HORIZONTAL ANGLE = 45, VERTICAL ANGLE = 140
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

7796

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

38


TOTAL LUMINAIRE WATTS

206

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 762TU 182LED F05 SD.IES

POLAR GRAPH

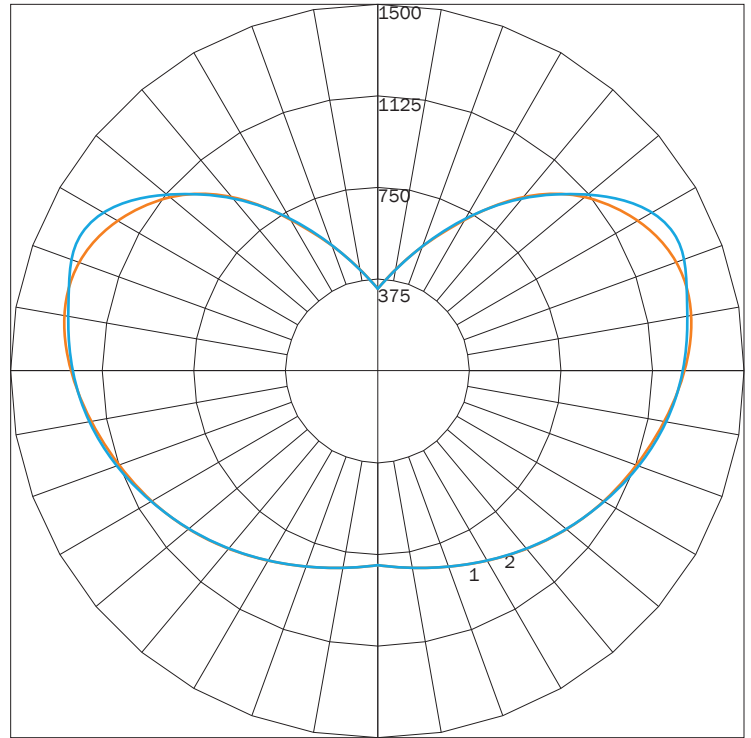

MAXIMUM CANDELA = 1376.92 LOCATED AT HORIZONTAL ANGLE = 150, VERTICAL ANGLE = 105
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

14119

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

69

TOTAL LUMINAIRE WATTS

206

AVAILABLE FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F07
ZEUS
BROWN



F08
MIDNIGHT
BLUE



F09
PEWTER



F10
FIRE
RED



F13
FOREST
GREEN



F14
SUNSHINE
YELLOW



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F32
METALLIC
BRONZE



F33
PYRITE
BRONZE



F45
COPPER
METALLIC



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.