

U101 UP-DOWN™ WALL

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: U101

APPLICATION	<ul style="list-style-type: none">• WALL MOUNT• INDOOR OR OUTDOOR RATED
DIMENSION	<ul style="list-style-type: none">• 9"H X 6.5"W X 11.5"D (23CM X 17CM X 29CM)
ILLUMINATION	<ul style="list-style-type: none">• DIFFUSE• LED 90CRI• INCANDESCENT MEDIUM BASE SOCKET• 1,143 LUMENS
ELECTRICAL	<ul style="list-style-type: none">• 120V, 277V AND 347V• 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	<ul style="list-style-type: none">• HIGH EFFICIENCY ACRYLIC
MOUNTING	<ul style="list-style-type: none">• WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	<ul style="list-style-type: none">• ALUMINUM
FINISHES	<ul style="list-style-type: none">• AVAILABLE ANODIZED, BRUSHED, AND IN SEVERAL TMS POWDER COATED FINISHES• CUSTOM RAL FINISHES AVAILABLE
DIMMING	<ul style="list-style-type: none">• 0 - 10V STANDARD DIMMING
WEIGHT	<ul style="list-style-type: none">• 6 LBS MAXIMUM



U101 UP-DOWN™ WALL



PROJECT: _____
 TYPE: _____
 QUANTITY: _____

U101

1 2 3 4 5 6 7

1.	I					O				
APPLICATION	INDOOR					OUTDOOR				
2.	150IN					15LED				
ILLUMINATION	150W INCANDESCENT					15W LED				
LED (W)	150W					15W				
LUMESN	---					1143				
3.	---		30K			35K			40K	
LED CCT	NONE		3000K			3500K			4000K	
4.	120			277			347			
VOLTAGE	120V			277V			347V			
5.	AN	BR	F04	F05	F08	F09	F10	F13	F14	F15
FINISH	ANODIZED (SILVER)	BRUSHED ALUMINUM	MATTE WHITE	GLOSS WHITE	MIDNIGHT BLUE	PEWTER	FIRE RED	FOREST GREEN	SUNSHINE YELLOW	MATTE BLACK
	F16	F18	F21	F24	F25	F26	F31	F33	RAL	
	GLOSS BLACK	SATIN ALUMINUM	ARCH BRONZE	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)	
6.	---					DIML				
DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)				
7.	---			EMR			EMCR			
EMERGENCY ¹	NONE			REMOTE			REMOTE COLD PACK			


1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.


U101 UP-DOWN™ WALL

U101

TOP/BOTTOM

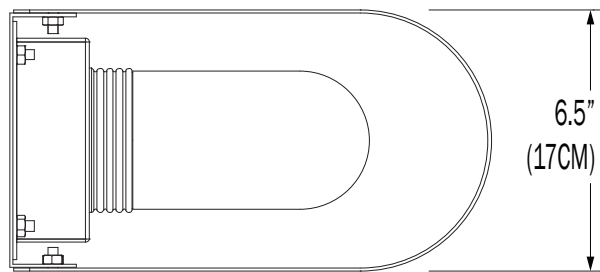

PROFILE

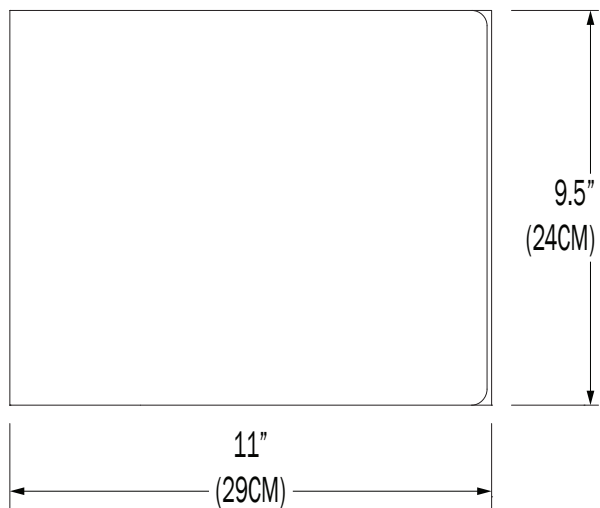

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

U101 UP-DOWN™ WALL


DIFFUSE

PN	LUMENS	WATTAGE
U101	1143	15

IES INDOOR REPORT

PHOTOMETRIC FILENAME : U101 15LED F05.IES

POLAR GRAPH

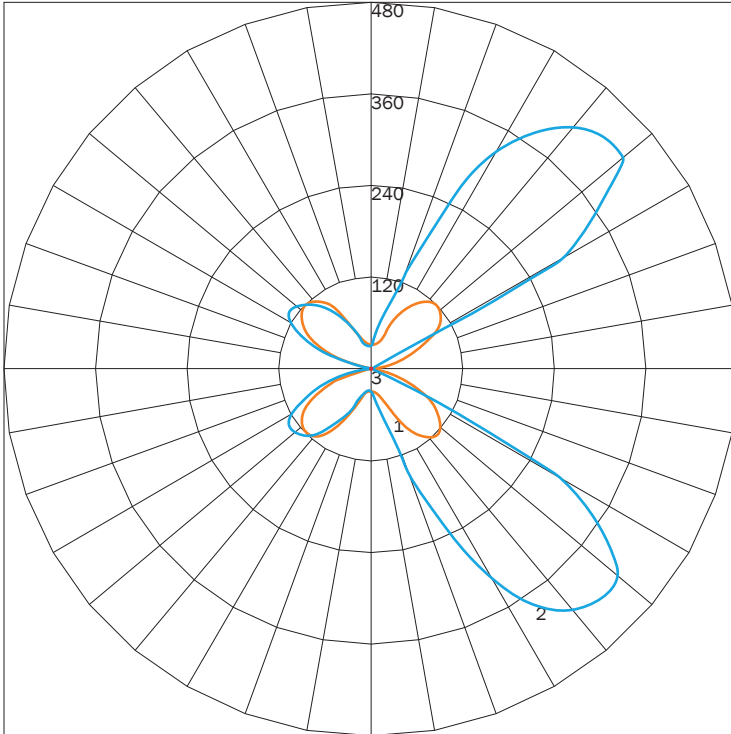

MAXIMUM CANDELA = 430.97 - LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 135
1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS	1143
TOTAL LUMINAIRE EFFICIENCY	NA
LUMINAIRE EFFICACY RATING	67
TOTAL LUMINAIRE WATTS	17

U101 UP-DOWN™ WALL

AVAILABLE FINISHES



AN
ANODIZED
(SILVER)



BR
BRUSHED
ALUMINUM



F04
MATTE
WHITE



F05
GLOSS
WHITE



F08
MIDNIGHT
BLUE



F09
PEWTER



F10
FIRE
RED



F13
FOREST
GREEN



F14
SUNSHINE
YELLOW



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



F24
MELTED
PLATINUM



F25
MELTED
GOLD



F26
MELTED
COPPER



F31
SILVER
METALLIC



F33
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.